




# ecoTEC plus

VU GB .../5-5

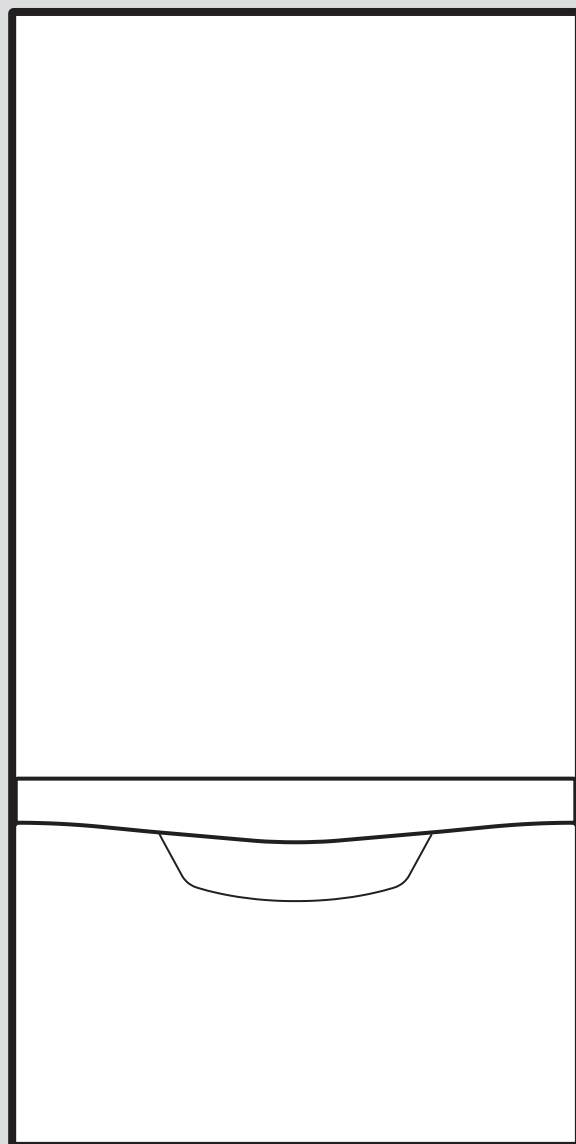

# Installation and maintenance instructions

## Contents

|          |                                                                |           |           |                                                                                |           |
|----------|----------------------------------------------------------------|-----------|-----------|--------------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>Safety .....</b>                                            | <b>4</b>  | 9.5       | Running the installation assistants .....                                      | 29        |
| 1.1      | Intended use .....                                             | 4         | 9.6       | Restarting the installation assistants .....                                   | 30        |
| 1.2      | Qualification .....                                            | 4         | 9.7       | Using check programmes .....                                                   | 30        |
| 1.3      | General safety information .....                               | 4         | 9.8       | Test programmes.....                                                           | 30        |
| 1.4      | Regulations (directives, laws, standards) .....                | 6         | 9.9       | Checking and treating the heating water/filling and supplementary water .....  | 30        |
| 1.5      | List of relevant standards for Great Britain and Ireland ..... | 6         | 9.10      | Filling the condensate trap .....                                              | 31        |
| <b>2</b> | <b>Guarantee and Customer Service .....</b>                    | <b>7</b>  | 9.11      | Reading off the filling pressure .....                                         | 31        |
| <b>3</b> | <b>Technical data .....</b>                                    | <b>8</b>  | 9.12      | Preventing low water pressure .....                                            | 31        |
| <b>4</b> | <b>Notes on the documentation .....</b>                        | <b>10</b> | 9.13      | Flushing the heating system for the first time ("cold") .....                  | 31        |
| <b>5</b> | <b>Product description.....</b>                                | <b>10</b> | 9.14      | Filling and purging the boiler and heating system .....                        | 32        |
| 5.1      | CE marking .....                                               | 10        | 9.15      | Checking the gas setting .....                                                 | 32        |
| 5.2      | Energy Saving Trust Endorsed Products .....                    | 10        | 9.16      | Thoroughly flushing the heating system ("hot") .....                           | 34        |
| 5.3      | Hot Water Association .....                                    | 10        | 9.17      | Checking leak-tightness .....                                                  | 35        |
| 5.4      | Information on the data plate .....                            | 10        | <b>10</b> | <b>Adapting the unit to the heating installation.....</b>                      | <b>35</b> |
| 5.5      | Design of the product.....                                     | 11        | 10.1      | Calling up diagnostics codes .....                                             | 35        |
| 5.6      | Safety Devices.....                                            | 11        | 10.2      | Setting the partial heat load .....                                            | 35        |
| <b>6</b> | <b>Set-up.....</b>                                             | <b>13</b> | 10.3      | Setting the pump overrun .....                                                 | 36        |
| 6.1      | Checking the scope of delivery .....                           | 13        | 10.4      | Setting the maximum flow temperature .....                                     | 36        |
| 6.2      | Product dimensions and connection dimensions.....              | 13        | 10.5      | Setting the return temperature control system ....                             | 36        |
| 6.3      | Installation site .....                                        | 14        | 10.6      | Burner anti-cycling time .....                                                 | 36        |
| 6.4      | Minimum clearances and installation clearances .....           | 14        | 10.7      | Setting the maintenance interval .....                                         | 36        |
| 6.5      | Compartment Ventilation .....                                  | 14        | 10.8      | Pump output (high-efficiency pump).....                                        | 36        |
| 6.6      | Air/flue pipe .....                                            | 14        | <b>11</b> | <b>Handing over to the end user .....</b>                                      | <b>38</b> |
| 6.7      | Using the mounting template .....                              | 18        | <b>12</b> | <b>Inspection and maintenance .....</b>                                        | <b>39</b> |
| 6.8      | Wall-mounting the product.....                                 | 18        | 12.1      | Complete Service Interval Record section .....                                 | 39        |
| 6.9      | Removing/installing the front casing .....                     | 18        | 12.2      | Using original seals.....                                                      | 39        |
| 6.10     | Removing/installing the upper casing .....                     | 18        | 12.3      | Inspection and maintenance.....                                                | 39        |
| 6.11     | Removing/installing the side section (as required) .....       | 19        | 12.4      | Auxiliary service equipment: .....                                             | 39        |
| <b>7</b> | <b>Installation.....</b>                                       | <b>20</b> | 12.5      | Observing inspection and maintenance intervals .....                           | 39        |
| 7.1      | Installation prerequisites .....                               | 20        | 12.6      | Preparing the maintenance work.....                                            | 40        |
| 7.2      | Preparing for installation .....                               | 20        | 12.7      | Using the function menu .....                                                  | 40        |
| 7.3      | Descaling the water .....                                      | 20        | 12.8      | Carrying out electronics self-tests .....                                      | 40        |
| 7.4      | Gas installation .....                                         | 20        | 12.9      | Checking the electrical plug connections .....                                 | 40        |
| 7.5      | Hydraulics installation .....                                  | 21        | 12.10     | Removing the gas-air mixture unit.....                                         | 40        |
| 7.6      | Flue installation.....                                         | 25        | 12.11     | Cleaning the heat exchanger.....                                               | 42        |
| 7.7      | Electrical installation .....                                  | 25        | 12.12     | Checking the burner .....                                                      | 42        |
| <b>8</b> | <b>Operation.....</b>                                          | <b>28</b> | 12.13     | Replacing the ignition and ionisation electrodes .....                         | 42        |
| 8.1      | Operating concept of the product .....                         | 28        | 12.14     | Cleaning the condensate trap.....                                              | 43        |
| 8.2      | Calling up the installer level.....                            | 28        | 12.15     | Installing the gas-air mixture unit.....                                       | 43        |
| 8.3      | Live Monitor (status codes) .....                              | 28        | 12.16     | Draining the product .....                                                     | 44        |
| <b>9</b> | <b>Start-up .....</b>                                          | <b>29</b> | 12.17     | Checking the filling pressure of the boiler and the heating installation ..... | 44        |
| 9.1      | Carrying out the initial start-up.....                         | 29        | 12.18     | Checking the quality of the heating water.....                                 | 44        |
| 9.2      | Auxiliary service equipment.....                               | 29        | 12.19     | Completing inspection and maintenance work ....                                | 44        |
| 9.3      | Switching on the product .....                                 | 29        | 12.20     | Checking the product for leak-tightness .....                                  | 44        |
| 9.4      | Calling up unit configuration and diagnostics menu.....        | 29        | <b>13</b> | <b>Troubleshooting .....</b>                                                   | <b>44</b> |
|          |                                                                |           | 13.1      | Contacting your service partner .....                                          | 44        |
|          |                                                                |           | 13.2      | Calling up service messages .....                                              | 44        |
|          |                                                                |           | 13.3      | Reading off the fault codes .....                                              | 45        |

|                 |                                                        |           |
|-----------------|--------------------------------------------------------|-----------|
| 13.4            | Querying the fault memory .....                        | 45        |
| 13.5            | Resetting the fault memory.....                        | 45        |
| 13.6            | Resetting parameters to factory settings .....         | 45        |
| 13.7            | Performing diagnostics .....                           | 45        |
| 13.8            | Using check programmes .....                           | 45        |
| 13.9            | Preparing the repair work .....                        | 45        |
| 13.10           | Procuring spare parts .....                            | 45        |
| 13.11           | Replacing defective components.....                    | 45        |
| 13.12           | Completing repair work.....                            | 48        |
| 13.13           | Checking the product for leak-tightness .....          | 48        |
| <b>14</b>       | <b>Decommissioning</b> .....                           | <b>48</b> |
| 14.1            | Temporarily decommissioning the product.....           | 48        |
| 14.2            | Permanently decommissioning the product.....           | 48        |
| <b>15</b>       | <b>Disposing of the packaging</b> .....                | <b>48</b> |
| <b>Appendix</b> | <b>.....</b>                                           | <b>49</b> |
| <b>A</b>        | <b>Inspection and maintenance work</b> .....           | <b>49</b> |
| <b>B</b>        | <b>Installer level menu structure – Overview</b> ..... | <b>51</b> |
| <b>C</b>        | <b>Overview of diagnostics codes</b> .....             | <b>53</b> |
| <b>D</b>        | <b>Status codes – Overview</b> .....                   | <b>55</b> |
| <b>E</b>        | <b>Overview of fault codes</b> .....                   | <b>56</b> |
| <b>F</b>        | <b>Wiring diagram</b> .....                            | <b>58</b> |
| F.1             | Wiring diagram.....                                    | 58        |
| <b>G</b>        | <b>Commissioning Checklist</b> .....                   | <b>60</b> |
| <b>H</b>        | <b>Commissioning Flow Chart</b> .....                  | <b>64</b> |
| <b>I</b>        | <b>Initial start-up checklist</b> .....                | <b>65</b> |
| I.1             | Initial start-up checklist .....                       | 65        |
| <b>J</b>        | <b>Treating the heating water</b> .....                | <b>67</b> |
| <b>Index</b>    | <b>.....</b>                                           | <b>69</b> |



# 1 Safety

## 1.1 Intended use

The product is intended as a heat generator for sealed heating installations and for domestic hot water generation.

The product must only be installed in installations that have system separation (plate heat exchanger).

Improper use of any kind is prohibited.

Intended use also includes the following:

- Installing and operating the product only in conjunction with accessories for the air/flue pipe which are listed in the other applicable documents and comply with the type of unit
- Using the product while observing the accompanying operating, installation and maintenance instructions for the product along with all other components of the installation
- Installing and setting up the product while observing the product and system approval
- Observing all inspection and maintenance conditions listed in the instructions
- Installing while observing the IP code

The following is classed as improper use:

- Using the product in vehicles, such as mobile homes or caravans. Units that are not classed as vehicles are those that are installed in a fixed and permanent location (known as "fixed installation").
- Any use other than those described in these instructions and any use that goes beyond what is described here

## 1.2 Qualification

The person carrying out the work described here must have completed professional training. The competent person must demonstrably have all of the knowledge, skills and capabilities that are required in order to carry out the work mentioned below.

The following work must only be carried out by competent persons who are sufficiently qualified to do so:

- Set-up
- Dismantling

- Installation
- Start-up
- Inspection and maintenance
- Repair
- Decommissioning

- ▶ Proceed in accordance with current technology.
- ▶ Use the correct tool.

The above-mentioned work must always only be carried out by persons with sufficient qualifications.

This product can be used by children aged from 8 years and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the product in a safe way and understand the hazards involved. Children must not play with the product. Cleaning and user maintenance work must not be carried out by children unless they are supervised.

## 1.3 General safety information

The following sections convey important safety information. It is essential to read and observe this information in order to prevent risk of death, risk of injury, material damage or environmental damage.

### 1.3.1 Gas

If you smell gas:

- ▶ Avoid rooms that smell of gas.
- ▶ If possible, open doors and windows fully and ensure adequate ventilation.
- ▶ Do not use naked flames (e.g. lighters, matches).
- ▶ Do not smoke.
- ▶ Do not use any electrical switches, mains plugs, doorbells, telephones or other communication systems in the building.
- ▶ Close the emergency control valve or the main isolator.
- ▶ If possible, close the gas stopcock on the product.
- ▶ Warn other occupants in the building by yelling or banging on doors or walls.
- ▶ Leave the building immediately and ensure that others do not enter the building.
- ▶ Alert the police and fire brigade, and inform the emergency service department of





the gas supply company as soon as you are outside the building.

### 1.3.2 Flue gas

Flue gases may cause poisoning, while hot flue gases may also cause burns. Flue gases must therefore never be allowed to escape uncontrollably.

What to do if you smell flue gas in the property:

- ▶ Open all accessible doors and windows fully to provide ventilation.
- ▶ Switch off the product.
- ▶ Check the flue gas routes in the product and the flue gas diversions.

To prevent flue gas exit:

- ▶ Only operate the product if the air/flue pipe has been completely installed.
- ▶ With the exception of short periods for testing purposes, only operate the product when the front casing is installed and closed.
- ▶ In order to operate the product, ensure that the condensate siphon is always full.
  - Water seal level for units with condensate siphon (third-party accessory):  
≥ 200 mm

To ensure that the seals are not damaged:

- ▶ Instead of grease, use only water or commercially available soft soap to aid installation.

### 1.3.3 Air supply

Unsuitable or insufficient combustion and room air may lead to material damage, but also to life-threatening situations.

- ▶ Use the data plate, to check the unit types (air/flue gas) for which the product is approved:
  - Unit type B = **open-flued** combustion air supply
  - Unit type C = **room-sealed** combustion air supply
- ▶ If the product has the approval for unit type B **and** you want to operate the product as open-flued, ensure that the air supply to the product's installation room is permanently unobstructed and sufficient in accordance with the relevant ventilation require-

ments. This also applies, in particular, for cupboard installations.

To prevent corrosion on the product and in the flue system:

- ▶ Ensure that the combustion air supply is free from sprays, solvents, chlorinated cleaning agents, paint, adhesives, ammonia compounds, dust or similar substances.
- ▶ Ensure that no chemical substances are stored at the installation site.
- ▶ If you are installing the product in hairdressing salons, painter's or joiner's workshops, cleaning businesses or similar locations, choose a separate installation room in which the room air is technically free of chemical substances.

### 1.3.4 Electricity

The power supply terminals L and N remain live.

To prevent electric shocks, proceed as follows before working on the product:

- ▶ Disconnect the product from the power supply by switching off all power supplies at all poles (electrical partition with a contact gap of at least 3 mm, e.g. fuse or circuit breaker) or remove the mains plug (if present).
- ▶ Secure against being switched back on again.
- ▶ Wait at least three minutes until the condensers have discharged.
- ▶ Check that there is no voltage.

### 1.3.5 Weight

To prevent injuries when transporting the product:

- ▶ Make sure that the product is transported by at least two people.

### 1.3.6 Explosive and flammable substances

To prevent explosions and fire:

- ▶ Do not use the product in rooms that contain explosive or flammable substances (such as petrol, paper or paint).

### 1.3.7 High temperatures

To prevent burns:



- ▶ Only carry out work on components once they have cooled down.

To prevent material damage that is caused by heat transfer:

- ▶ Only solder connectors if the connectors are not yet screwed to the service valves.

### 1.3.8 Heating water

Both unsuitable heating water and air in the heating water may cause material damage to the product and in the heat generator circuit.

- ▶ Check the quality of the heating water. (→ Page 30)
- ▶ If you use non-diffusion-tight plastic pipes in the heating installation, ensure that no air gets into the heat generator circuit.

### 1.3.9 Neutralisation device

To prevent contamination of the waste water:

- ▶ Check whether a neutralising unit must be installed in accordance with national regulations.
- ▶ Observe local regulations on neutralising condensate.

### 1.3.10 Frost

To prevent material damage:

- ▶ Do not install the product in rooms prone to frost.

### 1.3.11 Safety devices

- ▶ Install the necessary safety devices in the installation.

### 1.3.12 Risk of death from leaks if the product is installed below ground level

Liquid gas accumulates at floor level. If the product is installed below ground level, liquid gas may accumulate at floor level if there are any leaks. In this case, there is a risk of explosion.

- ▶ Make sure that liquid gas cannot escape from the product or the gas pipe under any circumstances.

### 1.3.13 Risk of material damage caused by leak detection sprays and fluids

Leak detection sprays and fluids block the filter for the mass flow sensor on the Venturi, thereby destroying the mass flow sensor.

- ▶ During repair work, do not apply any leak detection sprays or fluids to the covering cap on the filter for the Venturi.

### 1.3.14 Risk of death from escaping flue gas

If you operate the product with an empty condensate trap / siphon, then flue gas may escape into the room air.

- ▶ In order to operate the product, ensure that the condensate trap / siphon is always full.

**Condition:** Permitted B23 or B23P unit types with condensate siphon (third-party accessory)

- Water seal level:  $\geq 200$  mm

## 1.4 Regulations (directives, laws, standards)

- ▶ Observe the national regulations, standards, directives, ordinances and laws.

## 1.5 List of relevant standards for Great Britain and Ireland

- ▶ Observe the national regulations, standards, directives, ordinances and laws.



You can find a list of relevant standards at:  
<https://www.vaillant.co.uk/standards>



## Guarantee Registration

Thank you for installing a new Vaillant appliance in your home.  
Vaillant appliances are manufactured to the very highest standard so we are pleased to offer our customers a comprehensive guarantee.

To maintain your guarantee, the boiler must be serviced annually by a competent person who holds the required qualifications in accordance with the rules in force of the country where the product is installed and in accordance with the manufacturer's recommendations.

We recommend you complete your guarantee registration as soon as possible.

### **Sales Support:**

Telephone: 0345 602 0262

### **Technical Enquiries:**

Telephone: 0344 693 3133

Email: [technical@vaillant.co.uk](mailto:technical@vaillant.co.uk)

### **General Enquiries:**

Telephone: 0345 602 2922

### **Training Enquiries:**

Telephone: 0345 601 8885

Email: [training.enquiriesuk@vaillant-group.com](mailto:training.enquiriesuk@vaillant-group.com)

### **Spares Enquiries:**

Telephone: 01773 596 615

### **To register your Vaillant appliance visit:**

<https://self-service.vaillant.co.uk/warranty-registration>



Vaillant is a licensed member of the Benchmark Scheme. Benchmark places responsibilities on both manufacturers and installers. The purpose is to ensure that customers are provided with the correct equipment for their needs, that it is installed, commissioned and serviced in accordance with the manufacturer's instructions by a competent person approved at the time by the Health and Safety Executive and that it meets the requirements of the appropriate Building Regulations. The Benchmark Checklist can be used to demonstrate compliance with Building Regulations and should be provided to the customer for future reference.

Installers are required to carry out installation, commissioning and servicing work in accordance with the Benchmark Code of Practice which is available from the Heating and Hotwater Industry Council who manage and promote the Scheme. Benchmark is managed and promoted by the Heating and Hotwater Industry Council.



### 3 Technical data

#### Technical data – General

|                                                                                                                                             | VU GB 806/5-5 (H-GB)<br>ecoTEC plus 806    | VU GB 1006/5-5 (H-GB)<br>ecoTEC plus 1006  | VU GB 1206/5-5 (H-GB)<br>ecoTEC plus 1206  |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|
| Designated country (designation in accordance with ISO 3166)                                                                                | GB (Great Britain), IE (Ireland)           | GB (Great Britain), IE (Ireland)           | GB (Great Britain), IE (Ireland)           |
| Approval category                                                                                                                           | II <sub>2H3P</sub>                         | II <sub>2H3P</sub>                         | II <sub>2H3P</sub>                         |
| Gas connection, boiler side                                                                                                                 | R 1                                        | R 1                                        | R 1                                        |
| Flow/return heating connections, boiler side                                                                                                | G 1 1/4"                                   | G 1 1/4"                                   | G 1 1/4"                                   |
| G20 natural gas flow pressure                                                                                                               | 2.0 kPa<br>(20.0 mbar)                     | 2.0 kPa<br>(20.0 mbar)                     | 2.0 kPa<br>(20.0 mbar)                     |
| Gas flow rate at 15 °C and 1013 mbar (based on domestic hot water generation if applicable), G20 (H <sub>i</sub> = 9.5 kWh/m <sup>3</sup> ) | 8.0 m <sup>3</sup> /h                      | 10.1 m <sup>3</sup> /h                     | 12.1 m <sup>3</sup> /h                     |
| Min. flue gas mass flow rate (G20)                                                                                                          | 6.9 g/s<br>(24.84 kg/h)                    | 8.9 g/s<br>(32.04 kg/h)                    | 10.6 g/s<br>(38.16 kg/h)                   |
| Max. flue gas mass flow rate                                                                                                                | 34.4 g/s<br>(123.84 kg/h)                  | 43.6 g/s<br>(156.96 kg/h)                  | 52.5 g/s<br>(189.00 kg/h)                  |
| Min. flue gas temperature                                                                                                                   | 40 °C                                      | 40 °C                                      | 40 °C                                      |
| Max. flue gas temperature                                                                                                                   | 85 °C                                      | 85 °C                                      | 85 °C                                      |
| Approved flue connections                                                                                                                   | C13, C33, C43, C53,<br>C93, B23, B53, B53P | C13, C33, C43, C53,<br>C93, B23, B53, B53P | C13, C33, C43, C53,<br>C93, B23, B53, B53P |
| Additional unit types                                                                                                                       | B23p                                       | B23p                                       | B23p                                       |
| Permissible pressure difference in the flue pipe for installation type B23P as a single-flue configuration max.                             | 150 Pa<br>(0.00150 bar)                    | 200 Pa<br>(0.00200 bar)                    | 200 Pa<br>(0.00200 bar)                    |
| Permitted pressure difference in the flue pipe for installation type B23P as cascade operation max.                                         | 50 Pa<br>(0.00050 bar)                     | 50 Pa<br>(0.00050 bar)                     | 50 Pa<br>(0.00050 bar)                     |
| Air/flue gas connection                                                                                                                     | 110/160 mm                                 | 110/160 mm                                 | 110/160 mm                                 |
| NOx class                                                                                                                                   | 6                                          | 6                                          | 6                                          |
| NOx emission weighted in accordance with EN 15502                                                                                           | ≤ 40 mg/kWh                                | ≤ 40 mg/kWh                                | ≤ 40 mg/kWh                                |
| Unit dimensions, width                                                                                                                      | 480 mm                                     | 480 mm                                     | 480 mm                                     |
| Unit dimensions, height                                                                                                                     | 960 mm                                     | 960 mm                                     | 960 mm                                     |
| Unit dimensions, depth                                                                                                                      | 603 mm                                     | 603 mm                                     | 603 mm                                     |
| Approx. net weight without pump group                                                                                                       | 68 kg                                      | 86 kg                                      | 90 kg                                      |

#### Technical data – Output

|                                                                                                                  | VU GB 806/5-5 (H-GB)<br>ecoTEC plus 806 | VU GB 1006/5-5 (H-GB)<br>ecoTEC plus 1006 | VU GB 1206/5-5 (H-GB)<br>ecoTEC plus 1206 |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------|-------------------------------------------|
| Nominal heat output range at 50/30 °C                                                                            | 16.5 to 82.3 kW                         | 20.7 to 102.8 kW                          | 24.7 to 123.4 kW                          |
| Nominal heat output range at 60/40 °C                                                                            | 16.0 to 80.0 kW                         | 20.0 to 100.0 kW                          | 24.0 to 120.0 kW                          |
| Nominal heat output range at 80/60 °C                                                                            | 14.9 to 74.7 kW                         | 18.7 to 93.3 kW                           | 22.4 to 112.0 kW                          |
| Nominal efficiency (stationary) at 50/30 °C                                                                      | 108%                                    | 108%                                      | 108%                                      |
| Nominal efficiency (stationary) at 60/40 °C                                                                      | 105%                                    | 105%                                      | 105%                                      |
| Nominal efficiency (stationary) at 80/60 °C                                                                      | 98%                                     | 98%                                       | 98%                                       |
| 30% efficiency                                                                                                   | 109 %                                   | 109 %                                     | 109 %                                     |
| Maximum heat input in heating mode (in relation to the net calorific value H <sub>i</sub> and pure heating mode) | 76.2 kW                                 | 95.2 kW                                   | 114.3 kW                                  |
| Maximum heat input during cylinder charging                                                                      | 76.2 kW                                 | 95.2 kW                                   | 114.3 kW                                  |
| Minimum heat input (in relation to the net calorific value H <sub>i</sub> and pure heating mode)                 | 15.2 kW                                 | 19.2 kW                                   | 22.9 kW                                   |



## Technical data – Heating

|                                                                                          | <b>VU GB 806/5-5 (H-GB)<br/>ecoTEC plus 806</b> | <b>VU GB 1006/5-5 (H-GB)<br/>ecoTEC plus 1006</b> | <b>VU GB 1206/5-5 (H-GB)<br/>ecoTEC plus 1206</b> |
|------------------------------------------------------------------------------------------|-------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| <b>Maximum flow temperature (default setting: 75 °C)</b>                                 | 85 °C                                           | 85 °C                                             | 85 °C                                             |
| <b>Max. flow temperature adjustment range (factory setting: 80 °C)</b>                   | 30 to 85 °C                                     | 30 to 85 °C                                       | 30 to 85 °C                                       |
| <b>Max. permissible operating pressure</b>                                               | 0.55 MPa (5.5 bar)                              | 0.55 MPa (5.5 bar)                                | 0.55 MPa (5.5 bar)                                |
| <b>Circulation water volume (with reference to <math>\Delta T = 23 \text{ K}</math>)</b> | 2,990 l/h                                       | 3,740 l/h                                         | 4,485 l/h                                         |
| <b>Approx. condensate quantity (pH value 3.5 to 4.0) in heating mode 40/30 °C</b>        | 12.8 l/h                                        | 16.0 l/h                                          | 19.2 l/h                                          |
| <b>Remaining feed head of the high-efficiency pump</b>                                   | 0.065 MPa<br>(0.650 bar)                        | 0.053 MPa<br>(0.530 bar)                          | 0.042 MPa<br>(0.420 bar)                          |

## Technical data – Electrical

|                                             | <b>VU GB 806/5-5 (H-GB)<br/>ecoTEC plus 806</b> | <b>VU GB 1006/5-5 (H-GB)<br/>ecoTEC plus 1006</b> | <b>VU GB 1206/5-5 (H-GB)<br/>ecoTEC plus 1206</b> |
|---------------------------------------------|-------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| <b>Mains voltage</b>                        | 230 V~                                          | 230 V~                                            | 230 V~                                            |
| <b>Mains frequency</b>                      | 50 Hz                                           | 50 Hz                                             | 50 Hz                                             |
| <b>Built-in fuse (slow-blow)</b>            | 4 A                                             | 4 A                                               | 4 A                                               |
| <b>Min. electrical power consumption</b>    | 25 W                                            | 18 W                                              | 18 W                                              |
| <b>Max. electrical power consumption</b>    | 122 W                                           | 160 W                                             | 160 W                                             |
| <b>Standby electrical power consumption</b> | < 2 W                                           | < 2 W                                             | < 2 W                                             |
| <b>IP rating</b>                            | IPX4D                                           | IPX4D                                             | IPX4D                                             |
| <b>Test symbol/registration no.</b>         | CE-0085CM0415                                   | CE-0085CM0415                                     | CE-0085CM0415                                     |

## 4 Notes on the documentation

- ▶ Always observe all operating instructions enclosed with the installation components.
- ▶ Store these instructions and all other applicable documents for further use.

These instructions apply only to:

### Product article number

|                                           | Article number | Gas Council Number |
|-------------------------------------------|----------------|--------------------|
| VU GB 806/5-5 (H-GB)<br>ecoTEC plus 806   | 0010010767     | 41-044-68          |
| VU GB 1006/5-5 (H-GB)<br>ecoTEC plus 1006 | 0010010780     | 41-044-69          |
| VU GB 1206/5-5 (H-GB)<br>ecoTEC plus 1206 | 0010010791     | 41-044-70          |

## 5 Product description

### 5.1 CE marking



The CE marking shows that the products comply with the basic requirements of the applicable directives as stated on the declaration of conformity.

The declaration of conformity can be viewed at the manufacturer's site.

### 5.2 Energy Saving Trust Endorsed Products



Only the most energy efficient products can carry the 'Energy Saving Trust Endorsed Product' landmark making it easy for consumers to choose products that have met strict energy performance criteria.

Available for: Boilers, Heating controls and chemical inhibitors, the Energy Saving Trust endorsed product landmark gives consumers confidence that a product will cost less to run, help lower energy bills and reduce carbon emissions.

#### About the Energy Saving Trust

Energy Saving Trust is an independent and impartial organisation that provides trusted energy saving advice to empower millions of people to lead affordable, low energy lifestyles. For more information visit [energysavingtrust.org.uk](http://energysavingtrust.org.uk)

### 5.3 Hot Water Association

Vaillant is a full member of the Hot Water Association and promotes the scheme in association with its cylinder range. Details are available on the web site [www.vaillant.co.uk](http://www.vaillant.co.uk)



The HWA Charter's Code of Practice requires that all members adhere to the following:

- To supply fit for purpose products clearly and honestly described
- To supply products that meet, or exceed appropriate standards and building and water regulations
- To provide pre and post sales technical support
- To provide clear and concise warranty details to customers

### 5.4 Information on the data plate

The data plate is mounted on the underside of the product at the factory.

| Information on the data plate   | Meaning                                                         |
|---------------------------------|-----------------------------------------------------------------|
| Serial number                   | for identification; 7th to 16th digits = product article number |
| VU...                           | Vaillant gas-fired wall-hung boiler for heating                 |
| ecoTEC plus                     | Product designation                                             |
| H, G20 – 20 mbar (2.0 kPa)      | Gas group and gas connection pressure as set at the factory     |
| Cat. (e.g. II <sub>2H3P</sub> ) | Unit category                                                   |
| Types (e.g. C <sub>33</sub> )   | Gas boiler type                                                 |
| PMS (e.g. 5.5 bar (0.55 MPa))   | Permissible total excess pressure                               |
| T <sub>max.</sub> (e.g. 85 °C)  | Max. flow temperature                                           |
| 230 V 50 Hz                     | Electrical connection                                           |
| (e.g. 260) W                    | Max. electrical power consumption                               |
| IP (e.g. X4D)                   | IP rating                                                       |
|                                 | Heating mode                                                    |
| P                               | Nominal heat output range                                       |
| Q                               | Heat input range                                                |




#### Note

Make absolutely sure that the product is compatible with the gas group at the installation site.


## 5.5 Design of the product

### 5.5.1 Functional elements (806/5-5)

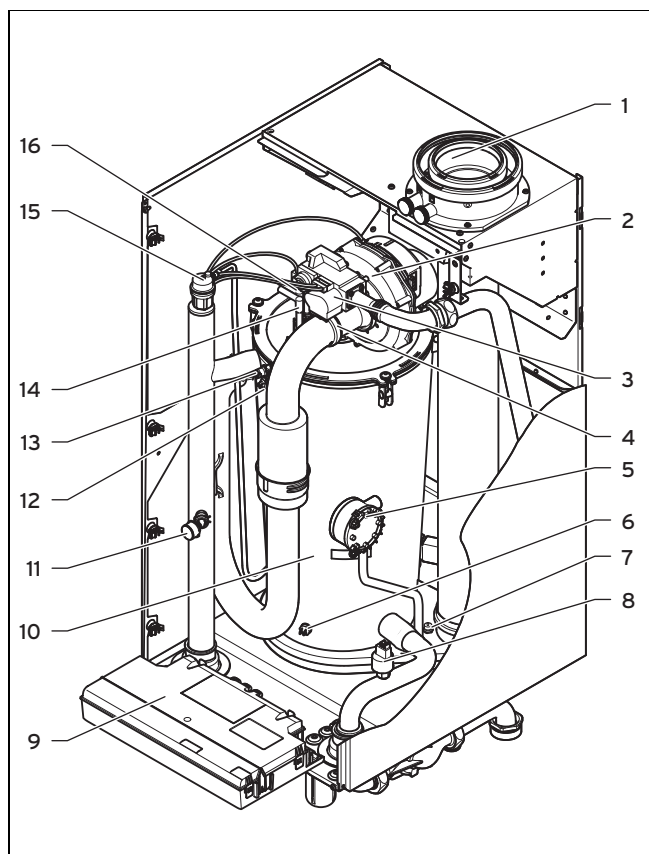

|   |                                  |    |                                    |
|---|----------------------------------|----|------------------------------------|
| 1 | Connection for the air/flue pipe | 9  | Electronics box                    |
| 2 | Fan                              | 10 | Integral condensing heat exchanger |
| 3 | Gas valve assembly               | 11 | Manometer                          |
| 4 | Connection for air intake pipe   | 12 | Flow temperature sensor            |
| 5 | Flue pressure switch             | 13 | Safety cut-out                     |
| 6 | Return temperature sensor        | 14 | Ignition electrode                 |
| 7 | Safety cut-out (flue gas)        | 15 | Automatic air vent                 |
| 8 | Water pressure sensor            | 16 | Monitoring electrode               |

### 5.5.2 Functional element (1006/5-5 and 1206/5-5)

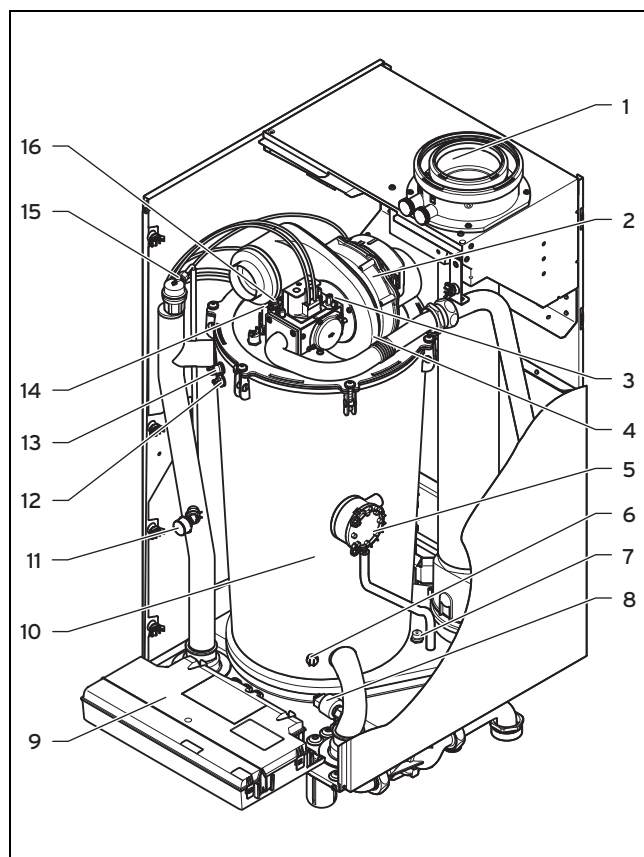

|   |                                  |    |                                    |
|---|----------------------------------|----|------------------------------------|
| 1 | Connection for the air/flue pipe | 9  | Electronics box                    |
| 2 | Fan                              | 10 | Integral condensing heat exchanger |
| 3 | Gas valve assembly               | 11 | Manometer                          |
| 4 | Supply air connector             | 12 | Flow temperature sensor            |
| 5 | Flue pressure switch             | 13 | Safety cut-out                     |
| 6 | Return temperature sensor        | 14 | Ignition electrode                 |
| 7 | Safety cut-out (flue gas)        | 15 | Automatic air vent                 |
| 8 | Water pressure sensor            | 16 | Monitoring electrode               |

## 5.6 Safety Devices

### 5.6.1 Electrical Supply Failure

The boiler will not work without an electrical supply. Normal operation of the boiler should resume when the electrical supply is restored.

Reset any external controls, to resume normal operation of the central heating.

If the boiler does not resume normal operation press the reset button. If the boiler does not resume normal operation after this call your Installation/Service company or Vaillant service.

### 5.6.2 Overheating Safety

The boiler software is designed to recognise the potential for an overheat lockout and will shutdown before this happens. To restart the boiler, press the reset button on the boiler interface.

If the boiler fails to resume normal operation and all external controls are calling for heat, then call your Installation/Service company or Vaillant service.

### **5.6.3 Frost protection**

The appliance has a built in frost protection device that protects the boiler from freezing. With the gas and electric supplies ON and irrespective of any room thermostat setting, the frost protection device will operate the pump when the temperature of the boiler water falls below 12 °C.

A timer is used so that the temperature can be checked periodically. After 10 minutes the pump will be stopped if the temperature is higher than 10 °C or has already reached 35 °C. The burner will activate if the boiler temperature does not reach 10 °C after 30 minutes or at any time if the temperature drops to 5 °C.

The burner will switch off when the temperature reaches 35 °C.

### **5.6.4 Condensate Drain Blockage**

As a safety feature the boiler will stop working if the condensate drain becomes blocked. During freezing conditions this may be due to the forming of ice in the condensate drain external to the house. Release an ice blockage by the use of warm cloths on the pipe. After pressing reset the boiler should restart.

## 6 Set-up

For fault-free operation and a long service life for the product, you must only install the product in installations with system separation (plate heat exchanger).


### 6.1 Checking the scope of delivery

- Check that the scope of delivery is complete and intact.

#### 6.1.1 Scope of delivery

| Number | Designation                               |
|--------|-------------------------------------------|
| 1      | Unit mounting bracket                     |
| 1      | Heat generator                            |
| 1      | Condensate trap                           |
| 1      | Condensate discharge hose                 |
| 1      | Mounting template                         |
| 1      | Enclosed documentation                    |
| 1      | Enclosed unit fastening                   |
| 1      | Bag with small parts                      |
| 1      | Gas connector                             |
| 1      | Service valve (1 1/2 inches), red handle  |
| 1      | Service valve (1 1/2 inches), blue handle |
| 1      | Bag with seals for service valves         |
| 1      | Expansion relief valve, 6 bar             |
| 1      | R 1 straight-through gas valve            |

## 6.2 Product dimensions and connection dimensions

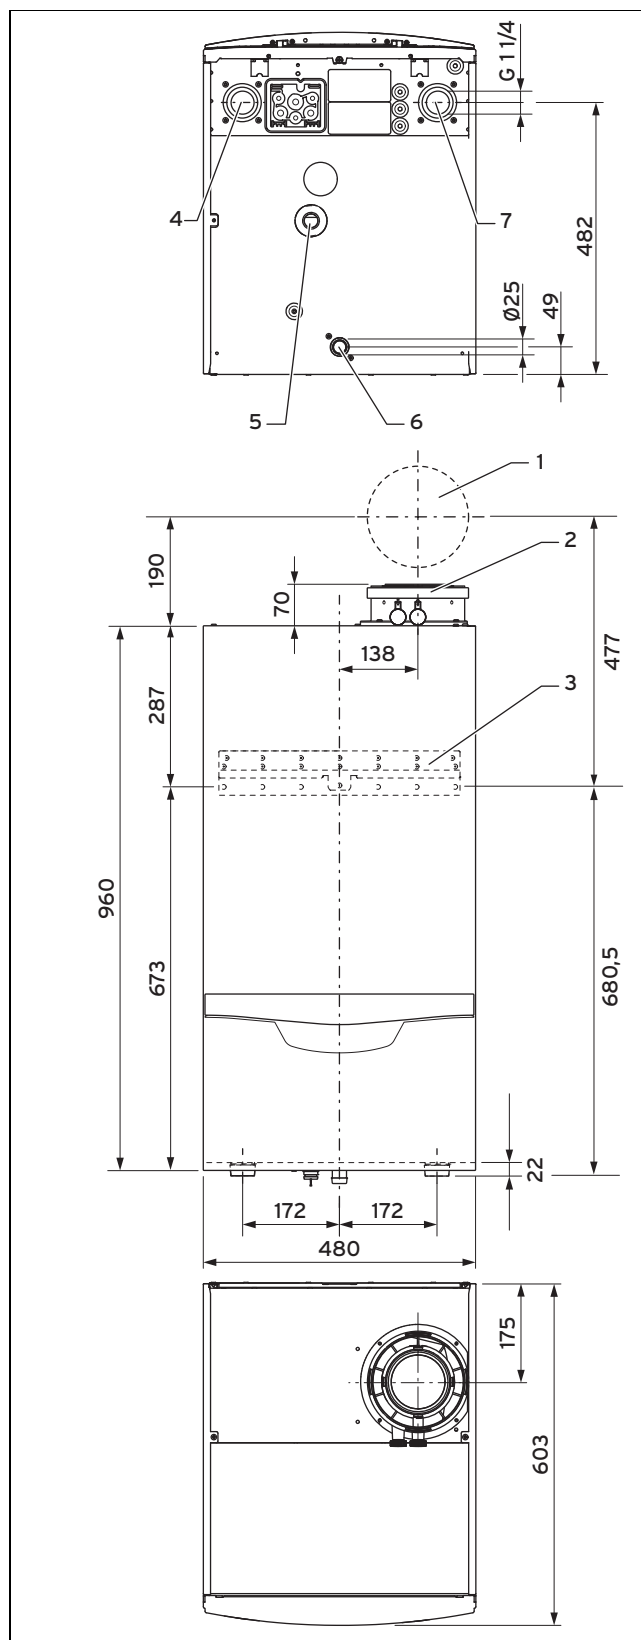


- |   |                         |   |                            |
|---|-------------------------|---|----------------------------|
| 1 | Wall duct for flue pipe | 5 | Condensate trap connection |
| 2 | Flue pipe connection    | 6 | Gas connection             |
| 3 | Hanging bracket         | 7 | Heating return             |
| 4 | Heating flow            |   |                            |

### 6.3 Installation site

This boiler is not suitable for outdoor installation. This boiler may be installed in any room. However if the boiler is being installed in a room containing a bath or shower it must only be installed in zones 2 or 3. In GB this is the current I.E.E. WIRING REGULATIONS and BUILDING REGULATIONS. In IE reference should be made to the current edition of I.S.813 "Domestic Gas Installations" and the current ETCI rules.

If the boiler is to be installed in a timber frame building it should be fitted in accordance with the current version of the Institute of Gas Engineers document IGE/UP/7. If in doubt seek advice from local building control.

### 6.4 Minimum clearances and installation clearances

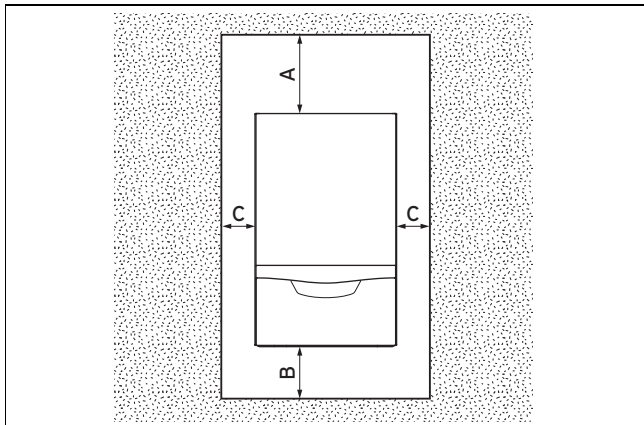

- |   |                                                                              |   |                                                                                     |
|---|------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|
| A | 350 mm (110/160 mm diameter flue pipe)<br>At least 450 mm for cascade design | C | Optional approx. 200 mm                                                             |
| B | 400 mm                                                                       | D | Clearance of 600 mm in front of the product for easy access during maintenance work |

- When using the accessories, observe the minimum clearances/installation clearances.



#### Note

A lateral clearance is not required, however you can also remove the side sections if there is sufficient space at the side (approx. 200 mm) in order to facilitate maintenance or repair work.

- Where units are installed in cascade, observe the gradient of the flue pipe (approx. 50 mm/m).

It is not necessary to maintain a clearance between the product and components made of combustible materials that go beyond the minimum clearances.

### 6.5 Compartment Ventilation

The boilers are very high efficiency appliances.

As a consequence the heat loss from the appliance casing during operation is very low.


Compartment ventilation is not required as the products are only certified, and can only be fitted with a concentric flue system.

### 6.6 Air/flue pipe

#### 6.6.1 Regulation

Different flue outlet configurations can be carried out.

- Consult the installation manual for air/flue gas systems for more information about the other possibilities and associated accessories.

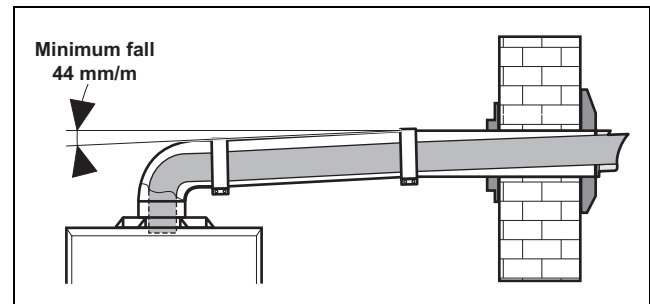

- Standard flue terminal kits have an in-built fall back to the boiler to drain the condensate. These can be fitted level between the appliance and the termination position. All other extended flues must have a fall of at least 44 mm/m.

The maximum length of the flue outlet is defined according to its type (for example C13).

- Whatever the kind of flue system chosen, observe the minimum distances to position the flue terminals.
- To install the flue, refer to the separate flue instruction supplied with your appliance.
- Explain these requirements to the user of the appliance.

In GB the minimum acceptable siting dimensions for the terminal from obstructions, other terminals and ventilation openings are shown in diagram overleaf.

In IE the minimum distances for flue terminal positioning must be those detailed in I.S. 813 "Domestic Gas Installations".

The terminal must be exposed to the external air, allowing free passage of air across it at all times.

Being a condensing boiler some pluming may occur from the flue outlet. This should be taken into consideration when selecting the position for the terminal.

## 6.6.2 Position of the air/flue terminal


The diagram is relevant for the installation of boilers with a gross heat input > 70 kW net but less than 333 kW net. For further information see the current IGEM UP/10 and the risk assessment appendix for guidance on suitable flue terminal locations.

For installations above 333 kW net input, refer to the “Clean Air Act,” as the discharge of flue products must comply with the stated and calculated distances above ground (see note 3).

It is essential to ensure that discharged flue products do not create any hazard or nuisance to persons within the discharge area and do not come into contact with building surfaces or build-up within an area where they may re-enter a building.

### Notes

1. No installations should discharge into a courtyard, light well, car port or enclosed environment.
2. Care should be taken to ensure that even if the installation complies with the minimum dimensions shown, that all site conditions are taken into consideration to avoid products re-entering the building, the plume becoming a nuisance or causing wall staining.
3. Above 333 kW net input the height and termination of flues will require approval from the local authority.

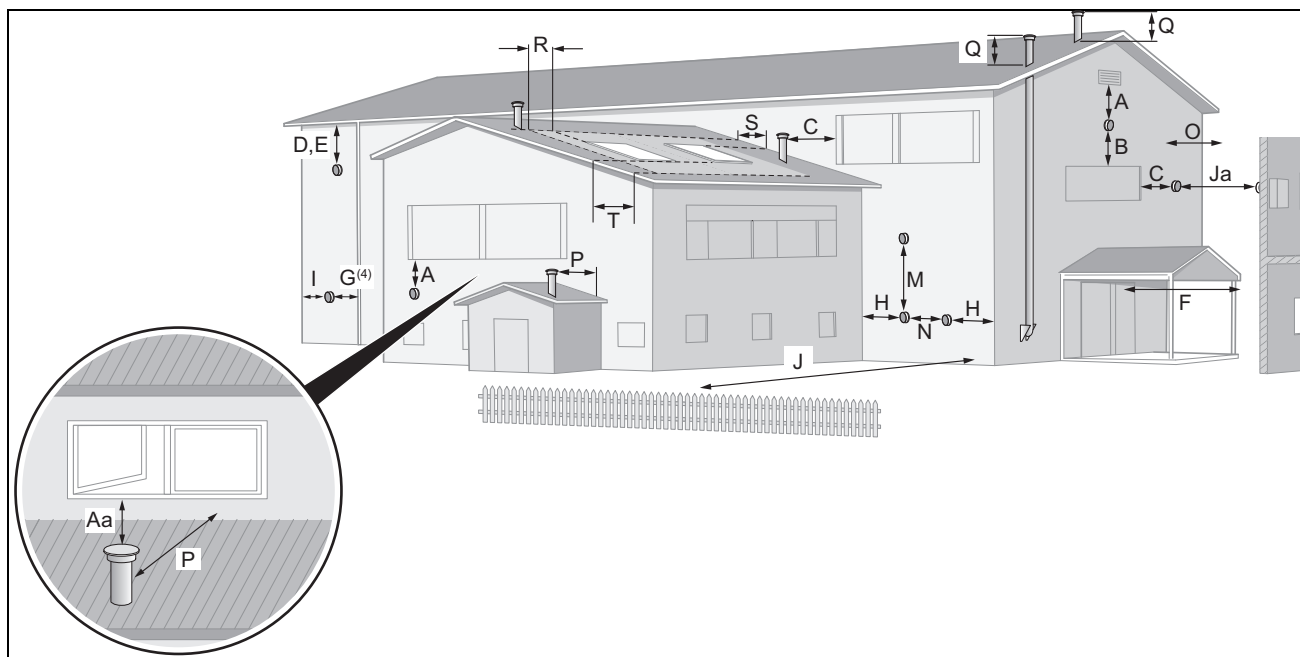

### 6.6.2.1 Positioning of the opening of a fan-supported flue system

| Minimum clearances for concentric terminations                             |                                                                                                                                                                                                                                                                                                      |    |                      |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----------------------|
| Key                                                                        | Horizontal → 70 kW up to 120 kW                                                                                                                                                                                                                                                                      | mm | All systems > 120 kW |
| *Products must disperse freely and not make contact with building surfaces |                                                                                                                                                                                                                                                                                                      |    |                      |
| 1.                                                                         | There should be no ventilation/opening in the eaves within 900 mm of the terminal.                                                                                                                                                                                                                   |    |                      |
| 2.                                                                         | These dimensions comply with the building regulations, but they may need to be increased to avoid wall staining and nuisance from pluming depending on site conditions.                                                                                                                              |    |                      |
| 3.                                                                         | It is recommended that an elbow termination is fitted to direct the plume away from the window.                                                                                                                                                                                                      |    |                      |
| 4.                                                                         | If the pipe is shielded from the heat, this dimension may be reduced to 25 mm.                                                                                                                                                                                                                       |    |                      |
| 5.                                                                         | The flue through the roof should not be located within the shaded areas – R, S and T.                                                                                                                                                                                                                |    |                      |
| 6.                                                                         | It is recommended that the terminal should not be located below 2 m in any occupied space.                                                                                                                                                                                                           |    |                      |
| 7.                                                                         | Terminals below 2 m must be fitted with a suitable terminal guard and should be a minimum of 300 mm above surface level.                                                                                                                                                                             |    |                      |
| 8.                                                                         | It is the installer's responsibility to carry out a suitable risk assessment to ensure the location of the terminal is safe and products can freely disperse without causing nuisance or harm to persons. Refer to IGEM/UP/10.                                                                       |    |                      |
| 9.                                                                         | All flue terminations must be positioned such that the flue products can discharge freely from the terminal for rapid dispersal and cannot enter or re-enter a building, whilst ensuring they do not come into contact with objects or building fabrics as these could be damaged by the condensate. |    |                      |


| Minimum clearances for concentric terminations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                  |       |                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Directly below an opening, air brick, opening windows            | 2,500 | Flue system to be designed and Installed according to IGEM UP/10.<br><br>Use the risk assessment at appendix 9.<br><br>Above 333 kW net heat input the clean air act must also be adhered to and system will need approval of local authority. |
| B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Above an opening, air brick, opening windows                     | 900   |                                                                                                                                                                                                                                                |
| C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Horizontally to an opening, air brick, opening windows           | 900   |                                                                                                                                                                                                                                                |
| D (1,4,9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Below metal gutter, drain/soil pipe (extending out to clear)     | 200*  |                                                                                                                                                                                                                                                |
| E (1,4,9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Below eaves, adjacent to drain pipes                             | 200   |                                                                                                                                                                                                                                                |
| F(6)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Below balcony or car port - must be extend to clear air          | 50    |                                                                                                                                                                                                                                                |
| G(4)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | From a vertical drain pipes and soil pipes (extend out to clear) | 50    |                                                                                                                                                                                                                                                |
| H(7,9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | From internal/external corner                                    | 300   |                                                                                                                                                                                                                                                |
| I(2,7)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | To a boundary alongside the terminal/external corner             | 300   |                                                                                                                                                                                                                                                |
| J (2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Facing a boundary or surface opposite                            | 2,200 |                                                                                                                                                                                                                                                |
| Ja(2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | From a terminal opposite facing the terminal                     | 3,000 |                                                                                                                                                                                                                                                |
| M (7)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Vertical from a terminal                                         | 1,500 |                                                                                                                                                                                                                                                |
| N (7)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Horizontally from a terminal                                     | 300   |                                                                                                                                                                                                                                                |
| O                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Rosette to face of wall (can be extended up to 500mm *)          | 0     |                                                                                                                                                                                                                                                |
| * Terminal and wall entry must be sealed to prevent water ingress.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                  |       |                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                  |       |                                                                                                                                                                                                                                                |
| Key                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Vertical flues → 70 kW up to 120 kW                              | mm    | All systems > 120 kW                                                                                                                                                                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                  |       |                                                                                                                                                                                                                                                |
| Aa (8,9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Within 2000mm horizontally of opening window.                    | 2,500 | Flue system to be designed and Installed according to IGEM UP/10. Above 333 kW net heat input the clean air act must also be adhered to and system will need approval of local authority.                                                      |
| C(2,3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | From adjacent non-opening window                                 | 1,000 |                                                                                                                                                                                                                                                |
| P (3,9)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | From structure or (taller) building without openings or windows  | 300*  |                                                                                                                                                                                                                                                |
| Q                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Above flat roof or intersection with pitched roof                | 600   |                                                                                                                                                                                                                                                |
| R(5)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Horizontal from opening windows on pitched or flat roofs         | 900   |                                                                                                                                                                                                                                                |
| S(5)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Above an opening roof light or windows on pitched roofs          | 600   |                                                                                                                                                                                                                                                |
| T(5)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Below an opening roof light or windows on pitched roofs          | 2,000 |                                                                                                                                                                                                                                                |
| *Products must disperse freely and not make contact with building surfaces                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                  |       |                                                                                                                                                                                                                                                |
| 1. There should be no ventilation/opening in the eaves within 900 mm of the terminal.<br>2. These dimensions comply with the building regulations, but they may need to be increased to avoid wall staining and nuisance from plumbing depending on site conditions.<br>3. It is recommended that an elbow termination is fitted to direct the plume away from the window.<br>4. If the pipe is shielded from the heat, this dimension may be reduced to 25 mm.<br>5. The flue through the roof should not be located within the shaded areas – R, S and T.<br>6. It is recommended that the terminal should not be located below 2 m in any occupied space.<br>7. Terminals below 2 m must be fitted with a suitable terminal guard and should be a minimum of 300 mm above surface level.<br>8. It is the installer’s responsibility to carry out a suitable risk assessment to ensure the location of the terminal is safe and products can freely disperse without causing nuisance or harm to persons. Refer to IGEM/UP/10.<br>9. All flue terminations must be positioned such that the flue products can discharge freely from the terminal for rapid dispersal and cannot enter or re-enter a building, whilst ensuring they do not come into contact with objects or building fabrics as these could be damaged by the condensate. |                                                                  |       |                                                                                                                                                                                                                                                |

### 6.6.2.2 Horizontal terminal positioning

Dimensions D, E, F and G:

These clearances may be reduced without affecting the performance of the boiler. In order to ensure that the condensate plume does not affect adjacent surfaces the terminal should be extended as shown below.



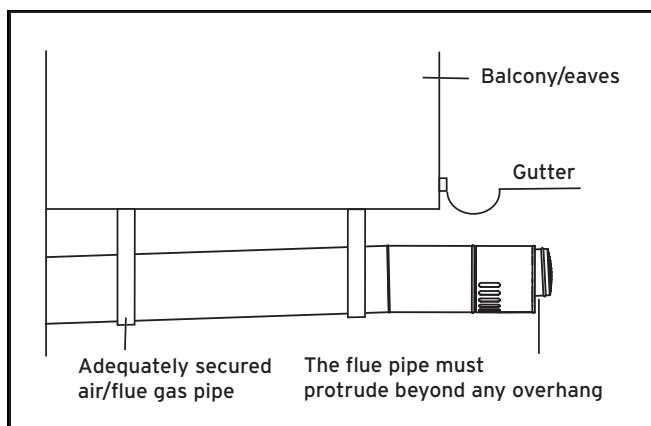


Horizontal Termination

## 6.7 Using the mounting template

1. Position the mounting template vertically over the installation site.
2. Secure the template to the wall.
3. Mark on the wall all the points required for your installation.
4. Remove the mounting template from the wall.
5. Drill all the holes required.
6. Make any breakthroughs necessary.

## 6.8 Wall-mounting the product


1. Check the load-bearing capacity of the wall.
2. Note the total weight of the product.
3. Only use fixing material that is permitted for the wall.
4. If required, ensure that mounting apparatus on-site has sufficient load-bearing capacity.

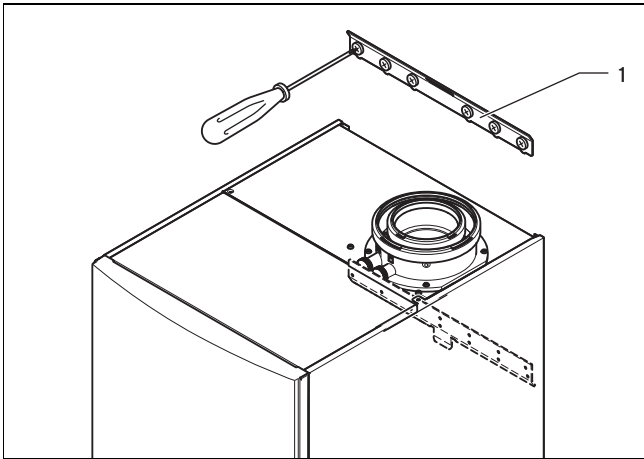

5. Install the unit mounting bracket (1) on the wall.
6. Suspend the product on the unit mounting bracket from above using the hanging bracket.

## 6.9 Removing/installing the front casing

### 6.9.1 Removing the front casing

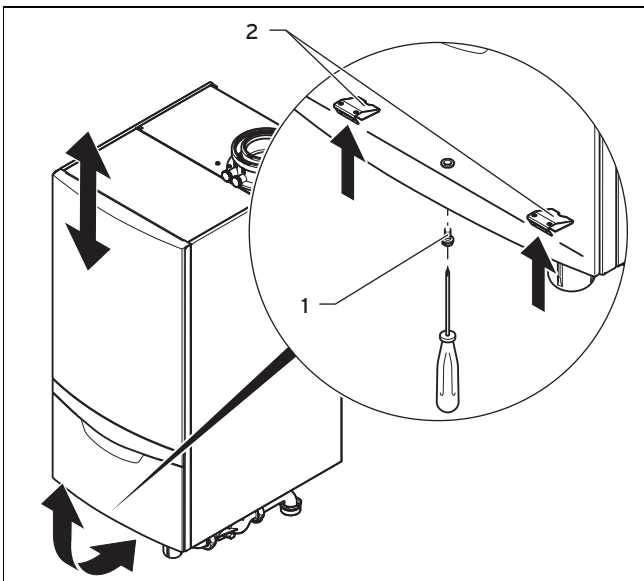


1. Undo the bolt (1).
2. Push in both retaining clips (2) so that the front casing is released.
3. Pull the front casing forwards at the bottom edge.
4. Lift the front casing upwards from the bracket.

### 6.9.2 Installing the front casing

1. Place the front casing on the upper brackets.
2. Push the front casing onto the product until both retaining clips (2) snap into place at the front casing.
3. Secure the front casing by tightening the screw (1).

## 6.10 Removing/installing the upper casing

### 6.10.1 Removing the upper casing

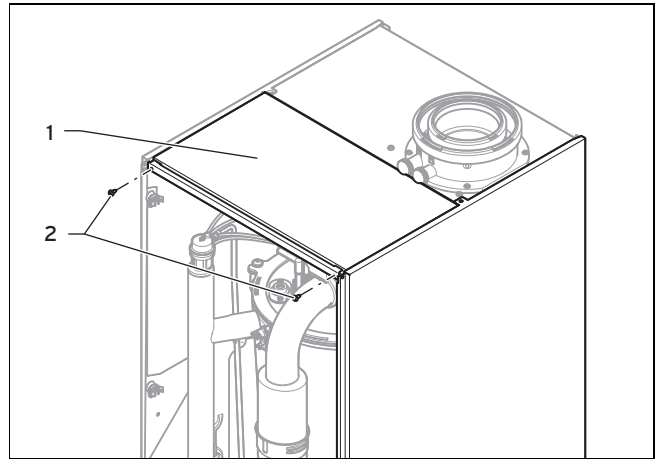


1. Unscrew the screws (2).
2. Pull out the upper casing (1) towards the front.

### 6.10.2 Installing the upper casing

1. From above, place the upper casing (1) on the product.
2. Use the screws (2) to secure the upper casing (1).

## 6.11 Removing/installing the side section (as required)

### 6.11.1 Removing the side section

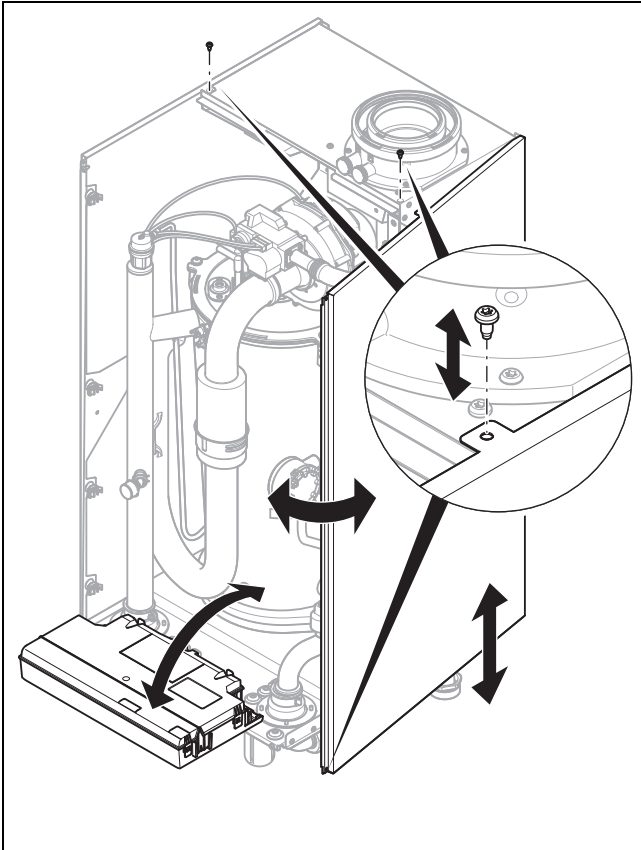

#### **Caution.**

**Risk of material damage caused by mechanical deformation.**

Removing **both** side sections may cause mechanical distortion in the product, which may cause damage to the piping, for example, and potentially result in leaks.

- Always only remove **one** side section – never both side sections at the same time.

1. Hinge the electronics box forwards.
2. Remove the upper casing. (→ Page 18)
3. Hold on to the side section so that it cannot fall, and unscrew the lower front and upper central screws from the side section.
4. Hinge the side section slightly to the side and pull it out towards the front.

### 6.11.2 Installing the side section

1. Push the side section into the bracket. When doing so, and to prevent leaks, ensure that all straps on the side section engage with the back panel.
2. Slide the side section to the rear.
3. Secure the side section using two screws in the front lower area and in the upper central area.
4. Install the upper casing. (→ Page 18)
5. Hinge the electronics box up.

## 7 Installation

### 7.1 Installation prerequisites

#### 7.1.1 Information about the gas group

In its as-supplied condition, the product is preset for operation with the gas group specified on the data plate.

#### 7.1.2 Purging the liquid gas tank

If the liquid gas tank is not purged properly, this may result in ignition problems.

- ▶ Ensure that the liquid gas tank has been purged properly before installing the product.
- ▶ If required, contact the filler or the liquid gas supplier.

#### 7.1.3 Using the correct gas group

Using the incorrect gas group may cause fault shutdowns in the product. Ignition and combustion noise may occur in the product.

- ▶ Only use the gas groups specified on the data plate.

### 7.2 Preparing for installation

1. Make sure that the existing gas meter is capable of passing the rate of gas supply required.
2. Consider the maximum heat output given in DHW mode.
3. Install the following components:
  - Drain cocks at the lowest points in the heating installation (→ current version of "BS 2879")
  - A stopcock on the cold water connection
  - A stopcock in the gas pipe
4. Install the connection pipes such that they are free from mechanical stress.
5. If you use non-diffusion-tight plastic pipes in the heating installation, ensure that no air gets into the heat generator circuit.
6. Only solder connectors if the connectors are not yet screwed to the service valves.
7. Only bend connection pipes if they have not yet been connected to the product.
8. Flush the heating installation thoroughly before installing the product.
9. Check the leak-tightness of the gas valve assembly using a pressure of  $\leq 7.5$  kPa (75 mbar).
10. Use seals that are made from a paste-like fibre material. Seals made of rubber-like materials may be subject to plastic deformation, which can lead to pressure losses.

### 7.3 Descaling the water

Scale deposition increases as the water temperature increases.

- ▶ Descale the water as required.

## 7.4 Gas installation

### 7.4.1 Performing the gas installation



#### Caution.

**Risk of material damage caused by incorrect gas installation.**

Excessive test pressure may cause damage to the gas valve.

- ▶ When checking the entire gas installation for leak-tightness, the maximum permissible pressure at the gas valve is 7.5 kPa (75 mbar).




#### Caution.

**Risk of material damage caused by the incorrect gas group.**

Using the wrong gas group may cause a fault shutdown of the product. Furthermore, ignition and combustion noise may occur in the product.

- ▶ Only use the gas group in accordance with the data plate.

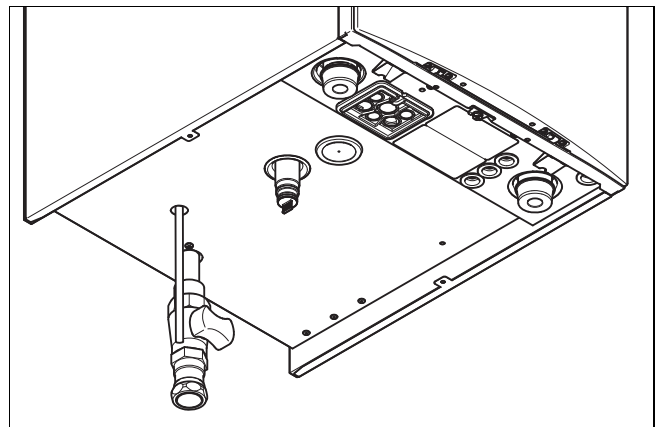

- ▶ Make sure that the existing gas meter is capable of passing the rate of gas supply required.
- ▶ Remove the residues from the gas pipe by blowing through the gas pipe beforehand.
- ▶ Install an approved gas stopcock on the product using the gas connector.
- ▶ Install the gas pipe on the gas stopcock such that it is free from mechanical stress.
- ▶ Purge the gas pipe before start-up.

### 7.4.2 Checking the gas line for leak-tightness

- ▶ Check the entire gas line properly for leak-tightness.

## 7.5 Hydraulics installation



### Caution.

#### Risk of material damage due to high temperatures.

Plastic pipes in the heating installation may become damaged by overheating if a fault occurs.

- ▶ When using plastic pipes, install a limit thermostat on the heating flow.

- ▶ Please note that water above 150 mg/l  $\text{CaCO}_3$  is classified as hard and the corresponding treatment is required (→ Page 30).

The product should be connected using a Vaillant pump group (accessories).

- High-efficiency pump


This pump group has a connection option for an expansion vessel (right-hand connection) and an expansion relief valve (left-hand connection). You can find information about available accessories from the Vaillant price list or by contacting the contact address provided on the back page of these instructions.

- ▶ When installing the pump group, observe the installation sequence for the insulation and the hydraulic pipes (Pump group installation instructions).
- ▶ Note that the unit pump must always be fitted in the return line. Otherwise, this may lead to a malfunction in the product.

When connecting several products in cascade operation, you must install a non-return flap from the cascade connection set in the flow line of each individual product.

A non-return flap from a third-party manufacturer must have no more than 30 mbar pressure loss for a volume flow of 4.5 m<sup>3</sup>/h.


### 7.5.1 Connecting the heating flow and heating return

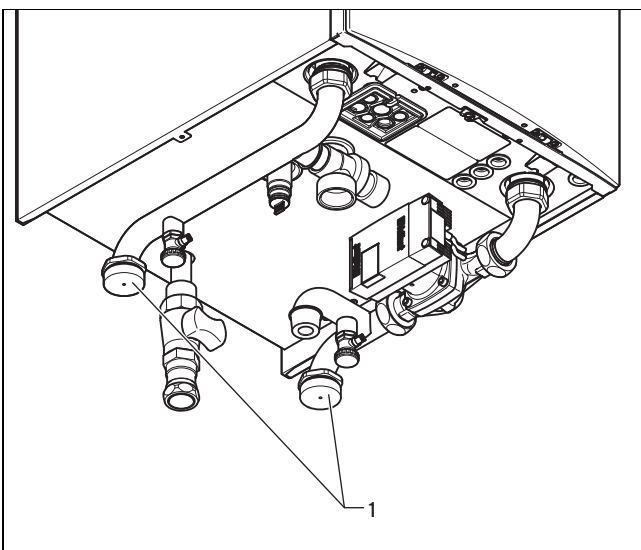

1. In each case, insert a flat seal into the service valve (Vaillant accessories).
2. Screw the service valves onto the flow and return connection (1) of the pump group.


3. Screw the service valves to the on-site installation.
  - Diameter of the heating line: 1 1/4"

### 7.5.2 Installing the expansion vessels

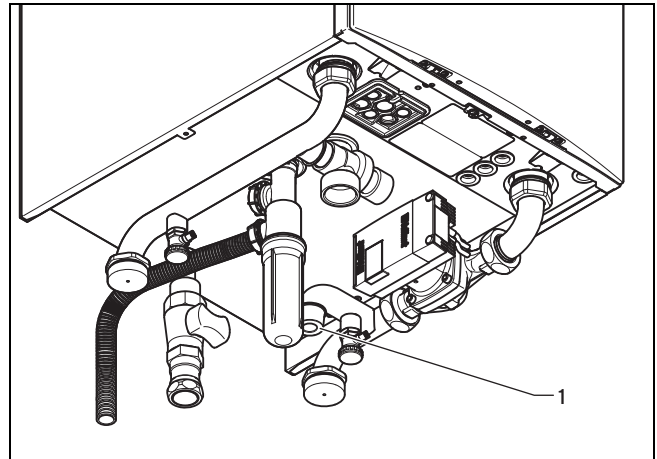

1. Install a sufficiently dimensioned expansion vessel at the connection in the boiler circuit return (1) and in the installation circuit.
  - Connection to the pump group: 1/2"
  - Large expansion vessel: ≥ 10 l
2. Check that the volumetric capacity of the expansion vessel in the installation circuit is sufficient for the system volume.

### 7.5.3 Hydraulic connection

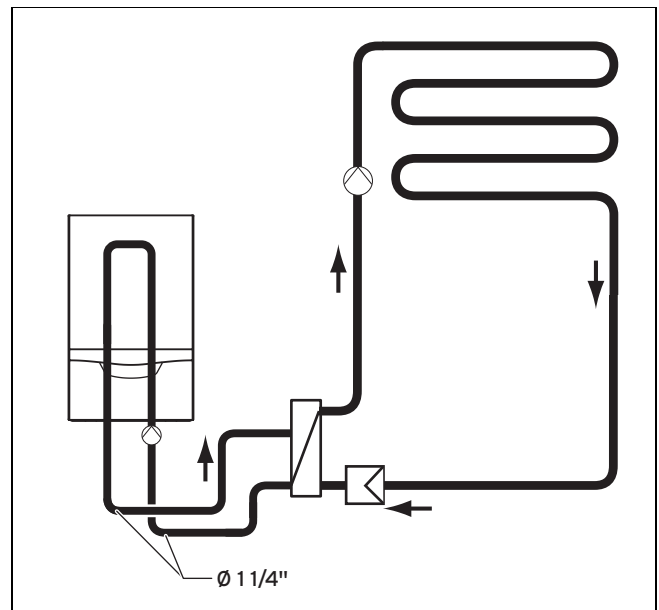

The manufacturer recommends installing the following components in addition to the specified plate heat exchanger for the hydraulic system separation:

- A dirt filter installed on the installation side upstream of the plate heat exchanger
- Heating-side cleaning connections for backwashing the plate heat exchanger during maintenance work

To this end, various plate heat exchangers are available as accessories, depending on the output of a product or whether it is a cascade system. The pressure loss is adjusted to the pump groups that are offered as an accessory. The minimum circulation water volume in the unit circuit is only guaranteed if you use original accessories in the unit circuit, provided that the maximum pressure losses in

the piping are not exceeded. The manufacturer therefore urgently recommends that you only install original pump groups.

Select the plate heat exchanger according to output.

Depending on the unit output, different remaining feed heads (→ Page 36) are available at the boiler circuit's flow pipe.

Observe the following pressure losses (nominal volume flow at  $\Delta T=20\text{ K}$ ):

| Power                                     | Pressure loss          |
|-------------------------------------------|------------------------|
| < 120 kW                                  | 86 mbar<br>(0.086 bar) |
| In conjunction with the hydraulic cascade |                        |
| < 240 kW                                  | 96 mbar<br>(0.096 bar) |
| < 360 kW                                  | 76 mbar<br>(0.076 bar) |
| < 480 kW                                  | 82 mbar<br>(0.082 bar) |
| < 600 kW                                  | 87 mbar<br>(0.087 bar) |
| < 720 kW                                  | 92 mbar<br>(0.092 bar) |


#### 7.5.4 Connecting the expansion relief valve



##### Note

The product is delivered with a 6 bar expansion relief valve, which must be installed on the product and must be guided to a secure, but visible, point. The drain pipe on the expansion relief valve must have a minimum diameter of 28 mm and must only be used for this purpose.

1. Ensure that all components that are installed in the heating installation are suitable for a max. operating pressure of 6 bar.

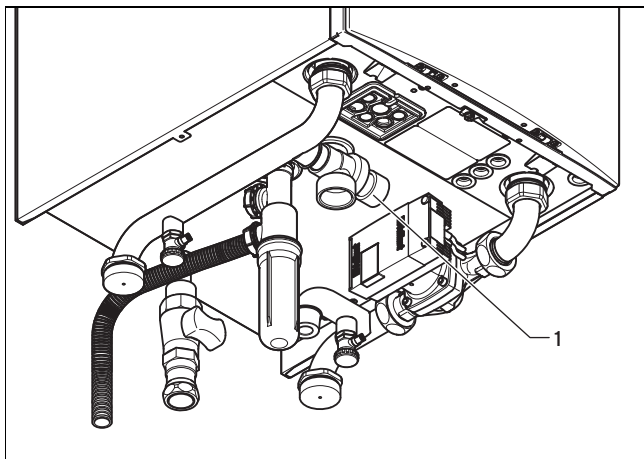

##### Danger! Risk of scalding!

Heating water that leaks from the exit point of the expansion relief valve may cause severe scalds.

- Install the expansion relief valve drain to a professional standard.

2. Connect the expansion relief valve (1).



##### Note

When selecting the expansion relief valve, note the max. operating pressure of the heating installation.

#### 7.5.5 Connecting the condensate trap

Condensate forms in the product during combustion. The condensate drain pipework routes the condensate to the waste water connection.

The product is equipped with a condensate trap. The filling height is 145 mm. The condensate trap collects any condensate that forms and feeds it into the condensate discharge pipe.

- Place the condensate trap on the underside of the product on the condensate drain pipe and secure it using the retaining clips.
- Leave installation space of at least 180 mm below the condensate trap so that you can clean the condensate trap in the event of maintenance work.
- Before you start up the product, fill the condensate trap with water (→ Page 31).
- Check the connection point for leak-tightness (→ Page 35).

#### 7.5.6 Connecting the condensate discharge pipe




##### Danger!

##### Risk of death from escaping flue gases!

The condensate discharge pipe must not be tightly connected to waste-water pipework because, otherwise, the internal condensate trap may be drained fully and flue gas may escape.

- Do not connect the condensate discharge pipe tightly to the waste-water pipework.

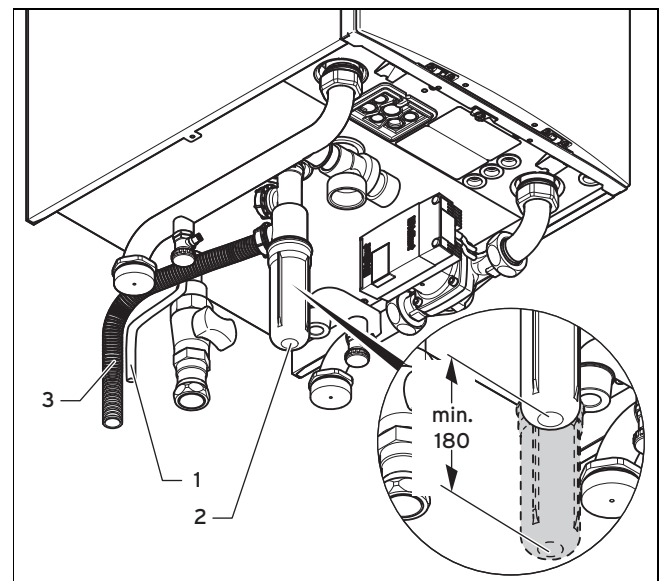

- Connect the condensate discharge (3) on the condensate trap (2) to a condensate discharge pipe that has a minimum internal diameter of 19 mm (30 mm internal diameter for all external pipes that are fed out of the building) and

is made from an acid-resistant material (e.g. plastic overflow pipe).

- The condensate discharge pipework must have a continuous fall (45 mm per metre) and should whenever possible terminate at a suitable discharge point within the heated envelope of the building that will remain frost free under long periods of low external temperatures.



#### Note

Ensure that the connection between the condensate discharge pipe and the drain hose is not air-tight.

- ▶ If required, guide the drain hose (1) from the automatic air vent into the tundish.
- ▶ When making the condensate pipe connections ensure that there is adequate branch ventilation and that there can be no backflow of water into the boiler via the condensate pipe work.
- ▶ Check whether a neutralising unit must be installed in accordance with national regulations.
- ▶ Observe the local regulations on neutralising the condensate.




#### Note

You can obtain neutralisation with or without a condensate pump as an accessory.

- ▶ During installation remove all burrs from inside of cut pipe work and avoid excessive adhesive which may trap small pockets of water close to the pipe wall which can freeze and build into a larger ice plug.
- ▶ As with other pipe work insulate the condensate discharge pipe to minimise any risk of freezing and beware when crossing cavities that the fall is maintained and the pipe sleeved.


### 7.5.6.1 Overview of the condensate discharge systems

#### 7.5.6.1.1 Direct Connection to internal soil and vent stack

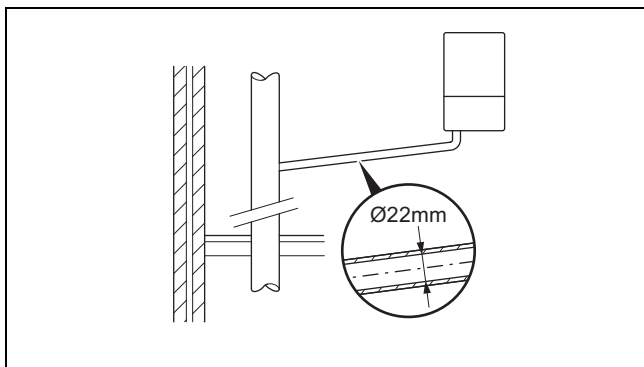


Preferred option

#### 7.5.6.1.2 Direct connection to external soil and vent stack

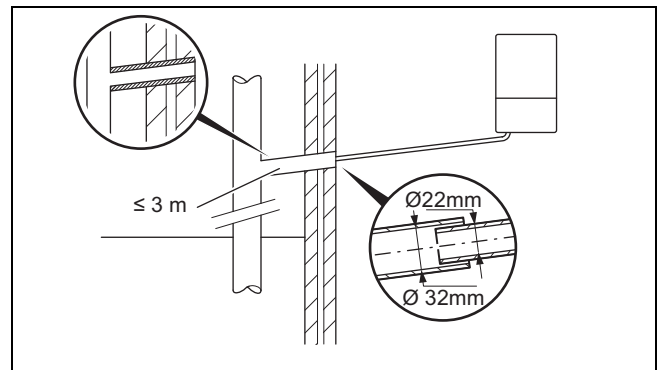


#### 7.5.6.1.3 External termination to gulley or hopper

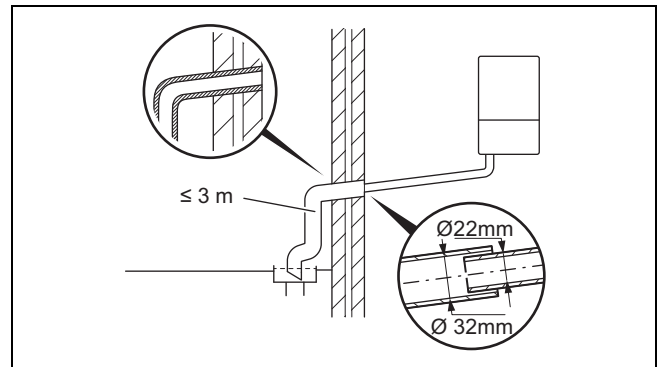

Best practice


#### 7.5.6.1.4 Internal termination into combined sink waste

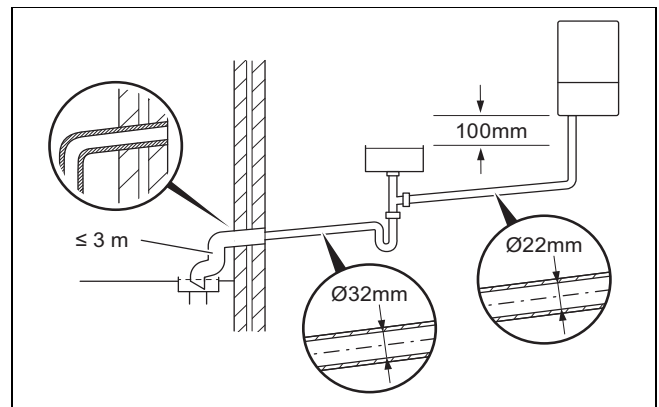

Preferred option for external termination




#### 7.5.6.1.5 External termination into soakaway

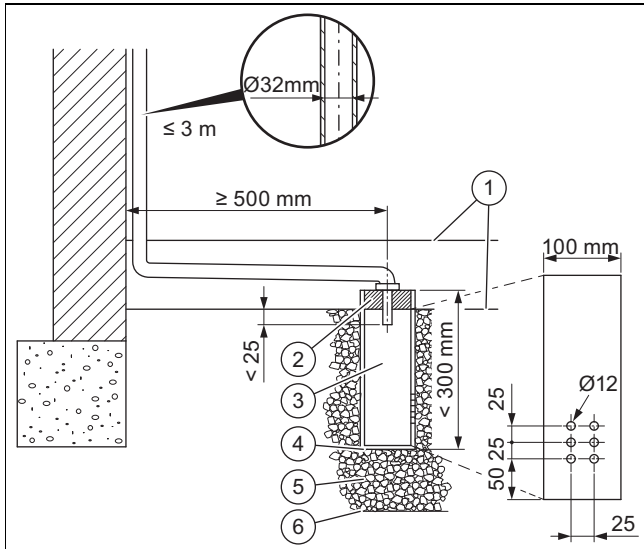

- |   |                                  |   |                              |
|---|----------------------------------|---|------------------------------|
| 1 | Ground (either/or)               | 4 | Bottom of sealed tube        |
| 2 | Seal                             | 5 | Limestone chippings          |
| 3 | Plastic tube,<br>100 mm diameter | 6 | Hole depth 400 mm<br>minimum |

Least preferred option, must not terminate in rain water drain


#### 7.5.6.1.6 Internal termination downstream of sink waste

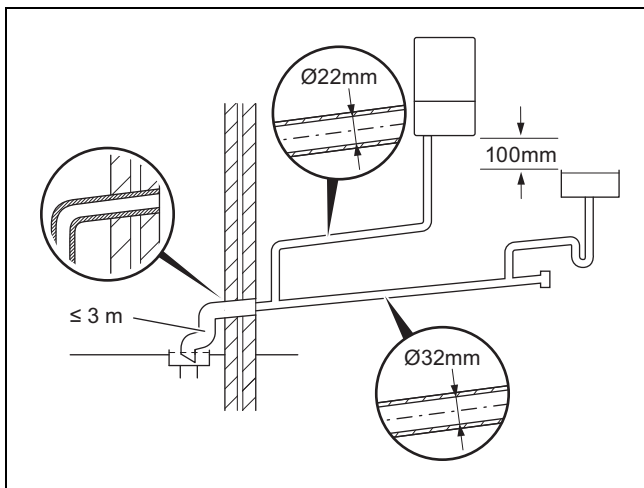

Open end of pipe direct into gulley below ground level but above water level


Susceptible to siphonage, must terminate in a gulley

#### 7.5.6.1.7 External termination into rain water down pipe

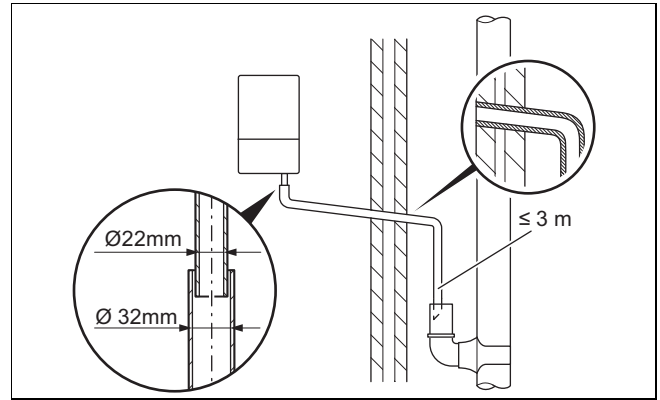


NB only combined foul/rainwater drain

#### 7.5.6.1.8 Additional methods of introducing air breaks

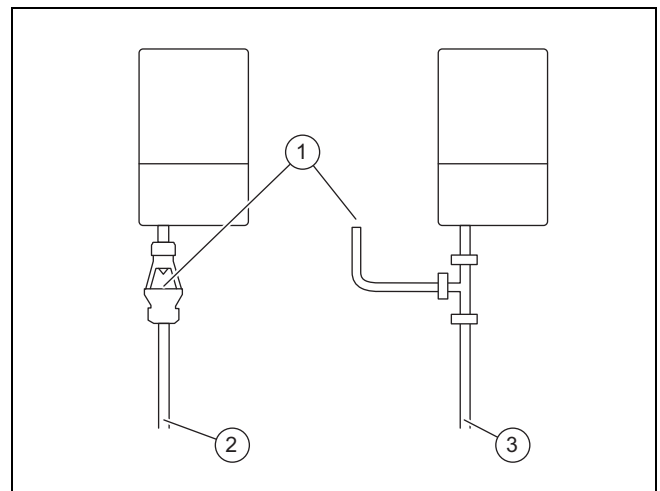

- |   |                 |   |              |
|---|-----------------|---|--------------|
| 1 | Air break       | 3 | Using a pipe |
| 2 | Using a tundish |   |              |

#### 7.5.6.1.9 Connection of condensate pump

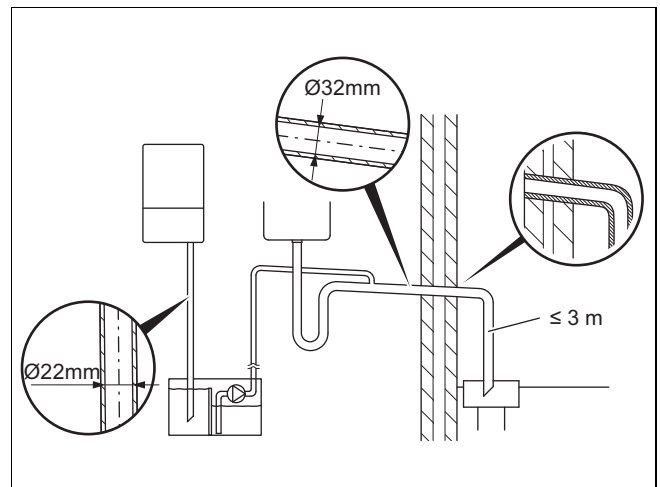


Preferred option for external connection



## 7.6 Flue installation

### 7.6.1 Installing and connecting the air/flue pipe

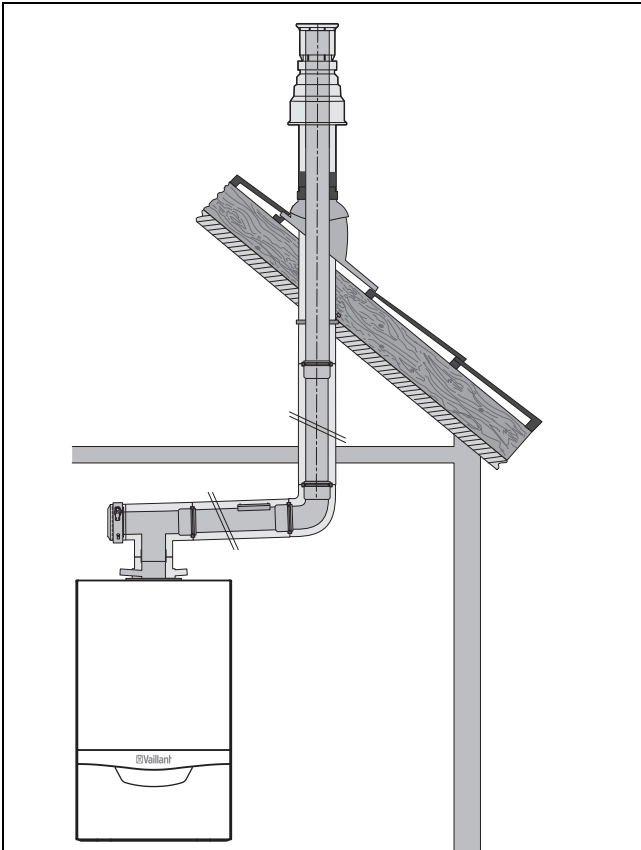

#### **Caution.**

#### **Risk of poisoning due to escaping flue gas.**

Mineral-oil-based greases can damage the seals.

- Instead of grease, use only water or commercially available soft soap to aid installation.



#### **Danger!**

#### **Risk of injury caused by unapproved air/flue pipes.**

The heat generators are system-certified together with the original air/flue pipes. For installation type B23P, third-party accessories are also permitted. You can find out if the heat generator is permitted for B23P in the technical data.

- Only use original air/flue pipes from the manufacturer.
- If third-party accessories are permitted for B23P, route the flue gas pipe connections properly, seal them and secure them against slipping out.



#### **Note**

All products feature a 110/160 mm diameter air/flue connection as standard.

2. You can find out which air/flue pipes may be used by consulting the enclosed set-up instructions for the air/flue system.

#### **Condition:** Installation in damp rooms

- You must connect the product to a room-sealed air/flue system. The combustion air must not be taken from the installation site.

3. Install the air/flue pipe using the set-up instructions.
4. Route the flue pipe with a downward gradient so that the condensate that accumulates can easily flow into the condensate trap provided for it.
5. Observe the information on positioning the air/flue terminal.

#### **Condition:** Boiler fitted as a single boiler in domestic premises

- Observe the information on positioning the opening for the air/flue pipe. (→ Page 15)

#### **Condition:** Boiler installed in a cascade or commercial premises

- When the boiler is installed in a cascade or commercial premises, then follow the requirements of IGEM / UP 10 for the flue termination and ventilation requirements:
  - <https://www.vaillant.co.uk>

## 7.7 Electrical installation

Only qualified electricians may carry out the electrical installation.



#### **Danger!**

#### **Risk of death from electric shock!**


Power supply terminals L and N remain live even if the on/off button is switched off:

- Disconnect the product from the power supply by switching off all power supplies at all poles (electrical partition with a contact gap of at least 3 mm, e.g. fuse or circuit breaker).
- Secure against being switched back on again.
- Wait for at least 3 minutes until the capacitors have discharged.
- Check that there is no voltage.

1. When installing the air/flue pipe, observe the provisions of the applicable national regulations.

## 7.7.1 Opening/closing the electronics box

### 7.7.1.1 Opening the electronics box

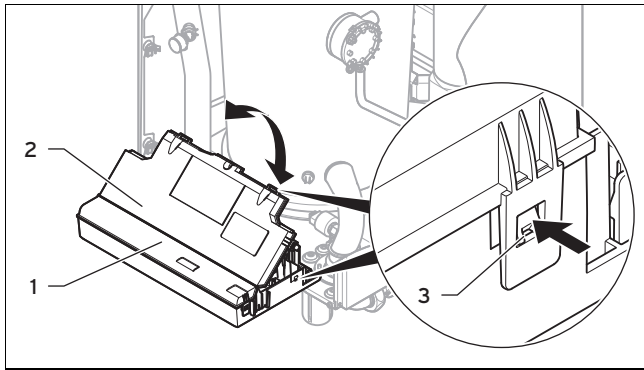

1. Remove the front casing. (→ Page 18)
2. Hinge the electronics box (1) forwards.
3. Remove the clips (3) from the retainers.
4. Hinge up the cover (2).

### 7.7.1.2 Closing the electronics box

1. Close the cover (2) by pressing it down onto the electronics box (1).
2. Ensure that all of the clips (3) audibly click into the retainers.
3. Hinge the electronics box upwards.

## 7.7.2 Carrying out the wiring



### Caution.

#### Risk of material damage caused by incorrect installation.

Mains voltage at the incorrect plug terminals on the ProE system may destroy the electronics.

- ▶ Do not connect any mains voltage to the eBUS terminals (+/-).
- ▶ Only connect the power supply cable to the terminals marked for the purpose.

1. Route the connection cables of the components to be connected through the grommet provided on the underside of the product.
2. Use the strain reliefs provided.
3. Shorten the connection cables according to requirements.
4. To prevent short circuits if a strand accidentally comes loose, only strip the outer sheathing of flexible ducts to a maximum of 30 mm.
5. Ensure the inner conductor insulation is not damaged when stripping the outer sheathing.
6. Only strip inner conductors just enough to establish good, sound connections.
7. To avoid short circuits resulting from loose individual wires, fit conductor end sleeves on the stripped ends of the conductors.
8. Screw the respective ProE plug to the connection cable.
9. Check whether all conductors are inserted mechanically securely in the ProE plug terminals. Remedy this if necessary.

10. Plug the ProE plug into the associated PCB slot.
11. Use the strain reliefs to secure the cable in the electronics box.

## 7.7.3 Establishing the power supply



### Caution.


#### Risk of material damage due to high connected voltage.

At mains voltages greater than 253 V, electronic components may be damaged.

- ▶ Ensure that the nominal voltage of the mains is 230 V (+10%/-14%) ~50 Hz.

1. Observe all valid regulations.
2. Open the electronics box. (→ Page 26)
3. Provide one common power supply for the boiler and for the corresponding control:
  - Power supply: Single-phase, 230 V, 50 Hz
  - Fuse protection:  $\leq 3$  A
4. Do not interrupt the mains supply with a time switch or programmer.
5. Connect the product using a fixed connection and a partition with a contact gap of at least 3 mm (e.g. fuses or power switches).
6. Isolation should preferably be by a double pole switched fused spur box having a minimum contact separation of 3 mm on each pole. The fused spur box should be readily accessible and preferably adjacent to the boiler. It should be identified as to its use.
7. Use a flexible line for the mains feed line, which is routed through the grommet into the product.
8. Carry out the wiring. (→ Page 26)
9. Observe the wiring diagram (→ Page 58).
10. Screw the supplied ProE plug to a suitable, flexible three-core power supply cable which complies with the relevant standards.
11. Close the electronics box. (→ Page 26)
12. Make sure that access to the power supply is always available and is not covered or blocked.

## 7.7.4 Connecting the pump group

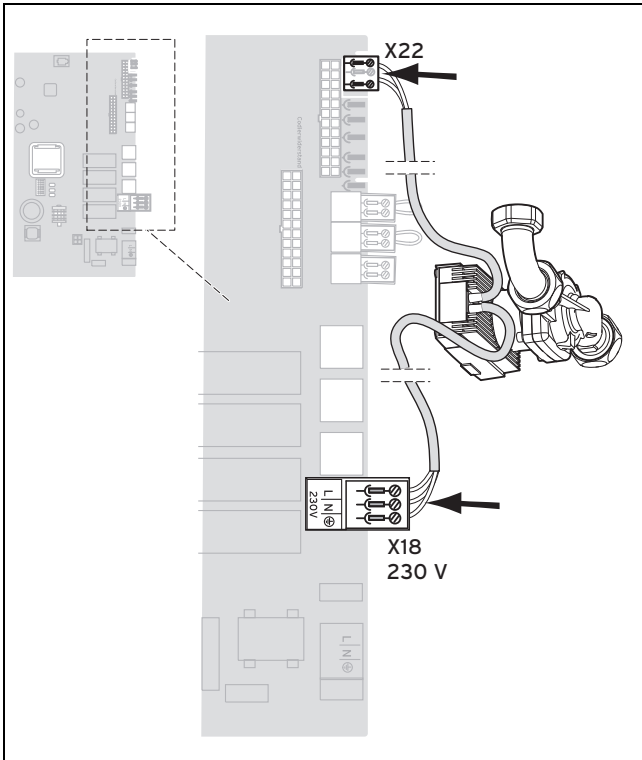

1. Open the electronics box. (→ Page 26)
2. Carry out the wiring. (→ Page 26)
3. Use the strain reliefs provided.
4. Plug the ProE plug for the power supply cable into slot X18.
5. Plug the ProE plug for the control cable into slot X22.
6. Close the electronics box. (→ Page 26)

## 7.7.5 Connecting controls to the electronics

1. Install the control if necessary.
2. Open the electronics box. (→ Page 26)
3. Carry out the wiring. (→ Page 26)
4. Observe the wiring diagram in the appendix.

**Condition:** Connecting a weather-compensated control or a room temperature control via eBUS

- ▶ Connect the control to the eBUS connection.
- ▶ Bridge the 24 V = **RT** connection (X100 or X106), if there is not already a bridge.

**Condition:** Connecting a low-voltage control (24 V)

- ▶ Remove the bridge and connect the control to the 24 V = **RT** connection (X100 or X106).

**Condition:** Connecting a limit thermostat for underfloor heating

- ▶ Remove the bridge and connect the limit thermostat to the **Burner off** connection.

5. Close the electronics box. (→ Page 26)



### Note

Due to the installed system separation, leave the pump in the factory setting:  
**Comfort D.018**

## 7.7.6 Connecting additional components

You can use the multi-functional module to actuate two additional components.

The following components can be actuated:

- Circulation pump
- External pump
- Cylinder charging pump
- Extraction hood
- External solenoid valve
- External fault signal
- Solar pump (not active)
- eBUS remote control (not active)
- Anti-legionella pump (not active)
- Solar valve (not active).

### 7.7.6.1 Using the VR 40 (2 in 7 multi-functional module)

1. Install the components in accordance with the respective instructions.
2. Select **D.027** (→ Page 35) to actuate relay 1 on the multi-functional module.
3. Select **D.028** (→ Page 35) to actuate relay 2 on the multi-functional module.

### 7.7.6.2 Using the flue non-return flap

For cascade operation, you must provide a flue non-return flap for each product. Either use only electrical flue non-return flaps or use only mechanical flue non-return flaps for all products in a cascade.

The electrical flue non-return flap is actuated by the **VR 40** multi-functional module. The installation instructions for the **VR 40** describe how the flue non-return flap is activated. The mechanical flue non-return flap has an integrated siphon, which must be filled with water before starting up the unit.

- ▶ For smooth operation with a flue non-return flap, use diagnostics code **D.050** (→ Page 35) to increase the offset for the minimum fan speed to the relevant **FIXED** value:

| VC/VM/VU                | 806  | 1006 | 1206 |
|-------------------------|------|------|------|
| Natural gas             | 2400 | 2000 | 1300 |
| Liquefied petroleum gas | 900  | 400  | –    |

### 7.7.7 Actuating the circulation pump according to requirements

1. Connect the wiring in the same way as described in "Connecting controllers to the electronic system (→ Page 27)".
2. Connect the supply line for the external button using terminals 1 ⊕ (0) and 6 (functional drawing) on the X41 edge connector, which is supplied with the controller.
3. Plug the edge connector into the PCB slot X41.

## 8 Operation

### 8.1 Operating concept of the product

The operating concept and the read-out and setting options of the end user level are described in the operating instructions.

An overview of the read-out and setting options of the installer level can be found in the section "Overview of the menu structure – Installer level" (→ Page 51).

### 8.2 Calling up the installer level

1. Only call up the installer level if you are a competent person.
2. Navigate to **Menu** → **Installer level** and confirm by pressing .
3. Set the value **17** (code) and confirm by pressing .

### 8.3 Live Monitor (status codes)

**Menu** → **Live Monitor**

Status codes in the display provide information on the product's current operating status.

Status codes – Overview (→ Page 55)

## 9 Start-up

### 9.1 Carrying out the initial start-up



#### Note

The complete heating system must be flushed at least twice: Once with cold water and once with domestic hot water in accordance with the following instructions (→ section "Flushing the heating installation for the first time")

Initial start-up must be carried out by a customer service technician or an authorised competent person using the first-commissioning-checklist and the commissioning checklist. The first-commissioning-checklist and the commissioning checklist (→ Page 60) in the appendix for the installation instructions must be filled out and stored carefully along with the product documentation.

Initial start-up checklist (→ Page 65)

- ▶ Carry out the initial start-up using the checklist and the commissioning checklist in the appendix.
- ▶ Fill out and sign the checklists.

### 9.2 Auxiliary service equipment

The following test and measuring equipment is required for start-up:

- CO<sub>2</sub> analyser
- Digital or U-tube manometer
- Flat-blade screwdriver, small
- 2.5 mm hex key

### 9.3 Switching on the product

- ▶ Press the on/off button on the product.
  - ◀ The basic display appears on the display.

### 9.4 Calling up unit configuration and diagnostics menu

To recheck and reset the most important system parameters, call up the **Unit configuration**.

**Menu → Installer level Unit configuration**

The setting options for more complex installations can be found in the **Diagnostics menu**.

**Menu → Installer level Diagnostics menu**

### 9.5 Running the installation assistants

The installation assistant is displayed whenever the product is switched on until it has been successfully completed. It provides direct access to the most important check programmes and configuration settings for starting up the product.

Confirm the launch of the installation assistant. All heating and domestic hot water demands are blocked whilst the installation assistant is active.

Confirm that you want to navigate to the next point by pressing **Next**.

If you do not confirm the launch of the installation assistant, it is closed 10 seconds after you switch on the unit and the basic display then appears.

### 9.5.1 Language

- ▶ Set the required language.
- ▶ Press (**OK**) twice to confirm the set language and to avoid unintentionally changing it.

If you have unintentionally set a language that you do not understand, proceed as follows to change it:

- ▶ **Simultaneously press and hold**  and .
- ▶ Also press the fault clearance key for a short time.
- ▶ Press and hold  and  until the display shows the language setting option.
- ▶ Select the required language.
- ▶ Confirm this change by pressing (**OK**) twice.

### 9.5.2 Filling mode

Filling mode (check programme **P.06**) is activated automatically in the installation assistant for as long as the filling mode appears on the display.

### 9.5.3 Purging

1. Unlike in the check programmes menu, to purge the system, start up the check programme **P.00** by pressing  or .
2. If you need to change the circuit that is being purged, press .

### 9.5.4 Target feed temperature, hot water temperature, Comfort mode

1. To set the target feed temperature, hot water temperature and Comfort mode, use the  and  buttons.
2. Confirm the setting by pressing (**OK**).

### 9.5.5 Partial heat load

The partial heat load of the product is set to **Auto** at the factory. This means that the product independently determines the optimum heat output depending on the current heat demand of the installation. The setting can also be changed at a later point using **D.000**.

### 9.5.6 Additional relay and multi-functional module

Additional components that are connected to the product can be adjusted here. This setting can be changed using **D.027** and **D.028**.

### 9.5.7 Competent person telephone number

You can store your telephone number in the unit menu. The end user can view the telephone number. The telephone number can be up to 16 digits long and must not contain any spaces.

### 9.5.8 Ending the installation assistant

Once the installation assistant has been completed and confirmed, it will not start up automatically next time the unit is switched on.

## 9.6 Restarting the installation assistants

You can restart the installation assistant at any time by calling it up in the menu.

**Menu → Installer level → Start inst. assistant**

## 9.7 Using check programmes

**Menu → Installer level → Test programmes → Check programmes**

By activating various check programmes, you can trigger special functions on the product.

| Display | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| P.00    | <p>Purging check programme:<br/>The boiler circulation pump is cyclically actuated.<br/>The heating circuit is purged via the automatic air vent.</p> <p>1 x : Start heating circuit purging<br/>3 x  (): Restart heating circuit purging<br/>1 x  (<b>Cancel</b>): End purge programme</p> <p><b>Note</b><br/>The purge programme runs for 7.5 min per circuit and then terminates.<br/>Purging the heating circuit:<br/>Actuating the external pump for 15 cycles: 15 s on, 10 s off. Display: <b>Active heating circuit</b>.</p> |
| P.01    | <p>Maximum load check programme:<br/>After successful ignition, the product is operated at maximum heat input.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| P.02    | <p>Minimum load check programme:<br/>After successful ignition, the product is operated at minimum heat input.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| P.06    | <p>Filling mode check programme:<br/>The burner and pump are switched off (to fill or drain the product).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |



### Note

If the product is in error condition, you cannot start any check programmes. You can detect an error condition by the fault symbol shown in the left bottom corner of the display. You must first reset.

To terminate the check programmes, you can press (**Cancel**) at any time.

## 9.8 Test programmes

As well as the installation assistants, you can also call up the test programmes for start-up, maintenance and troubleshooting.

**Menu → Installer level Test programmes**

There you will find the **Check programmes** (→ Page 30), in addition to the **Function menu**, an **Electronics self-test** and the **Gas family check**.

## 9.9 Checking and treating the heating water/filling and supplementary water



### Caution.

**Risk of material damage due to poor-quality heating water**

- ▶ Ensure that the heating water is of sufficient quality.

- ▶ Before filling or topping up the installation, check the quality of the heating water.

### Checking the quality of the heating water

- ▶ Remove a little water from the heating circuit.
- ▶ Check the appearance of the heating water.
- ▶ If you ascertain that it contains sedimentary materials, you must desludge the installation.
- ▶ Use a magnetic rod to check whether it contains magnetite (iron oxide).
- ▶ If you ascertain that it contains magnetite, clean the installation and apply suitable corrosion-inhibition measures, or fit a magnetic filter.
- ▶ Check the pH value of the removed water at 25 °C.
- ▶ If the value is below 8.2 or above 10.0, clean the installation and treat the heating water.
- ▶ Ensure that oxygen cannot get into the heating water.

### Checking the filling and supplementary water

- ▶ Before filling the installation, measure the hardness of the filling and supplementary water.

### Treating the filling and supplementary water

- ▶ Observe all applicable national regulations and technical rules when treating the filling and supplementary water.

Provided the national regulations and technical rules do not stipulate more stringent requirements, the following applies:

You must treat the heating water in the following cases

- If the entire filling and supplementary water quantity during the operating life of the system exceeds three times the nominal volume of the heating installation, or
- If the values shown in the curve (Appendix) have been exceeded, or
- If the pH value of the heating water is less than 8.2 or more than 10.0.



### Caution.

**Risk of material damage if the heating water is treated with unsuitable additives.**

Unsuitable additives may cause changes in the components, noises in heating mode and possibly subsequent damage.

- ▶ Do not use any unsuitable frost and corrosion protection agents, biocides or sealants.

No incompatibility with our products has been detected to date with proper use of the following additives.

- ▶ When using additives, follow the manufacturer's instructions without exception.

We accept no liability for the compatibility of any additive or its effectiveness in the rest of the heating system.



### Additives for cleaning measures (subsequent flushing required)

- Adey MC3+
- Adey MC5
- Fernox F3
- Sentinel X 300
- Sentinel X 400

### Additives intended to remain permanently in the installation

- Adey MC1+
- Fernox F1
- Fernox F2
- Sentinel X 100
- Sentinel X 200

### Additives for frost protection intended to remain permanently in the installation

- Adey MC ZERO
- Fernox Antifreeze Alphi 11
- Sentinel X 500

- ▶ If you have used the above-mentioned additives, inform the end user about the measures that are required.
- ▶ Inform the end user about the measures required for frost protection.

## 9.10 Filling the condensate trap




### Danger!

#### Risk of poisoning due to escaping flue gas.

An empty or insufficiently filled condensate trap may allow flue gas to escape into the room air.

- ▶ Fill the condensate trap with water before starting up the product.

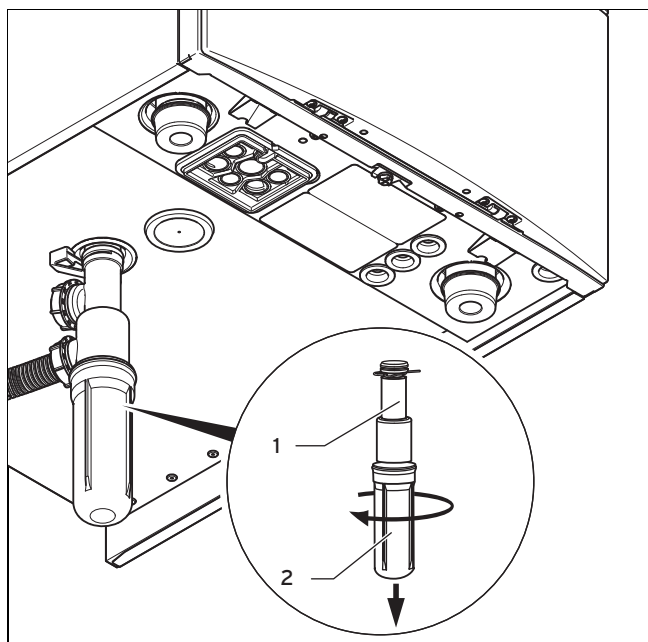

1. Remove the lower section of the condensate trap(2) by unscrewing it from the condensate trap (1).
2. Fill the lower section of the condensate trap with water up to about 10 mm below the upper edge.

3. Secure the lower section of the condensate trap correctly to the condensate trap again.

## 9.11 Reading off the filling pressure

The product's supply pipe is equipped with an analogue pressure gauge, a symbolic bar graph display and a digital pressure gauge.

- ▶ To read off the digital filling pressure value, press the  button twice.

If the heating installation is full, in order to ensure that it operates smoothly, the indicator on the pressure gauge must point to the upper half of the grey area or to the middle of the bar graph display on the display (marked by the dashed limit values) when the heating installation is cold. This corresponds to a filling pressure of between 0.1 MPa and 0.2 MPa (1.0 bar and 2.0 bar).

If the heating installation extends over several storeys, higher filling pressures may be required to avoid air entering the heating installation.

## 9.12 Preventing low water pressure

To prevent damage to the boiler that is caused by a filling pressure that is too low, the boiler is fitted with a water pressure sensor. If the filling pressure falls below 0.1 MPa (1.0 bar), the product indicates low pressure by displaying a flashing pressure value. If the filling pressure falls below 0.05 MPa (0.5 bar), the product switches off. The display shows **F.22**.

- ▶ Top up the heating water to start the product up again.

The pressure value flashes in the display until a pressure of 0.11 MPa (1.1 bar) or higher has been reached.

- ▶ If you notice frequent drops in pressure, determine and eliminate the cause.

## 9.13 Flushing the heating system for the first time ("cold")



### Note

Establish suitable connections for correctly filling the boiler circuit and use a suitable filling device. Due to the system separation, separate connections are required for the installation circuit.

1. Check that all thermostatic radiator valves and both service valves on the boiler are open.
2. Select the check programme **P.06**.
  - ◀ The pumps do not run and the product does not enter heating mode.
3. Open the filling water supply.
4. Slowly fill the boiler and the heating installation.
5. Open all available purging valves in the heating system.



### Note

The boiler is equipped with an automatic air vent. Other measures need to be taken to allow the heating system to be purged during filling and during commissioning either manually or using an automatic air vent.

6. Connect a hose to the drain valve that is located at the lowest position in the heating system.

7. Connect a hose to the boiler's drain valve.
8. Open these two drain valves so that the water can drain quickly. Start at the next point in the installation and open the purging valves on the radiators so that the contaminated water can completely drain.
9. Close the drain cocks.

## 9.14 Filling and purging the boiler and heating system

**Condition:** The heating installation and the boiler have been rinsed thoroughly.

- ▶ Select the check programme **P.06**.
    - ◁ The pumps do not run and the product does not enter heating mode.
1. Proceed in accordance with the information provided on treating (→ Page 30) heating water and on the topic of water hardness (→ Page 67).
  2. Open the filling water supply.
  3. Check that both service valves on the boiler are open.
  4. Slowly fill the boiler.
  5. Observe the increasing filling pressure in the boiler.
  6. Fill with water until the required filling pressure is reached.
  7. Close off the filling system but keep ready to top up as air is expelled during the purging process.
  8. To purge the boiler, select check programme **P.00**.
    - ◁ The boiler does not start up, the external pump operates intermittently and purges either the heating circuit or the domestic hot water circuit. The display shows the boiler's filling pressure.
  9. To be able to carry out the purging process properly, the filling pressure must not fall below the minimum filling pressure.
    - Minimum filling pressure: 0.1 MPa (1.0 bar)



### Note

The check programme **P.00** runs for 7.5 minutes per circuit.

At the end of the filling process, the filling pressure should be at least 0.02 MPa (0.2 bar) above the counter-pressure of the expansion vessel ("Exp") ( $P_{\text{Installation}} \geq P_{\text{Exp}} + 0.02 \text{ MPa (0.2 bar)}$ ).

10. If there is still too much air in the boiler at the end of the check programme **P.00**, restart the check programme.
11. Check all connections and the entire system for leak-tightness (→ Page 35).
12. Check the expansion relief valve by opening it briefly.
  - ◁ Water escapes from the expansion relief valve.
13. Complete and sign off the Benchmark commissioning check list and then register the guarantee.

## 9.15 Checking the gas setting

### 9.15.1 Checking the factory setting



#### Caution.

**An incorrect gas group setting may cause operating faults or a reduction in the service life of the product.**

If the product design does not match the local gas group, malfunctions will occur or you will have to replace product components prematurely.

- ▶ Before you start up the product, compare the gas group information on the data plate with the gas group available at the installation site.

The product's combustion has been factory tested and is preset for operation with the gas group indicated on the data plate.

**Condition:** The product design is **not compatible** with the local gas group

- ▶ If you want to operate the product with liquefied petroleum gas, contact customer service or the product manufacturer for gas conversion.


A gas conversion must only be carried out by Vaillant customer service or the manufacturer of the product.

**Condition:** The product design is **compatible** with the local gas group

- ▶ Proceed as described below.

### 9.15.2 Checking the leak-tightness of the flue gas system and for flue gas recirculation

1. Check the flue gas installation is intact in accordance with the latest gas safe technical bulletin and information supplied in the installation instructions.
2. For extended flue gas installations check for flue gas recirculation using the air analysis point.

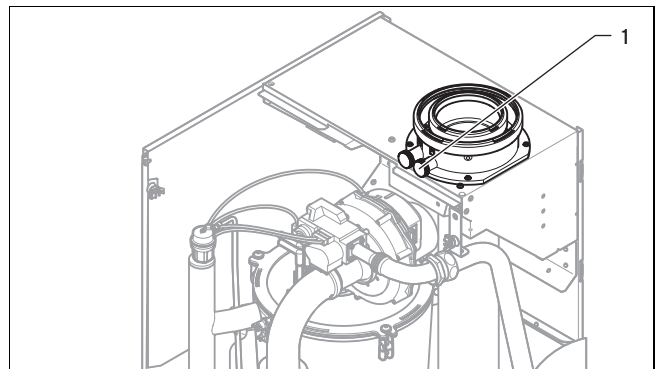

3. Use the air analysis point **(1)** to check for flue gas recirculation.
4. Use a flue gas analyser.
5. If you discover CO or CO<sub>2</sub> in the supply air, search for the leak in the flue gas installation or for signs of flue gas recirculation.
6. Eliminate the damage properly.
7. Check again whether the supply air contains any CO or CO<sub>2</sub>.
8. If you cannot eliminate the damage, do not start up the product.



### 9.15.3 Checking the gas flow rate

The boiler is fitted with a multifunctional automatic gas valve which ensures that the precise air/gas ratio is provided under all operating conditions.

The gas flow rate has been set during production and does not require adjustment. With the front casing fitted check the gas flow rate of the boiler as follows:

- ▶ Start up the product with the check programme **P.01**.
- ▶ Ensure that maximum heat can be dissipated into the heating system by turning up the room thermostat.
- ▶ Wait at least 5 minutes until the boiler has reached its operating temperature.
- ▶ Ensure that all other gas appliances in the property are turned off.
- ▶ Measure the gas flow rate at the gas meter.
- ▶ Compare the measured values with the corresponding values in the table.

| Qnw from the data plate | H gas in m³/h |       |       |
|-------------------------|---------------|-------|-------|
|                         | Nom.          | +5 %  | -10 % |
| 76.2                    | 8.10          | 8.51  | 7.29  |
| 95.2                    | 10.10         | 10.61 | 9.09  |
| 114.3                   | 12.10         | 12.71 | 10.89 |


**Condition:** Gas flow rate not in the permissible range

- ▶ Check all of the piping and ensure that the gas flow rates are correct.
- ▶ Only put the product into operation once the gas flow rates have been corrected.

**Condition:** Gas flow rate in the permissible range

- ▶ End the check programme **P.01**.
- ▶ Allow the boiler to cool down by allowing pump overrun to operate for a minimum of 2 minutes.
- ▶ Record the boiler maximum gas flow rate onto the Benchmark gas boiler commissioning checklist.

### 9.15.4 Checking the gas flow pressure

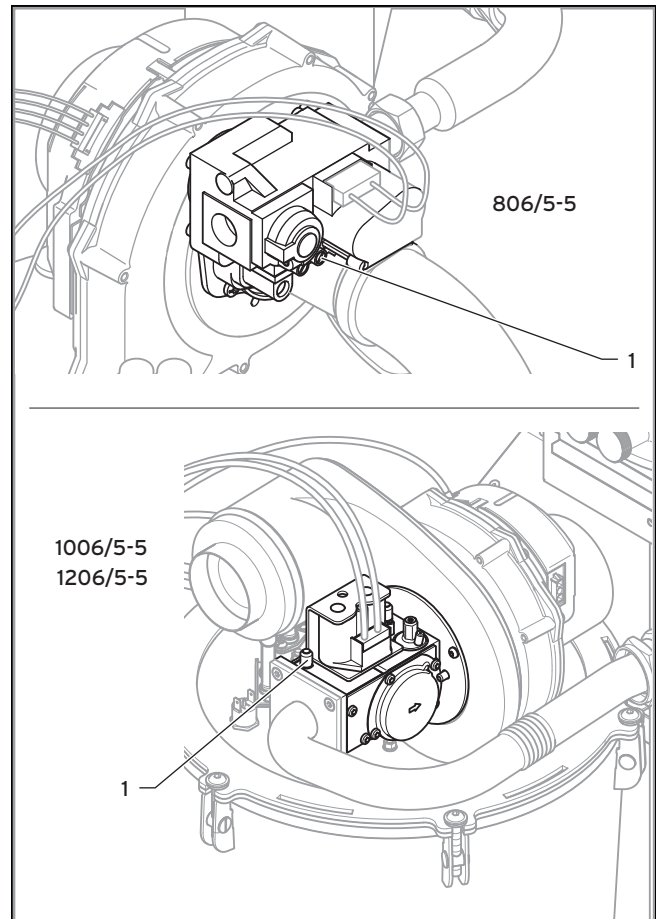

1. Ensure that the gas inlet working pressure can be obtained with all other gas appliances in the property working.
2. Close the gas stopcock.
3. Use a screwdriver to undo the sealing screw of the test nipple (1) at the gas valve assembly.
4. Connect a manometer to the test nipple (1).
5. Open the gas stopcock.
6. Start up the product with the check programme **P.01**.
7. In addition, ensure that maximum heat can be dissipated into the heating system by turning up the room thermostat.
8. With the boiler operating at full load check that the gas inlet working pressure at the reference test point (1) complies with the requirements.
  - Permissible gas flow pressure for operation with natural gas H: 1.7 to 2.5 kPa (17.0 to 25.0 mbar)
9. Should the pressure recorded at the reference test point in the boiler be lower than indicated check if there is any blockage in the pipework or if the pipework is undersized.

**Condition:** Gas flow pressure **not** in the permissible range



#### Caution.

**Risk of material damage and operating faults caused by incorrect gas flow pressure.**

If the gas flow pressure lies outside the permissible range, this can cause operating faults in and damage to the product.

- ▶ Do not make any adjustments to the product.
- ▶ Check the gas installation.
- ▶ Do not start up the product.

- ▶ If you cannot correct the failure, notify the gas supply company and proceed as follows:
- ▶ End the check programme **P.01**.
- ▶ Allow the boiler to cool down by allowing pump overrun to operate for a minimum of two minutes.
- ▶ Close the gas stopcock.
- ▶ Remove the pressure gauge and retighten the sealing screw (1) for the measuring nipple.
- ▶ Open the gas stopcock.
- ▶ Check the test nipple for gas tightness.
- ▶ Close the gas stopcock.
- ▶ Install the front casing. (→ Page 18)
- ▶ Disconnect the product from the power grid.
- ▶ You must not start up the boiler.

**Condition:** Gas flow pressure in the permissible range

- ▶ End the check programme **P.01**.
- ▶ Allow the boiler to cool down allowing pump overrun to operate for a minimum of two minutes.
- ▶ Close the gas stopcock.
- ▶ Remove the pressure gauge and retighten the sealing screw (1) for the measuring nipple.
- ▶ Open the gas stopcock.
- ▶ Check the test nipple for gas tightness.
- ▶ Install the front casing. (→ Page 18)
- ▶ Reset boiler controls for normal operation.
- ▶ Record the appliance gas inlet working pressure (kPa resp. mbar) in the Benchmark gas boiler commissioning checklist.


### 9.15.5 Checking the O<sub>2</sub> or CO<sub>2</sub> content and CO/CO<sub>2</sub> ratio



#### Note

Generally no O<sub>2</sub>/CO<sub>2</sub> setting on initial commissioning! If the measured values are outside the permitted tolerance, look for the cause. If you are unable to rectify the problem do not attempt to adjust the gas valve because it is pre-set in the factory. Contact customer service.

1. Start up the product with the check programme **P.01** (full load).
2. Wait at least five minutes until the product reaches its operating temperature.

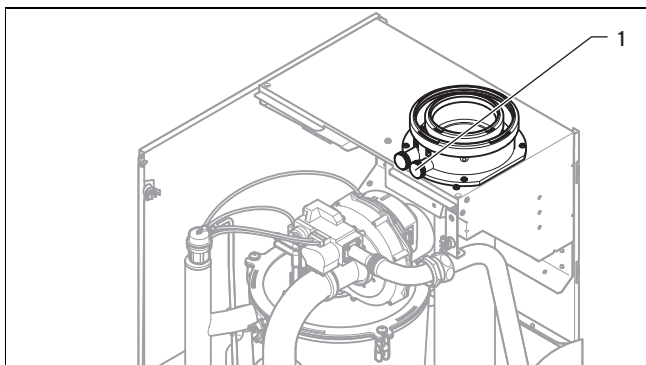

**Condition:** Product is operated with natural gas

- ▶ Always measure the O<sub>2</sub> content at the flue gas analysis point (1). The gas installation must be completely purged!

**Condition:** Product is operated with liquefied petroleum gas

- ▶ Always measure the CO<sub>2</sub> content at the flue gas analysis point (1). The gas installation must be completely purged!

3. Compare the measured values with the corresponding target values in the table.

|                                                 | Unit               | Natural gas H | Propane    |
|-------------------------------------------------|--------------------|---------------|------------|
| W <sub>s</sub> *                                | kWh/m <sup>3</sup> | 15.0          | 21.3       |
| CO                                              | ppm                | ≤ 250         |            |
| CO/CO <sub>2</sub>                              |                    | 0.0031        | 0.0027     |
| with closed front casing                        |                    |               |            |
| CO <sub>2</sub> **                              | vol%               | 9.0 ± 1.0     | 10.3 ± 0.5 |
| O <sub>2</sub> **                               | vol%               | 4.9 ± 1.8     | –          |
| with removed front casing                       |                    |               |            |
| CO <sub>2</sub> **                              | vol%               | 8.8 ± 1.0     | 10.1 ± 0.5 |
| O <sub>2</sub> **                               | vol%               | 5.3 ± 1.8     | –          |
| * preset to upper Wobbe index (W <sub>s</sub> ) |                    |               |            |
| ** after 5 minutes in full load mode            |                    |               |            |

4. Start check programme **P.02** (minimum load).

**Condition:** Product is operated with natural gas

- ▶ Always measure the O<sub>2</sub> content at the flue gas analysis point (1). The gas installation must be completely purged!

**Condition:** Product is operated with liquefied petroleum gas

- ▶ Always measure the CO<sub>2</sub> content at the flue gas analysis point (1). The gas installation must be completely purged!

5. Compare the measured values with the corresponding target values in the table.

|                                            | Unit | Natural gas H | Propane    |
|--------------------------------------------|------|---------------|------------|
| CO <sub>2</sub> *                          | vol% | 8.0 to 9.5    | –          |
| O <sub>2</sub> *                           | vol% | 3.9 to 6.6    | 4.5 to 6.8 |
| * at minimum load with closed front casing |      |               |            |

6. If one of the values is outside of the tolerance and you are unable to rectify the problem do not attempt to adjust the gas valve because it is pre-set in the factory. Contact customer service.

### 9.16 Thoroughly flushing the heating system ("hot")

1. Ensure that the water within the boiler is clean and low in temporary hardness and no system debris can circulate through the boiler during first firing.
2. Keep this firing time short and temperature no higher than 50°C as this is just to remove contaminants and not for balancing the system at this time.
3. Operate the boiler until the water is up to temperature (max 50 °C).
4. Check the heating system for leaks.
5. Connect a hose to the drain valve at the boiler.
6. Shut off the boiler, open the drain valve and all purge valves and allow the water to flow out of the boiler quickly and fully.
7. Close the drain valve.

8. Proceed in accordance with the information provided on treating heating water in "Checking and treating the heating water/filling and supplementary water" (→ Page 30).
9. Re-fill the boiler in accordance with "Filling and purging the heating installation" (→ Page 32).
10. Ensure that the inhibitor levels are correctly maintained throughout the boilers operational life.



#### Note

The actual reading on the digital pressure gauge should ideally be 0,05 MPa (0,5 bar) plus an additional pressure corresponding to the highest point of the system above the base of the boiler – 10 m head equals an additional 1 bar reading on the pressure gauge. The minimum pressure should not be less than 0,1 MPa (1 bar) in any installation. If the system is to be treated with an inhibitor it should be applied at this stage in accordance with the manufacturer's instructions. Further information can be found regarding inhibitor treatment in "Checking and treating the heating water/filling and supplementary water" (→ Page 30).

11. Install the front casing. (→ Page 18)

### 9.17 Checking leak-tightness

- ▶ Check the gas pipe, the heating circuit and the hot water circuit for leak-tightness.
- ▶ Check that the flue system has been installed correctly.

#### 9.17.1 Checking the heating mode

1. Make sure that there is a heat requirement.
2. Call up the **Live Monitor**.
  - **Menu → Live Monitor**
    - ◁ If the product is working correctly, the display shows **S.04**.

#### 9.17.2 Checking the hot water generation



#### Danger!

#### Risk of death from legionella.

Legionella multiply at temperatures below 60 °C.

- ▶ Ensure that the end user is familiar with all of the Anti-legionella measures in order to comply with the applicable regulations regarding legionella prevention.

**Condition:** Cylinder connected

- ▶ Make sure that the cylinder thermostat is requesting heat.
1. Call up the **Live Monitor**.

#### – **Menu → Live Monitor**

- ◁ If the cylinder is charged correctly, the display shows **S.24**.
2. If you have connected a controller which can be used to set the hot water temperature, set the hot water temperature on the boiler to the maximum possible temperature.
  3. Adjust the target temperature for the connected domestic hot water cylinder to the controller.
    - ◁ The boiler adopts the set target temperature which is set on the controller (automatic calibration in newer controllers).
  4. Set the hot water temperature.

**Condition:** Water hardness: > 3,57 mol/m<sup>3</sup>

- Water temperature: ≤ 50 °C

## 10 Adapting the unit to the heating installation

To reset the most important system parameters, use the **Unit configuration** menu item.

#### **Menu → Installer level Unit configuration**

Or manually relaunch the installation assistant.

#### **Menu → Installer level → Start inst. assistant**

### 10.1 Calling up diagnostics codes

The settings options for more complex systems can be found in the **Diagnostics menu**.

#### **Menu → Installer level Diagnostics menu**

Overview of diagnostics codes (→ Page 53)

Using the parameters that are marked as adjustable in the overview of diagnostics codes, you can adapt the product to the heating installation and the needs of the customer.

- ▶ Press  or  to change the diagnostics code.
- ▶ Press  (**Select**) to select the parameter to change.
- ▶ Press  or  to change the current setting.
- ▶ Press (**OK**) to confirm your selection.

### 10.2 Setting the partial heat load

The partial heat load of the product is set to **Auto** at the factory. If you still want to set a fixed maximum partial heat load, you can set a value under **D.000**, which equates to the product output in kW.

If the product is operated in a cascade, increase the offset for the minimum fan speed (**D.050**) to the values specified in the table (→ Page 27).

If a domestic hot water cylinder (cylinder type VIH) is installed, you can adjust the partial load setting for the cylinder charging to the cylinder type (**D.077**).

### 10.3 Setting the pump overrun

You can set the pump overrun under **D.001** (factory setting: 5 min.).



#### Note

The internal pump's operating mode is set to **Comfort** at the factory. The pump is switched on when the heating flow temperature is not at **Heating off** (→ Operating instructions) and the heat requirement is enabled via an external control.

You must not change the factory setting under **D.018**!

### 10.4 Setting the maximum flow temperature

You can set the maximum flow temperature for the heating mode under **D.071** (factory setting: 75 °C).

### 10.5 Setting the return temperature control system

If the product is connected to an underfloor heating system, the temperature control can be changed from flow temperature control (factory setting) to return temperature control under **D.017**. If you have activated the return temperature control under **D.017**, the automatic heat output determination function is not active. If you set **D.000** to **Auto** anyway, the product operates with the maximum possible partial heat load.

### 10.6 Burner anti-cycling time

#### 10.6.1 Setting the burner anti-cycling time

To prevent frequent switching on and off of the burner and thus prevent energy losses, an electronic restart lockout is activated for a specific period each time the burner is switched off. You can adjust the burner anti-cycling time to the conditions of the heating installation. The burner anti-cycling time is only active for the heating mode. You can set the maximum burner anti-cycling time under **D.002** (factory setting: 20 min.). The effective burner anti-cycling times with respect to the target flow temperature ( $T_{Flow}$ ) and the maximum set burner anti-cycling time can be found in the following table:

| $T_{Flow}$ [°C] | Set maximum burner anti-cycling time [min] |     |     |      |      |      |      |
|-----------------|--------------------------------------------|-----|-----|------|------|------|------|
|                 | 1                                          | 5   | 10  | 15   | 20   | 25   | 30   |
| 30              | 2.0                                        | 4.0 | 8.5 | 12.5 | 16.5 | 20.5 | 25.0 |
| 35              | 2.0                                        | 4.0 | 7.5 | 11.0 | 15.0 | 18.5 | 22.0 |
| 40              | 2.0                                        | 3.5 | 6.5 | 10.0 | 13.0 | 16.5 | 19.5 |
| 45              | 2.0                                        | 3.0 | 6.0 | 8.5  | 11.5 | 14.0 | 17.0 |
| 50              | 2.0                                        | 3.0 | 5.0 | 7.5  | 9.5  | 12.0 | 14.0 |
| 55              | 2.0                                        | 2.5 | 4.5 | 6.0  | 8.0  | 10.0 | 11.5 |
| 60              | 2.0                                        | 2.0 | 3.5 | 5.0  | 6.0  | 7.5  | 9.0  |
| 65              | 2.0                                        | 1.5 | 2.5 | 3.5  | 4.5  | 5.5  | 6.5  |
| 70              | 2.0                                        | 1.5 | 2.0 | 2.5  | 2.5  | 3.0  | 3.5  |
| 75              | 2.0                                        | 1.0 | 1.0 | 1.0  | 1.0  | 1.0  | 1.0  |

| $T_{Flow}$ [°C] | Set maximum burner anti-cycling time [min] |      |      |      |      |      |
|-----------------|--------------------------------------------|------|------|------|------|------|
|                 | 35                                         | 40   | 45   | 50   | 55   | 60   |
| 30              | 29.0                                       | 33.0 | 37.0 | 41.0 | 45.0 | 49.5 |
| 35              | 25.5                                       | 29.5 | 33.0 | 36.5 | 40.5 | 44.0 |

| $T_{Flow}$ [°C] | Set maximum burner anti-cycling time [min] |      |      |      |      |      |
|-----------------|--------------------------------------------|------|------|------|------|------|
|                 | 35                                         | 40   | 45   | 50   | 55   | 60   |
| 40              | 22.5                                       | 26.0 | 29.0 | 32.0 | 35.5 | 38.5 |
| 45              | 19.5                                       | 22.5 | 25.0 | 27.5 | 30.5 | 33.0 |
| 50              | 16.5                                       | 18.5 | 21.0 | 23.5 | 25.5 | 28.0 |
| 55              | 13.5                                       | 15.0 | 17.0 | 19.0 | 20.5 | 22.5 |
| 60              | 10.5                                       | 11.5 | 13.0 | 14.5 | 15.5 | 17.0 |
| 65              | 7.0                                        | 8.0  | 9.0  | 10.0 | 11.0 | 11.5 |
| 70              | 4.0                                        | 4.5  | 5.0  | 5.5  | 6.0  | 6.5  |
| 75              | 1.0                                        | 1.0  | 1.0  | 1.0  | 1.0  | 1.0  |



#### Note

The remaining burner anti-cycling time following a regular shutdown in heating mode can be called up under **D.067**.

### 10.6.2 Resetting the remaining burner anti-cycling time

#### 1st option

Menu → **Reset anti-cycling time**

The current burner anti-cycling time appears in the display.

- Confirm the burner anti-cycling time reset by pressing ( **Select** ).

#### 2nd option

- Press the reset button.

### 10.7 Setting the maintenance interval

If you set the maintenance interval, the message that the product must be serviced appears in the display, together with the maintenance symbol , after a configurable number of burner operating hours. The display on the eBUS control shows the information **Maintenance MAIN**.

- Set the operating hours until the next maintenance work is due using **D.084**. You can set the operating hours in increments of ten from 0 to 3010 h (hours).

If you do not set a numerical value, but instead set the symbol "-", the **"Maintenance display"** function is not active.



#### Note

On completion of the set operating hours, you must set the maintenance interval again.

### 10.8 Pump output (high-efficiency pump)

The product can be equipped with a pump group with a high-efficiency pump (accessories). The pump is fully modulating and is actuated according to the heat requirement.


The remaining feed head of this pump group is designed so that the full heat output is transported as far as the system separation.

#### Remaining feed head

The following values apply for a pump speed target value ≥ 85%:


| Unit output                                                                                         | 80 kW                  | 100 kW                 | 120 kW                 |
|-----------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|
| Circulation water volume at maximum heat input ( $\Delta T=23$ K)                                   | 2.99 m <sup>3</sup> /h | 3.74 m <sup>3</sup> /h | 4.49 m <sup>3</sup> /h |
| Water pressure downstream of the boiler at maximum water flow rate, <b>with</b> non-return valve    | 0.065 MPa (0.650 bar)  | 0.053 MPa (0.530 bar)  | 0.042 MPa (0.420 bar)  |
| Water pressure downstream of the boiler at maximum water flow rate, <b>without</b> non-return valve | 0.073 MPa (0.730 bar)  | 0.061 MPa (0.610 bar)  | 0.050 MPa (0.500 bar)  |

### 80 kW boiler with high-efficiency pump

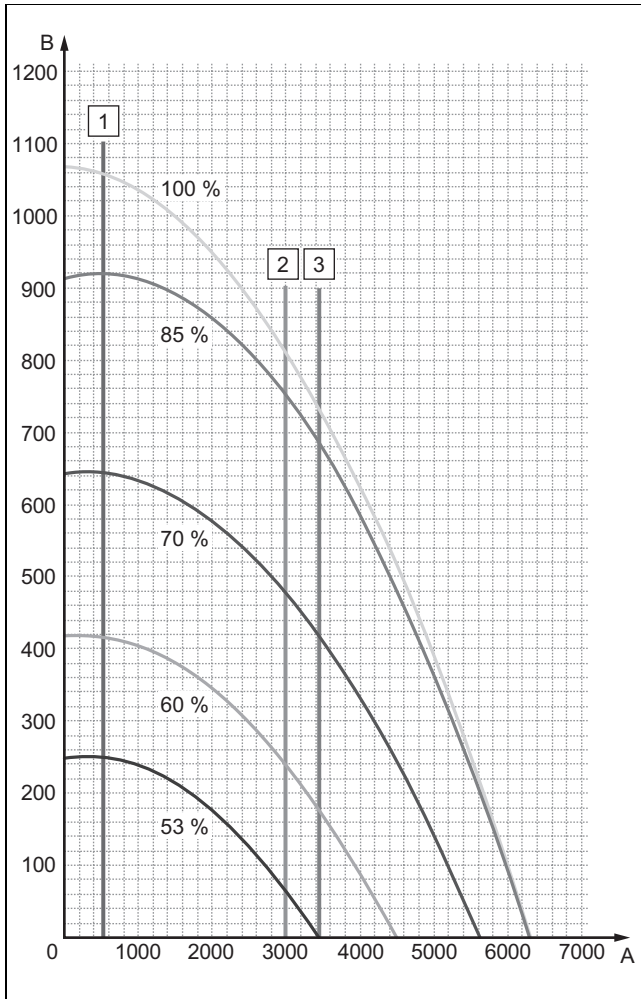

- |   |                                                                   |   |                                                                   |
|---|-------------------------------------------------------------------|---|-------------------------------------------------------------------|
| 1 | Circulation water volume at minimum heat input                    | 3 | Circulation water volume at maximum heat input ( $\Delta T=20$ K) |
| 2 | Circulation water volume at maximum heat input ( $\Delta T=23$ K) | A | Circulation water volume [l/h]                                    |
|   |                                                                   | B | Remaining feed head [mbar]                                        |


### 100 kW boiler with high-efficiency pump

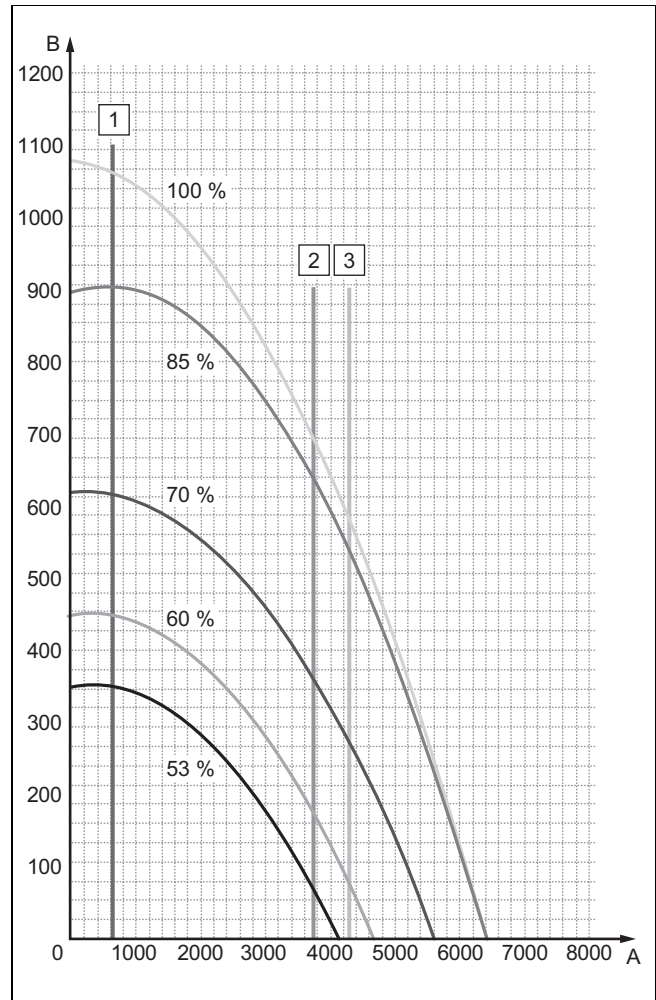

- |   |                                                                   |   |                                                                   |
|---|-------------------------------------------------------------------|---|-------------------------------------------------------------------|
| 1 | Circulation water volume at minimum heat input                    | 3 | Circulation water volume at maximum heat input ( $\Delta T=20$ K) |
| 2 | Circulation water volume at maximum heat input ( $\Delta T=23$ K) | A | Circulation water volume [l/h]                                    |
|   |                                                                   | B | Remaining feed head [mbar]                                        |



## 120 kW boiler with high-efficiency pump

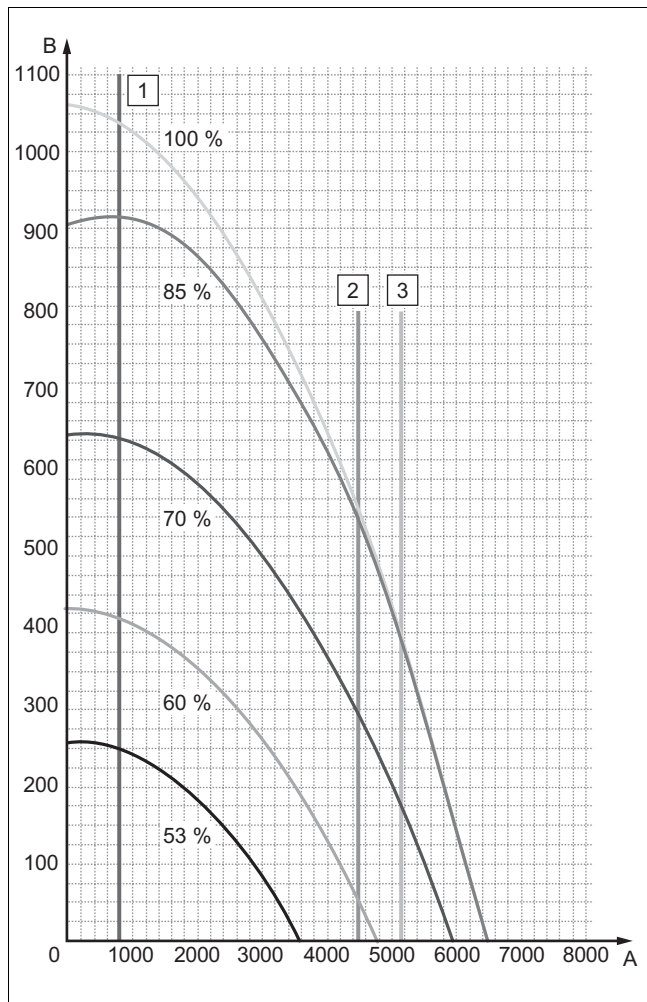

- |   |                                                                   |   |                                                                   |
|---|-------------------------------------------------------------------|---|-------------------------------------------------------------------|
| 1 | Circulation water volume at minimum heat input                    | 3 | Circulation water volume at maximum heat input ( $\Delta T=20$ K) |
| 2 | Circulation water volume at maximum heat input ( $\Delta T=23$ K) | A | Circulation water volume [l/h]                                    |
|   |                                                                   | B | Remaining feed head [mbar]                                        |

- Inform the end user that they must have the product maintained in accordance with the specified intervals.
- Pass all of the instructions and documentation for the product to the end user for safe-keeping.
- Inform the end user about measures taken to ensure the supply of combustion air and flue gas guiding, and instruct the operator that he must not make any changes.
- Inform the end user that they must not store or use explosive or highly flammable substances (such as petrol, paper or paint) in the installation room of the product.
- Complete and sign off the Benchmark commissioning check list.
- Complete and sign off the guarantee documentation.

## 11 Handing over to the end user

- At the time of commissioning complete all relevant sections of the Benchmark commissioning checklist, located at the rear of this document.
- For IE: Complete a "Declaration of Conformity" to indicate compliance to I.S. 813. An example of this is given in the current edition of I.S. 813.
- When you have finished the installation, affix the enclosed sticker (which requests that the user reads the instructions) to the front of the product in the end user's language.
- Draw attention, to the current issue of the Gas Safety (Installation and Use) Regulations, Section 35, which imposes a duty of care on all persons who let out any property containing a gas appliance in the UK.
- Explain to the end user how the safety devices work and where they are located.
- Inform the end user how to handle the product.
- In particular, draw attention to the safety warnings that the end user must follow.

## 12 Inspection and maintenance

### 12.1 Complete Service Interval Record section

- ▶ After servicing, complete the relevant Service Interval Record section of the Benchmark Checklist located on the inside back pages of this document.

### 12.2 Using original seals

If you replace components, use only the enclosed original seals; additional sealing materials are not required.

### 12.3 Inspection and maintenance

- ▶ You must carry out an annual inspection of the product. The annual inspection can be effectively performed without removing components by requesting data from the DIA system, carrying out the simple visual checks indicated in the table in the appendix and performing a flue gas measurement. The maintenance intervals and their scope are determined by the heating engineer based on the condition of the boiler found during the inspection. All inspection and maintenance work should be performed in the order specified in the table in the appendix.

During any inspection and maintenance or after change of parts of the combustion circuit, the following must be checked:

- The boiler has been installed in accordance with the relevant installation instructions.
- The integrity of the flue gas installation and flue seals is in accordance with the relevant flue installation instructions enclosed.
- Visual, the integrity of the boiler combustion circuit and relevant seals (paying particular attention to the burner door seal).
- The gas inlet working pressure at maximum rate.
- The gas flow rates.
- Correctness of electrical, water and gas connections.
- Correctness of the water pressure.
- The condition of the whole system, in particular the condition of radiator valves, evidence of leakage from the heating system and dripping taps.
- ▶ Correct any faults before proceeding.

### 12.4 Auxiliary service equipment:

You require the following tool for the inspection and maintenance:

- WAF 8 socket spanner with extension
- Torx screwdriver 20, 25 and 30
- 5 mm hex key

### 12.5 Observing inspection and maintenance intervals



#### Warning.

**Risk of injury and a risk of material damage caused by negligent inspection and maintenance work.**

Negligence in inspection and maintenance work, as well as failure to comply with the specified inspection and maintenance intervals, may impair the operational safety of the product and lead to injuries and material damage.

- ▶ Instruct the end user that the prescribed inspection and maintenance intervals must be complied with as a minimum requirement.
- ▶ Carry out a regular inspection once a year.
- ▶ Carry out regular maintenance work in line with the findings from the inspection. The maintenance interval must not be longer than two years.



#### Warning.

**Risk of injury and death due to improper inspection and maintenance!**

Improper performance of inspections and maintenance work may result in leaks or even an explosion.

- ▶ Inspection and maintenance work on the product must only be carried out by professionally qualified persons.

Any customer service work must be carried out by a professionally qualified person in accordance with the safety, installation and operating provisions for gas-fired units. Professional qualification must be confirmed by an adequately recognised organisation or public office.



#### Note

The person who carries out a combustion measurement must be trained in the use of a flue gas measuring instrument and in interpreting the results. The flue gas measuring instrument that is used must be calibrated in accordance with the specifications of the measuring instrument manufacturer. The correct fuel type must be set on the flue gas measuring instrument.

### Inspection

The inspection is intended to determine the actual condition of the product and compare it with the target condition. This is done by measuring, checking and observing.

### Maintenance

Maintenance is required in order to eliminate any deviations of the actual condition from the target condition. This is normally done by cleaning, setting and, if necessary, replacing individual components that are subject to wear.

As the competent person, you determine the maintenance intervals (at least once every two years) and their scope



based on the how you define the condition of the product during the inspection. Carry out all inspection and maintenance work in the sequence shown in Appendix C.

## 12.6 Preparing the maintenance work

1. Switch off the product.
2. Disconnect the product from the power grid.
3. Remove the front casing. (→ Page 18)
4. Close the gas stopcock.
5. Close the service valves in the heating flow and in the heating return.
6. Close the service valve in the cold water pipe.
7. Drain the product to clean hydraulic components (→ Page 44).
8. Ensure that water does not drip on live components (e.g. the electronics box).
9. Use only new seals and o'ring. Do not use additional compounds.

## 12.7 Using the function menu

The function menu allows you to actuate and test individual components in the heating installation.

**Menu → Installer level → Test programmes → Function menu**

- Choose the heating installation components.
- Press (**Select**) to confirm your selection.

| Display | Test programme                | Action                                                                                            |
|---------|-------------------------------|---------------------------------------------------------------------------------------------------|
| T.01    | Check boiler circulation pump | Switch the boiler circulation pump on and off.                                                    |
| T.03    | Check fan                     | Switch the fan on and off. The fan runs at maximum rotational speed.                              |
| T.04    | Check cylinder charging pump  | Switch the cylinder charging pump on and off.                                                     |
| T.05    | Check circulation pump        | Switch the circulation pump on and off.                                                           |
| T.06    | Check external pump           | Switch the external pump on and off.                                                              |
| T.08    | Checking the burner           | The product starts up and switches to minimum load. The flow temperature is shown in the display. |

### Terminate function menu

- To terminate the function menu, select (**Cancel**).

## 12.8 Carrying out electronics self-tests

**Menu → Installer level → Test programmes → Electronics self-test**

You can use the electronics self-test to check the PCB in advance.

## 12.9 Checking the electrical plug connections

1. Use the main switch to switch off the product.
2. Disconnect the product from the power supply by switching off the circuit breaker in the case of a fixed connection.

**Condition:** Product disconnected from the power supply

- Check that the electrical plug connections and connections are working correctly and are connected correctly.

## 12.10 Removing the gas-air mixture unit




### Note

The gas-air mixture unit consists of four main components:


- Speed-regulated fan,
- Air intake pipe,
- Gas valve assembly,
- Burner

1. Switch off the product using the on/off button.
2. Disconnect the product from the power grid.
3. Close the gas stopcock.
4. Remove the front casing. (→ Page 18)
5. Remove the upper casing. (→ Page 18)

**Condition:** Applies for 80 kW

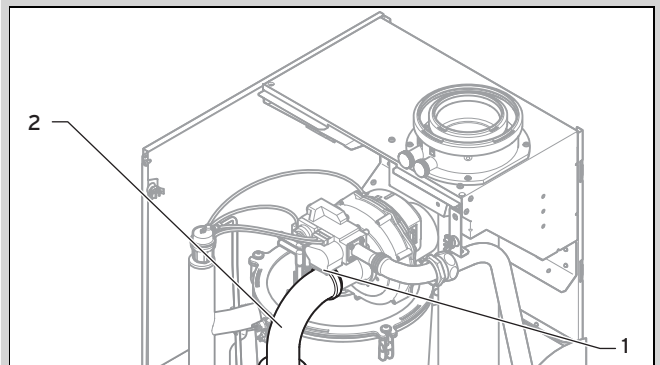


- Undo the clip (**1**) on the air intake pipe (**2**). and remove the air intake pipe from the intake stub.

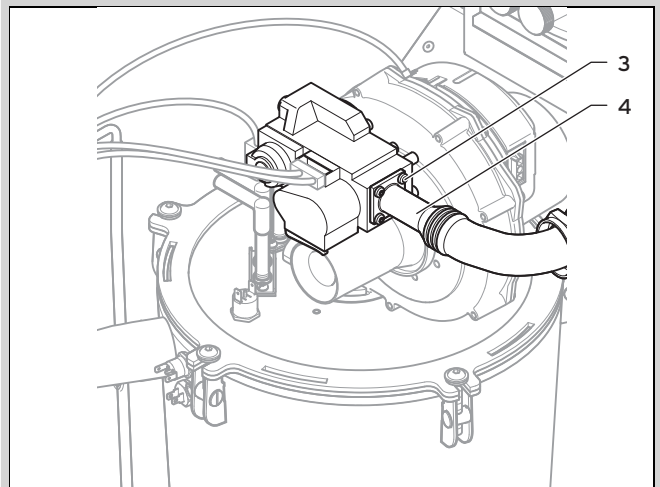


- Undo the four screws on the flange connection (**3**) to the gas valve assembly.

**Condition:** Applies for 100 kW and 120 kW

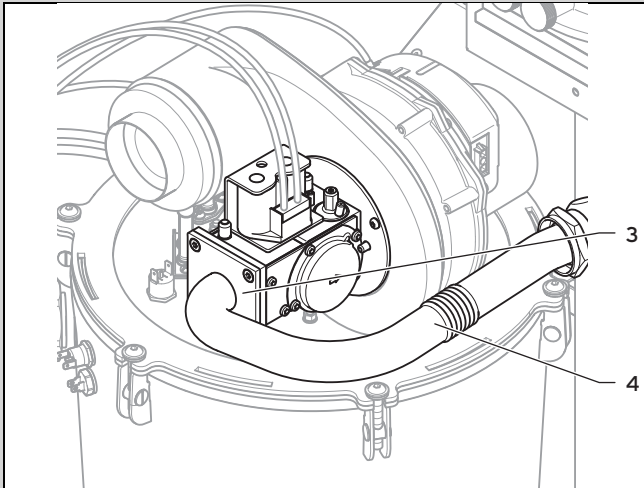


► Undo the four screws on the flange connection (3) to the gas valve assembly.

6. Move the gas pipe (4) to the side.

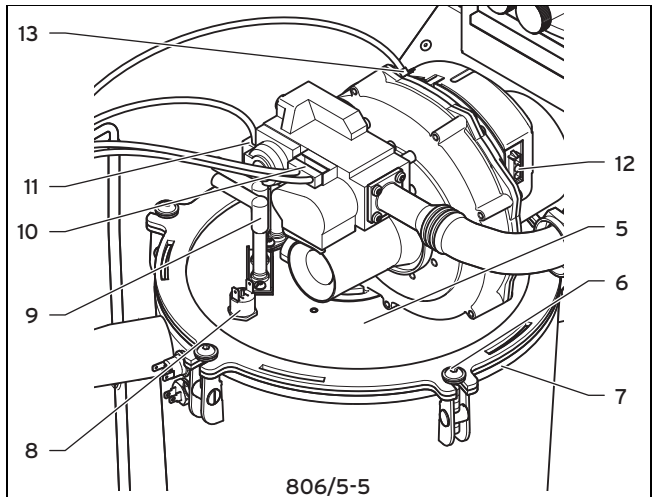

806/5-5

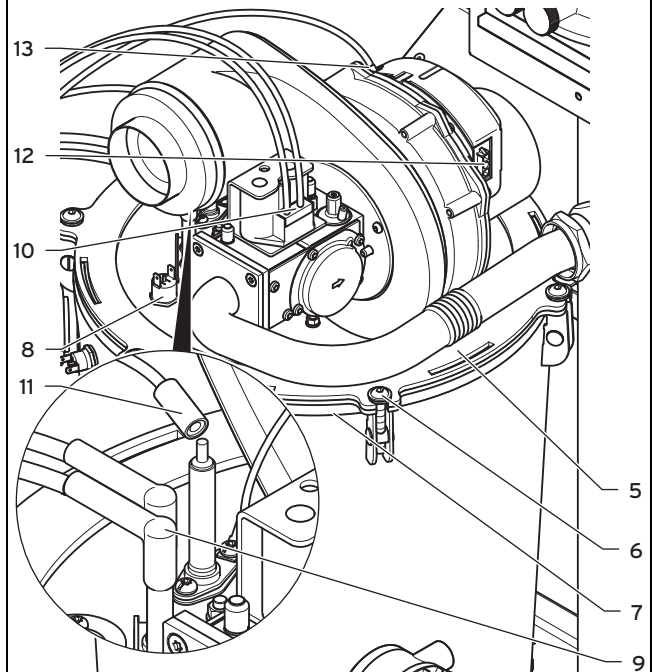

1006/5-5

1206/5-5



### **Danger!**

**Risk of poisoning and fire caused by escaping gas!**

The gas pipe may become damaged.

- Ensure that you do not damage the sealing surfaces on the gas pipe when removing and installing the gas-air mixture unit.

7. Remove the ionisation line plug from the ionisation electrode (11), and remove the earth connection plug from the earthing lug.
8. Remove the ignition line plug and the earth connection for the ignition electrode (9) from the ignition transformer.




### **Note**

The cable is firmly connected to the ignition electrode.

9. Remove the plugs **(12)** and **(13)** from the fan motor by pushing in the latching lug.
10. Remove the plug from the gas valve assembly **(10)**.
11. Remove the plug from the upper safety cut-out **(8)**.
12. Undo the screws **(6)** on the burner door.
13. Remove the complete gas-air mixture unit **(5)** from the heat exchanger **(7)**.
14. Check the burner and the heat exchanger for damage and dirt.


### 12.11 Cleaning the heat exchanger

1. Protect the electronics box from spraying water.

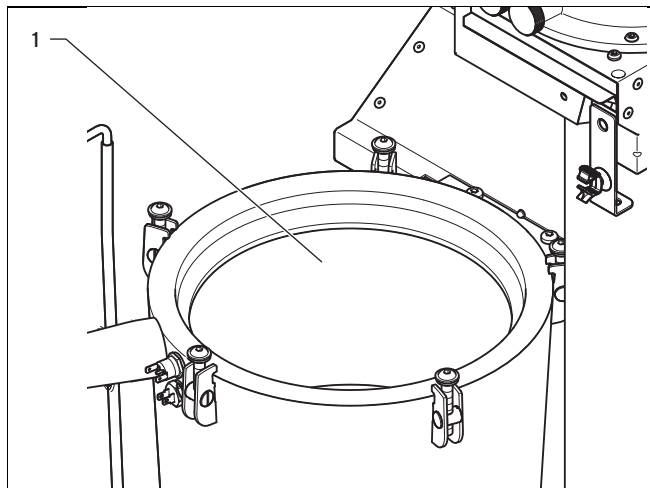


2. Remove the lower section of the condensate trap to ensure that any existing condensate neutraliser does not become damaged.
3. Rinse away any loose dirt in the heat exchanger **(1)** with a sharp jet of water or use a plastic brush.
  - ◁ The water flows out of the heat exchanger through the drain.
4. Install the condensate trap.

### 12.12 Checking the burner

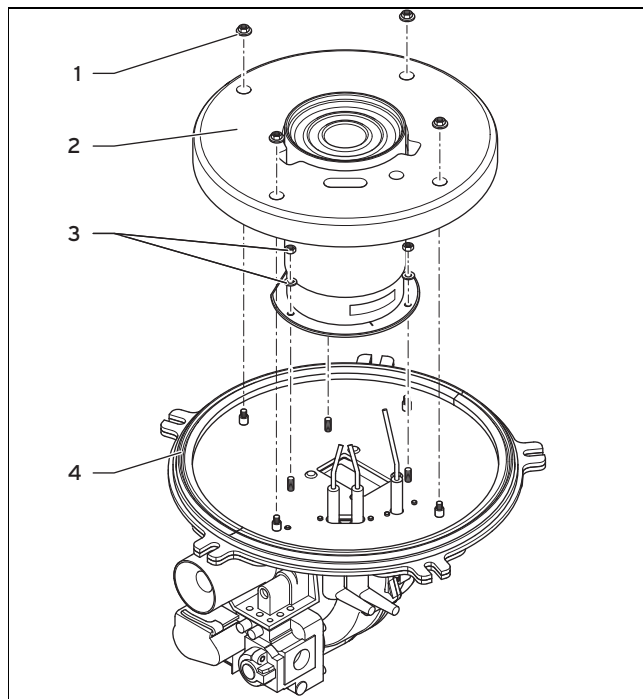

1. Check the surface of the burner for damage. If you notice any damage, replace the burner, including the seal (→ Page 46).
2. Check the insulating mat **(2)** on the burner door. If you notice any signs of damage, replace the insulating mat (→ Page 46).

### 12.13 Replacing the ignition and ionisation electrodes

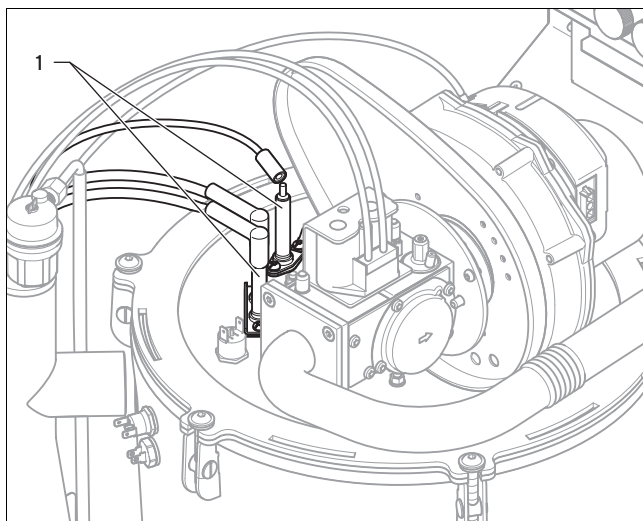

#### Caution.

**Risk of material damage caused by damage to the ignition and ionisation electrodes.**


The electrodes may become damaged during installation.

- Install the new electrodes only after first installing the gas-air mixture unit.

1. Remove the electrodes **(1)** from the burner door from above.

2. Insert the new electrodes with new seals.
  - Torque: 2.8 Nm



### 12.14 Cleaning the condensate trap

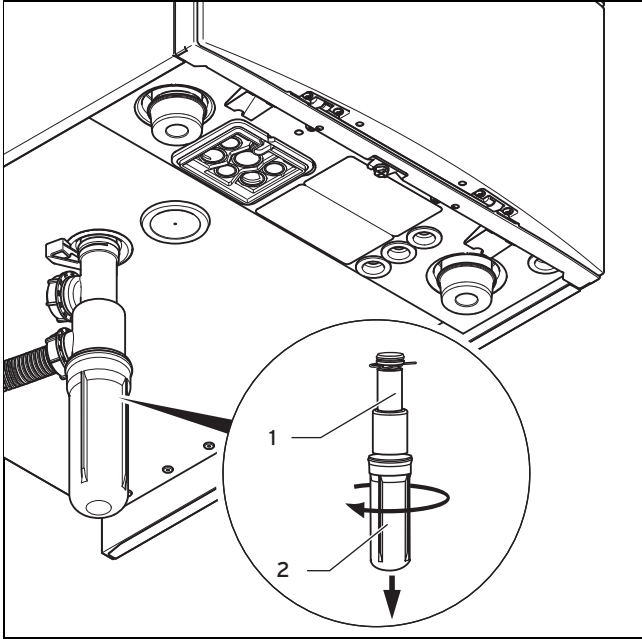

1. Remove the lower section of the condensate trap(2) by unscrewing it from the condensate trap (1).
2. Flush out the lower section of the condensate trap with water.
3. Fill the lower section of the condensate trap with water up to about 10 mm below the upper edge.
4. Secure the lower section of the condensate trap to the condensate trap again.

### 12.15 Installing the gas-air mixture unit

1. Replace the seal in the burner door.
2. Ensure that the bracket for the insulating mat is installed properly again after it is replaced.
3. Replace all seals at the sealing points opened during the maintenance work.

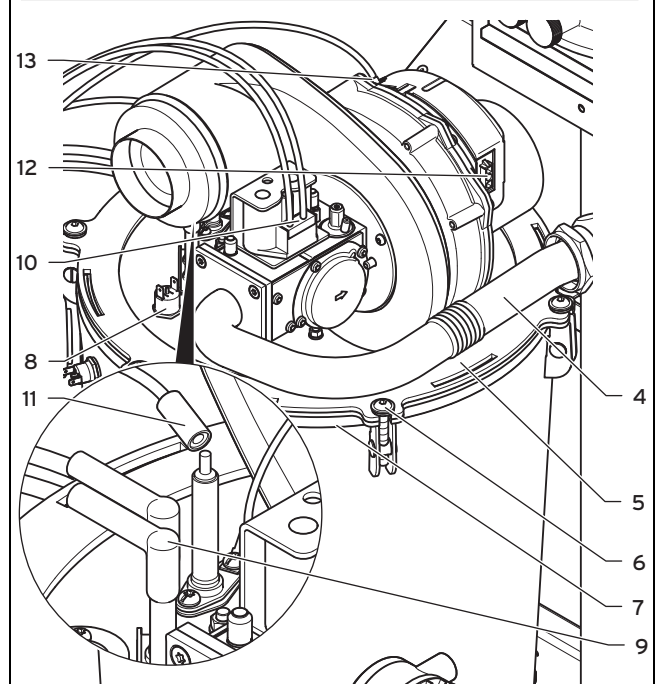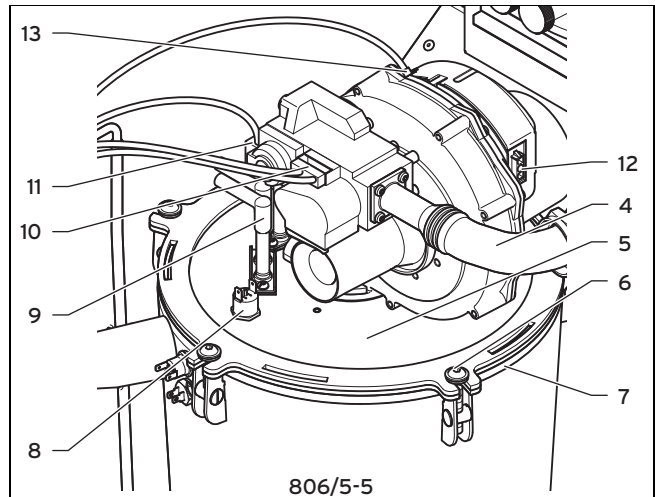

4. Connect the gas-air mixture unit (5) to the heat exchanger (7).
5. Tighten the screws (6) in a cross-wise pattern until the burner door fits closely and uniformly onto the mating surfaces.
  - Torque: 10 Nm
6. Connect the ignition line plug and the earth connection for the ignition electrodes (9) to the ignition transformer.
7. Connect the ionisation line plug to the ionisation electrode (11) and connect the earth connection plug to the earthing lug.
8. Connect the safety cut-out plug to the upper safety cut-out (8).
9. Connect the plugs (12) and (13) to the fan motor.
10. Connect the plug (10) to the gas valve assembly.
11. Connect the gas pipe (4) with a new seal to the gas valve assembly.

Condition: Applies for 80 kW

- Torque: 2 Nm

Condition: Applies for 100 kW and 120 kW

- Torque: 2.8 Nm



### Warning.


### Risk of poisoning and fire caused by escaping gas!

Gas can escape through leaks.

- Check the gas tightness at the gas connection using leak detection spray.

12. Open the gas stopcock on the product.

Condition: Applies for 80 kW

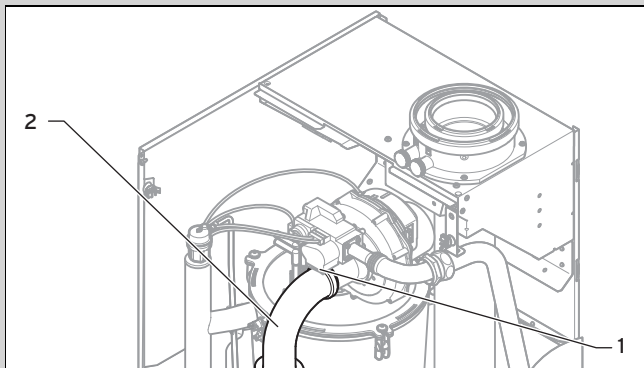

- Check that the sealing ring in the air intake pipe (2) is positioned correctly in the seal seat.
- Reconnect the air intake pipe to the intake stub.
- Secure the air intake pipe with the clip (1) on the intake stub.

13. Close the electronics box.
14. Install the front casing. (→ Page 18)
15. Re-establish the connection to the mains power.

### 12.16 Draining the product

1. Switch off the product using the on/off button.
2. Close the service valves of the product.
3. Start the check programme **P.06**.
4. Open the drain valves.
5. Check the water for clouding and additives and correct this if required.

### 12.17 Checking the filling pressure of the boiler and the heating installation

1. Check the filling pressure of the boiler and the heating installation, top them up with heating water, if necessary, and purge them.
2. Fill and purge the boiler and the heating system. (→ Page 32)

### 12.18 Checking the quality of the heating water

- Check the quality of the heating water: Clarity (clouding), correct inhibitor and pH value. (→ Page 30)

### 12.19 Completing inspection and maintenance work

- Start a test operation after the maintenance.
- Check the heating mode and, if required, the domestic hot water generation (if available).
- Check the gas flow pressure. (→ Page 33)
- Check the O<sub>2</sub> or CO<sub>2</sub> content and the CO/CO<sub>2</sub> ratio and adjust these if required. (→ Page 46)
- If required, reset the maintenance interval. (→ Page 36)
- Install the front casing.
- Fill out the relevant Service Record section in the Benchmark Checklist.

### 12.20 Checking the product for leak-tightness

- Check that the product is leak-tight. (→ Page 35)

## 13 Troubleshooting

You can find an overview of the fault codes in the appendix.

Overview of fault codes (→ Page 56)

### 13.1 Contacting your service partner

If you contact your Vaillant service partner, if possible, please mention

- the fault code that is displayed (**F.xx**),
- the product status (**S.xx**) that is displayed on the Live Monitor (→ Page 28).

### 13.2 Calling up service messages

If the  maintenance symbol appears in the display, there is a service message.

The maintenance symbol appears if you have set a maintenance interval, for example, and it has elapsed. The product is not in fault mode.

- To obtain more information about the service message, call up the **Live monitor** (→ Page 28).

Condition: **S.44-S.48** is displayed

The product is in Comfort protection mode. The product continues to run with restricted comfort after it has detected a fault.

- To establish whether or not a component is defective, read the fault memory (→ Page 45).



### Note

If no fault message is present, the product will automatically switch back to normal operating mode after a certain time.



### 13.3 Reading off the fault codes

If a fault develops in the product, the display shows a fault code **F.xx**.

Fault codes have priority over all other displays.

If multiple faults occur at the same time, the display shows the corresponding fault codes for two seconds each in sequence.

- ▶ Rectify the fault.
- ▶ To restart the product, press the fault clearance key (Operating instructions).
- ▶ If you are unable to remedy the fault and the fault recurs despite several fault clearance attempts, contact Vaillant Service.

### 13.4 Querying the fault memory

#### Menu → Installer level Fault list

The product has a fault memory. You can use this to query the last ten faults that occurred in chronological order.

The display shows:

- The number of faults that have occurred
  - The fault currently selected with fault number **F.xx**
  - A plain text display explaining the fault.
  - ▶ You can display the last ten faults that have occurred by pressing **[-]** or **[+]**.
- Overview of fault codes (→ Page 56)

### 13.5 Resetting the fault memory

- ▶ To delete the entire fault list, press **[Delete, OK]** twice.

### 13.6 Resetting parameters to factory settings

- ▶ To reset all parameters simultaneously to the default settings, set **D.096** to **1**.

### 13.7 Performing diagnostics

- ▶ You can use the function menu (→ Page 40) to actuate and test individual components of the product in the fault diagnostics.

### 13.8 Using check programmes

You can also use check programmes (→ Page 30) for troubleshooting.

### 13.9 Preparing the repair work

1. Decommission the product.
2. Disconnect the product from the mains power.
3. Remove the front casing.
4. Close the gas stopcock.
5. Close the service valves in the heating flow and in the heating return.
6. Close the service valve in the cold water pipe.
7. Drain the product if you want to replace water-carrying components of the product.
8. Ensure that water does not drip on live components (e.g. the electronics box).
9. Use only new seals.

### 13.10 Procuring spare parts


The original components of the product were also certified by the manufacturer as part of the declaration of conformity. If you use other, non-certified or unauthorised parts during maintenance or repair work, this may result in the product no longer meeting the applicable standards, thereby voiding the conformity of the product.

We strongly recommend that you use original spare parts from the manufacturer as this guarantees fault-free and safe operation of the product. To receive information about the available original spare parts, contact the contact address provided on the back page of these instructions.

- ▶ If you require spare parts for maintenance or repair work, use only the spare parts that are permitted for the product.

### 13.11 Replacing defective components

#### 13.11.1 Replacing the gas valve assembly

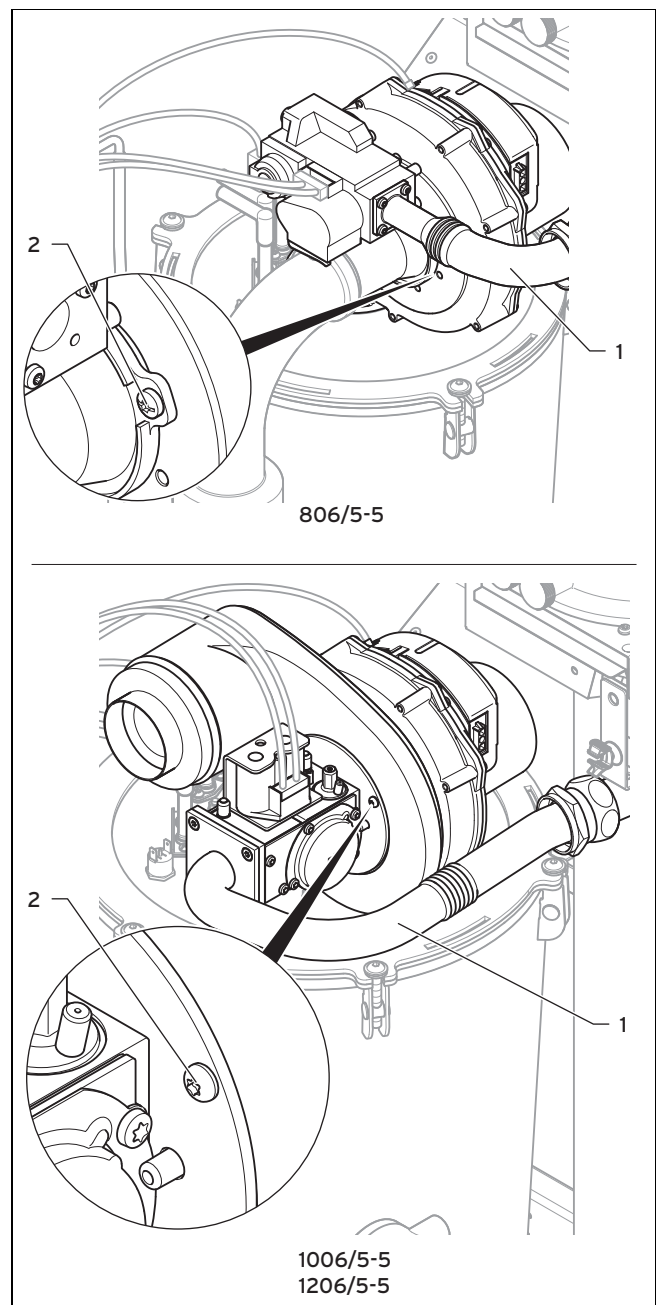

1. Remove the gas pipe (1) from the gas valve assembly.

2. Unscrew the screws **(2)** from the fan and remove the gas valve assembly from the fan.
3. Replace the defective component.
4. Install the gas valve assembly and the fan in the same position as before. Use new seals for this.
5. Tighten the screws **(2)** in a cross-wise pattern.

**Condition:** Applies for 80 kW


- Torque: 5.5 Nm

**Condition:** Applies for 100 kW and 120 kW

- Torque: 2 Nm

6. First, screw the gas pipe loosely onto the gas valve assembly. Only after completing the installation work should you tighten the screws for the flange fastening on the gas valve assembly.
7. After installing the new gas valve assembly, carry out a leak-tightness test (→ Page 35), and set the gas setting (→ Page 46).

### 13.11.2 Setting the O<sub>2</sub> or CO<sub>2</sub> content

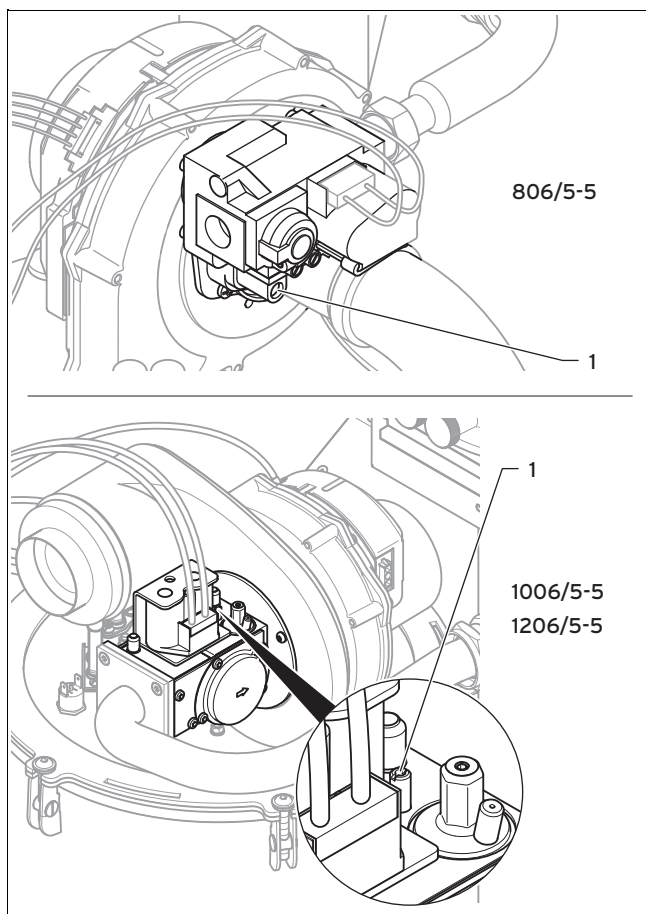

1. Check the O<sub>2</sub> or CO<sub>2</sub> content and the CO/CO<sub>2</sub> ratio. (→ Page 34)
  - ▽ The measured value does not correspond to the specifications.
2. Start check programme **P.02** (minimum load).
3. If necessary, break through the sealing sticker on the adjusting screw **(1)**.
4. Set the O<sub>2</sub> or CO<sub>2</sub> content by turning the adjusting screw only 1/8 of a turn at a time. After each adjustment, wait around 1 minute until the value has stabilised.

- Turning anti-clockwise: Higher O<sub>2</sub>/CO<sub>2</sub> content
- Turning clockwise: Lower O<sub>2</sub>/CO<sub>2</sub> content




#### Note

For products Vx 1006/5-5 and Vx 1206/5-5, after changing the direction of rotation, the CO<sub>2</sub> content only changes after approx. one turn of the adjusting screw (overcoming the adjustment hysteresis).

The adjusting screw must protrude only slightly from the housing.

5. Select **(Cancel)** once the adjustments have been made.
6. Start check programme **P.01** (full load).
7. Check the O<sub>2</sub> or CO<sub>2</sub> content and the CO/CO<sub>2</sub> ratio. (→ Page 34)
8. If an adjustment is not possible in the specified adjustment range, do not start up the product and inform customer service.
9. Install the front casing. (→ Page 18)

### 13.11.3 Replacing the burner

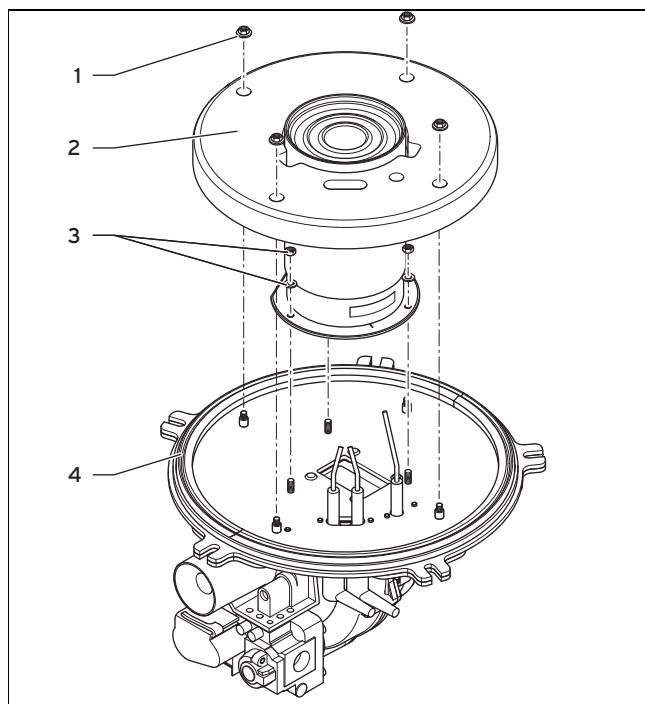

1. Remove the gas-air mixture unit. (→ Page 40)
2. Remove the ignition and monitoring electrode.
3. Remove the seal **(4)** from the burner door.
4. Undo the four nuts **(1)** that are used to secure the insulating mat.
5. Remove the insulating mat **(2)**.
6. Undo the nuts **(3)** on the burner.



#### Note

Use a suitable socket spanner (with extension) to ensure that the burner mat does not become damaged. You must not use burners that have a damaged mat.

7. Remove the burner. When doing so, hold the fan and the burner door securely.



8. Fit the new burner with a new seal.
9. Use all of the nuts and washers **(3)** to secure the burner.
  - Torque: 4 Nm



#### Note

Ensure that the screws are tightened slowly and repeatedly diagonally/crosswise using a torque spanner until the required 4 Nm is reached on all screws.

10. Use four nuts **(1)** to secure the insulating mat. Ensure that the insulating mat is touching the burner door and the cut-outs for the insulating mat lie above the cut-outs for the burner door.
  - Torque: 6 Nm
11. Install the ignition and monitoring electrodes. Use new seals for this.
  - Torque: 2.8 Nm
12. Install the gas-air mixture unit. (→ Page 43)
13. Check that the product functions correctly and check the leak-tightness (→ Page 35).

### 13.11.4 Replacing the insulating mat

If the safety cut-out on the burner door has been triggered, the insulating mat between the burner door and burner room may be damaged.

- Check and replace the insulating mat.




#### Note

To replace the insulating mat, proceed in the same way as when removing the burner. It is not necessary to remove the burner.

### 13.11.5 Replacing the fan

1. Remove the gas-air mixture unit. (→ Page 40)

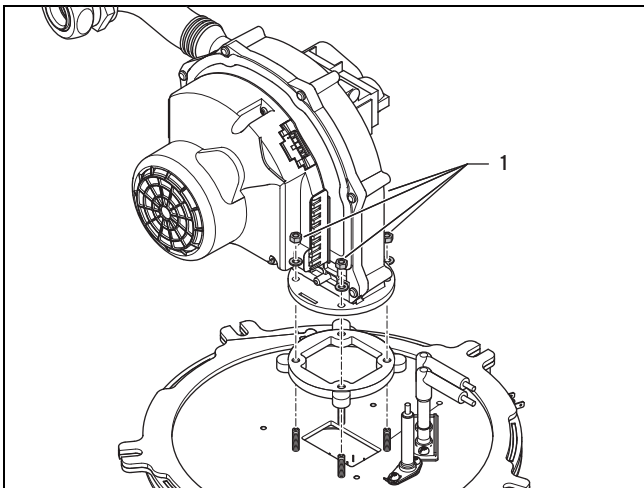

2. Undo the four nuts **(1)** on the fan.
3. Install the new fan on the burner door in the same orientation in which it was previously positioned.

Condition: Applies for 80 kW and 100 kW

- Torque: 3.5 Nm

Condition: Applies for 120 kW

- Torque: 6 Nm




#### Note


Tighten the screws on the fan evenly. The fan must not be at an angle.

### 13.11.6 Replacing the heat exchanger

1. Drain the product. (→ Page 44)
2. Remove the gas-air mixture unit. (→ Page 40)
3. Unscrew the flow and return line in the front area of the underside of the product.

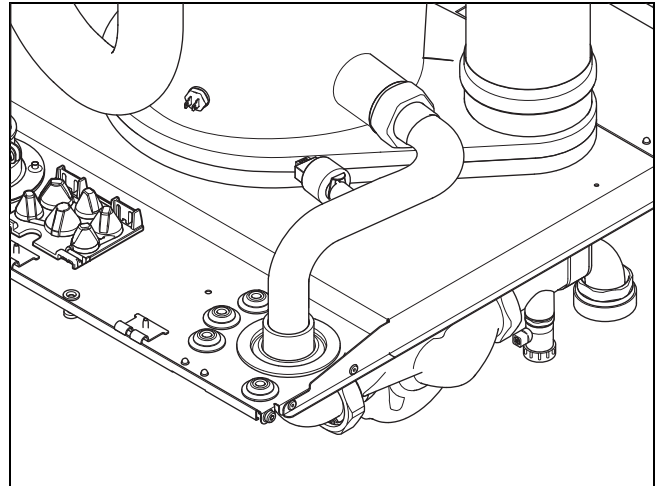

4. Release the sealing collars on the flow and return pipe from the floor plate.

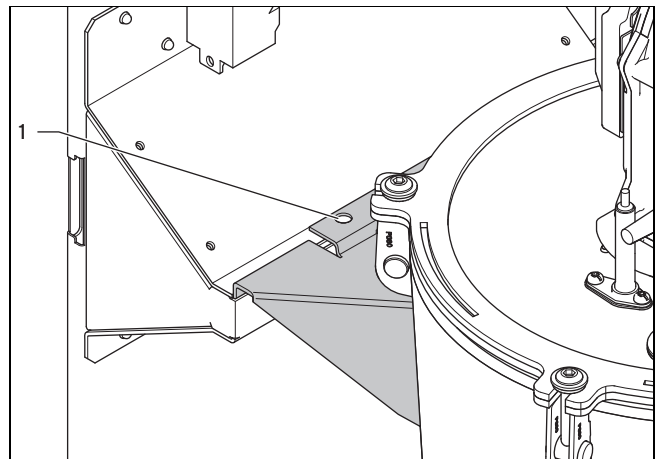

5. Remove the screws **(1)** from the heat exchanger bracket.
6. Lift the heat exchanger out of its bracket (this requires two people). The pipes can be used as handles for this.
7. Install the new heat exchanger in reverse order.
8. Install the gas-air mixture unit. (→ Page 43)
9. Fill and purge the product and, if necessary, the heating installation.

### 13.11.7 Replacing the PCB and/or the display



#### Caution.

#### Risk of material damage caused by incorrect repairs.

Using an incorrect replacement display may cause damage to the electronics.

- ▶ Before replacing, check that the correct replacement display is available.
- ▶ Never use another replacement display.



#### Note

If you are replacing only one component, the set parameters are transferred automatically. When the product is switched on, the new component adopts the previously set parameters from the unreplaced component.

1. Disconnect the unit from the mains power and secure it against being switched back on again.

**Condition:** Replacing the display or PCB

- ▶ Replace the PCB or display according to the set-up and installation instructions supplied.

**Condition:** Replacing the PCB and display at the same time

- ▶ Select the required language.
  - ◁ If you are replacing both components at the same time, the product switches directly to the menu to select the language after switching on. The factory-set language setting is English.
- ▶ Confirm your setting by pressing (OK).
  - ◁ You are automatically taken to **D.093** to set the device specific number.
- ▶ In accordance with the following table, set the correct Device Specific Number (DSN) as per the gas family used:

#### Device Specific Numbers (DSN - Device Specific Number)

|                                           | Natural gas | Liquefied petroleum gas |
|-------------------------------------------|-------------|-------------------------|
| VU GB 806/5-5 (H-GB)<br>ecoTEC plus 806   | 82          | 88                      |
| VU GB 1006/5-5 (H-GB)<br>ecoTEC plus 1006 | 81          | 87                      |
| VU GB 1206/5-5 (H-GB)<br>ecoTEC plus 1206 | 80          | 86                      |

- ▶ Confirm your setting.
  - ◁ The electronics are now set to the product type and the parameters of all diagnostics codes are set to factory settings.
  - ◁ The display automatically restarts with the installation assistant.
- ▶ Make the system-specific settings.

### 13.12 Completing repair work

1. Establish the power supply.
2. Switch the product back on if this has not yet been done. (→ Page 29)
3. Install the front casing.
4. Open all service valves and the gas stopcock.

### 13.13 Checking the product for leak-tightness

- ▶ Check that the product is leak-tight. (→ Page 35)

## 14 Decommissioning

### 14.1 Temporarily decommissioning the product

- ▶ Press the on/off button.
  - ◁ The display goes out.
- ▶ Close the gas stopcock.
- ▶ On products with a connected domestic hot water cylinder, you must also close the cold-water isolation valve.

### 14.2 Permanently decommissioning the product

- ▶ Press the on/off button.
  - ◁ The display goes out.
- ▶ Disconnect the product from the power grid.
- ▶ Close the gas stopcock.
- ▶ Close the cold-water isolation valve.
- ▶ Drain the product. (→ Page 44)

## 15 Disposing of the packaging

- ▶ Dispose of the packaging correctly.
- ▶ Observe all relevant regulations.
- ▶ For detailed information refer to [www.vaillant.co.uk](http://www.vaillant.co.uk).

## Appendix


### A Inspection and maintenance work

The table below lists the manufacturer requirements with respect to minimum inspection and maintenance intervals. If national regulations and directives require shorter inspection and maintenance intervals, you should observe these instead of the intervals listed. Each time inspection and maintenance work is carried out, carry out the required preparatory and completion work.

| #  | Maintenance work                                                                                                                                                                                                                              | Interval                                        |  |
|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------|
| 1  | Record all of the analysis results in the Benchmark Checklist in these instructions                                                                                                                                                           | Annually                                        |                                                                                     |
| 2  | Ask the end user whether any significant problems occur when operating the product                                                                                                                                                            | Annually                                        |                                                                                     |
| 3  | Use the diagnostics system to check the product's fault history                                                                                                                                                                               | Annually                                        |                                                                                     |
| 4  | Check the air/flue pipe for leak-tightness and correct fastening. Make sure that it is not blocked or damaged and has been installed in accordance with the relevant set-up instructions                                                      | Annually                                        |                                                                                     |
| 5  | Check that the unit has been installed correctly and the connections have been secured                                                                                                                                                        | Annually                                        |                                                                                     |
| 6  | Check that the condensate pipe is in good condition, that it is leak-tight and that the drain is correct                                                                                                                                      | Annually                                        |                                                                                     |
| 7  | Check whether all of the externally routed condensate pipes are dimensioned correctly and have been insulated sufficiently (frost protection)                                                                                                 | Annually                                        |                                                                                     |
| 8  | Check the gas connection pressure at maximum heat input. If the gas connection pressure is not within the correct range, carry out maintenance work                                                                                           | Annually                                        |                                                                                     |
| 9  | Check the general condition of the product and, if required, eliminate any faults that are found                                                                                                                                              | Annually                                        |                                                                                     |
| 10 | Carry out the combustion analysis: Measure the CO content, CO <sub>2</sub> content and the CO/CO <sub>2</sub> ratio and readjust this if necessary. Logging the measurement                                                                   | Annually                                        |                                                                                     |
| 11 | Check the product's recirculation at the supply air test point on the air/flue pipe. If required, inspect the entire air/flue system and, if necessary, correct the fault                                                                     | Annually                                        |                                                                                     |
| 12 | Disconnect the product from the electrical installation                                                                                                                                                                                       | Annually                                        |                                                                                     |
| 13 | Check and, if required, correct the electrical installation                                                                                                                                                                                   | Annually                                        |                                                                                     |
| 14 | Removing dirt from the product and the vacuum chamber                                                                                                                                                                                         | Annually                                        |                                                                                     |
| 15 | Visually check the heat cell to ascertain its condition and detect any corrosion, rust or damage, and carry out maintenance work, if required                                                                                                 | Annually                                        |                                                                                     |
| 16 | Check that the gas stopcock and service valves function correctly                                                                                                                                                                             | Annually                                        |                                                                                     |
| 17 | Check the quality of the heating water: Clarity (clouding), correct inhibitor and pH value. Log the values in a system book. If required, use water treatment to correct the water hardness                                                   | Annually                                        |                                                                                     |
| 18 | Check and, if required, correct the expansion vessel's pre-charge pressure                                                                                                                                                                    | At least every 2 years                          |                                                                                     |
| 19 | Removing the gas-air mixture unit                                                                                                                                                                                                             | At least every 2 years                          | 40                                                                                  |
| 20 | Check the burner for damage and replace it if necessary                                                                                                                                                                                       | At least every 2 years                          |                                                                                     |
| 21 | Check all seals and the insulating mat in the combustion area. Replace the seals or insulating mat if they are damaged. Replace the burner door seal after each time it is opened and, accordingly, each time maintenance work is carried out | At least every 2 years                          |                                                                                     |
| 22 | Cleaning the heat exchanger                                                                                                                                                                                                                   | At least every 2 years                          | 42                                                                                  |
| 23 | Cleaning the condensate trap                                                                                                                                                                                                                  | Annually                                        | 43                                                                                  |
| 24 | Filling the condensate trap                                                                                                                                                                                                                   | Annually                                        | 31                                                                                  |
| 25 | Installing the gas-air mixture unit                                                                                                                                                                                                           | At least every 2 years                          | 43                                                                                  |
| 26 | Replace the ignition and ionisation electrodes and the associated seals                                                                                                                                                                       | At least every 2 years                          |                                                                                     |
| 27 | Flue non-return flaps for cascades: Check that the flue non-return flap is working properly. If required, clean the inside and outside of the housing, as well as the shut-off disc and the shaft, if fitted                                  | At least every 2 years                          |                                                                                     |
| 28 | Reassemble the product                                                                                                                                                                                                                        | After each time maintenance work is carried out |                                                                                     |
| 29 | Opening the service valves                                                                                                                                                                                                                    | Annually                                        |                                                                                     |


| #  | Maintenance work                                                                                                                                        | Interval               |  |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------|
| 30 | Fill up the product/heating installation to 1.0–4.5 bar (depending on the static height of the heating installation) and start the purge programme P.00 | At least every 2 years |                                                                                    |
| 31 | Completing inspection and maintenance work                                                                                                              | Annually               | 44                                                                                 |
| 32 | Starting a test operation after maintenance work                                                                                                        | Annually               |                                                                                    |
| 33 | Visually check the ignition and burner behaviour                                                                                                        | Annually               |                                                                                    |
| 34 | Checking the CO/CO <sub>2</sub> content following maintenance work                                                                                      | Annually               |                                                                                    |
| 35 | Check the product for gas, flue gas, water and condensate leaks                                                                                         | Annually               |                                                                                    |

## B Installer level menu structure – Overview

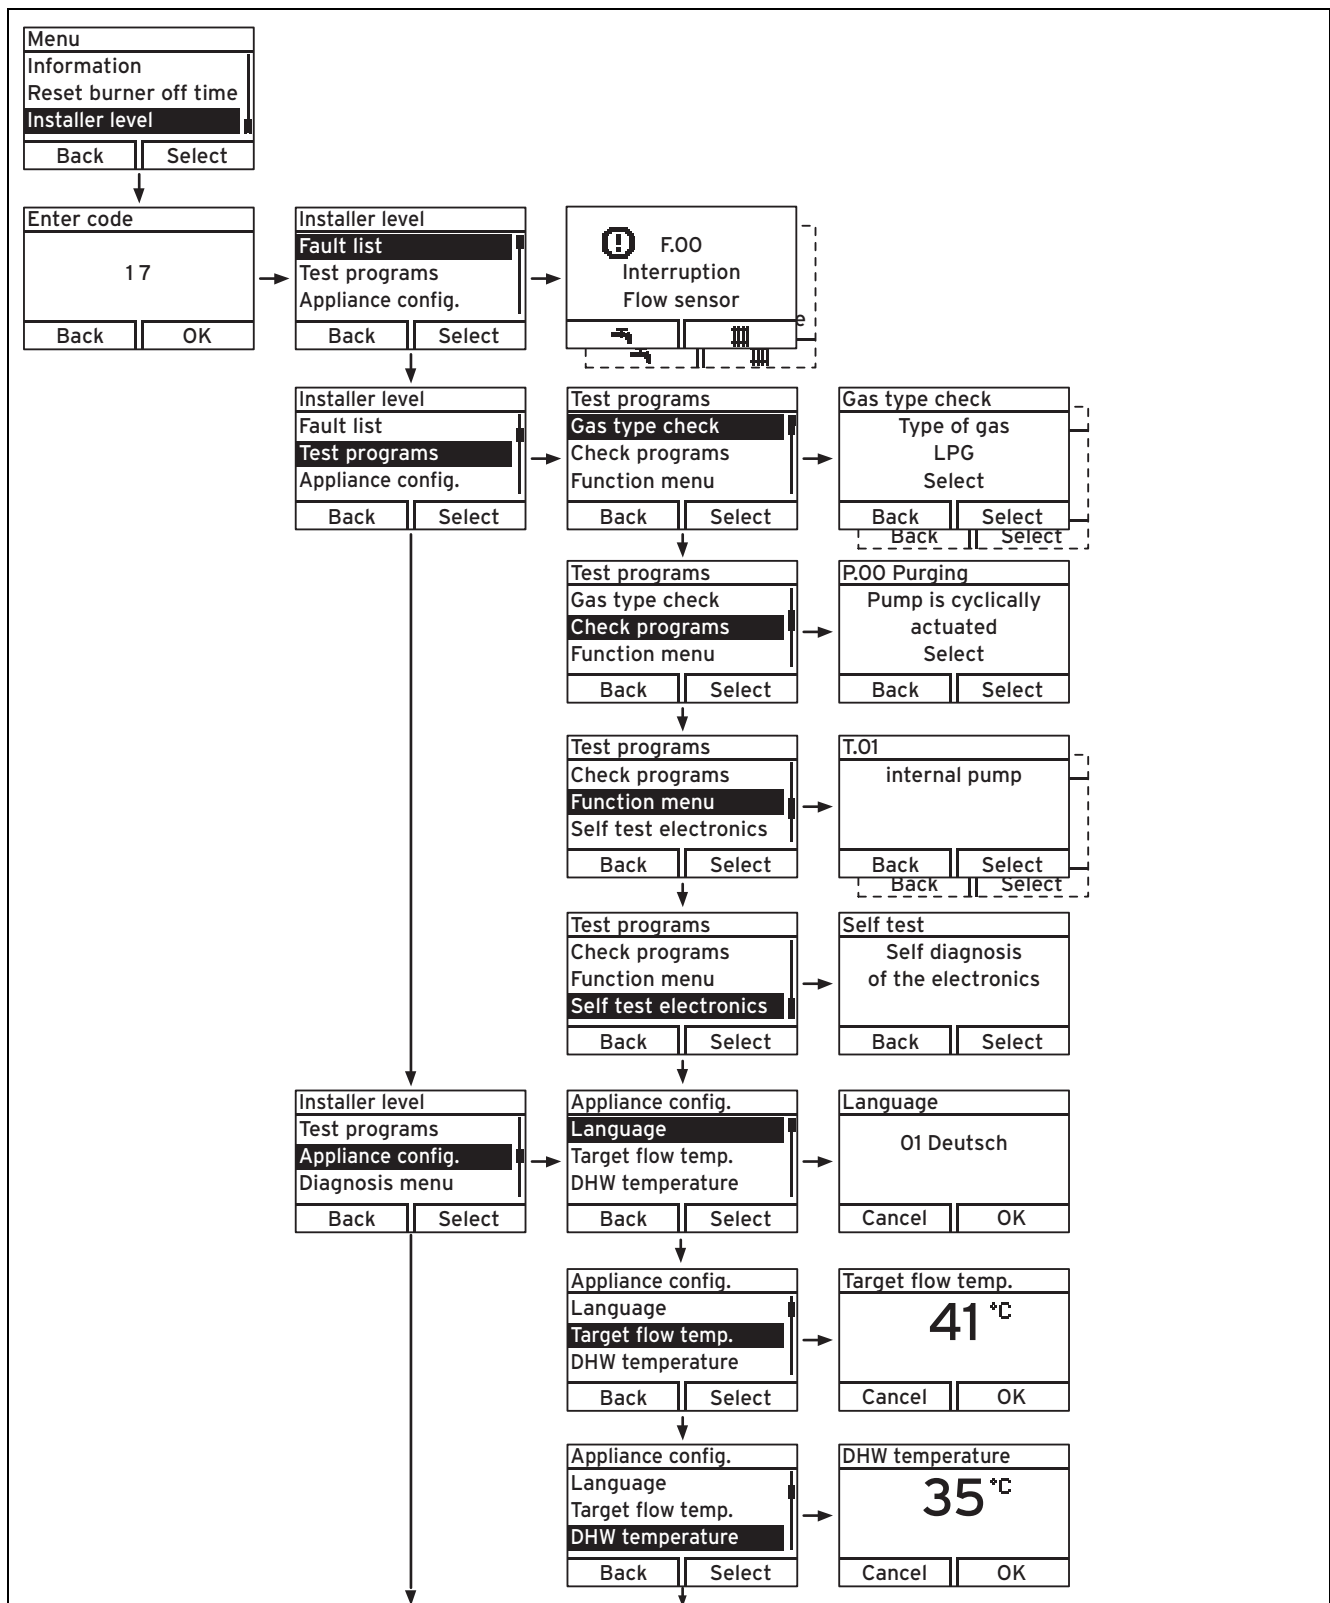

### Note

The menu entry **Menu → Installer level → Test programmes → Gas family check** is not working.

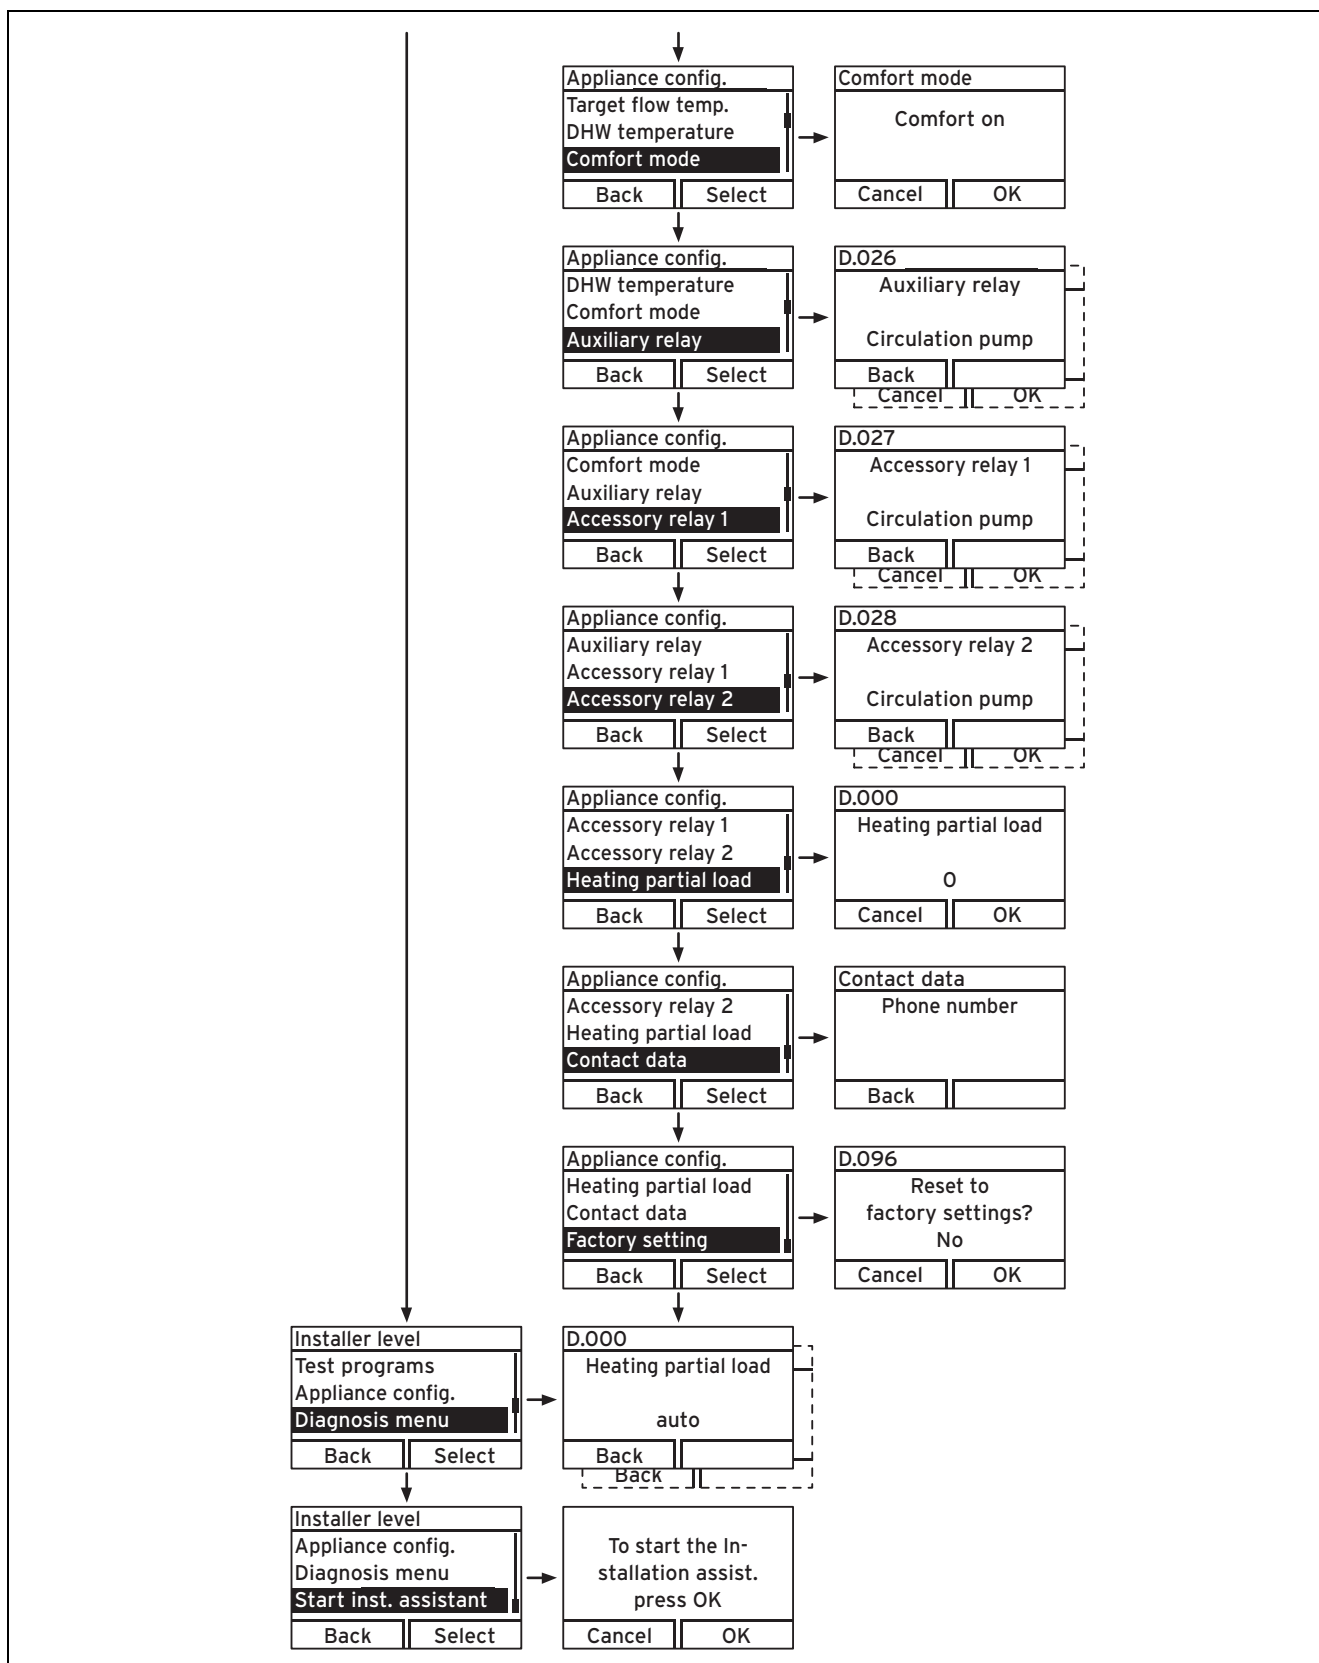



## C Overview of diagnostics codes

| Code  | Parameter                                                                            | Values or explanations                                                                                                                                                                                                                                                                                       | Factory setting      | Own setting    |
|-------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------|
| D.000 | Partial heat load                                                                    | Adjustable partial heat load in kW<br>Auto: Product automatically adjusts max. partial load to current system demand                                                                                                                                                                                         | Auto                 |                |
| D.001 | Overrun time of internal heating pump for heating mode                               | 2 to 60 min                                                                                                                                                                                                                                                                                                  | 5 min                |                |
| D.002 | Max. burner anti-cycling time heating at 20 °C flow temperature                      | 2 to 60 min                                                                                                                                                                                                                                                                                                  | 20 min               |                |
| D.005 | Target flow temperature value (or target return value)                               | In °C, max. of the value set in D.071, limited by an eBUS control if connected                                                                                                                                                                                                                               |                      | Not adjustable |
| D.006 | Domestic hot water temperature target value                                          | 35 to 65 °C                                                                                                                                                                                                                                                                                                  |                      | Not adjustable |
| D.007 | Warm start temperature target value                                                  | 40 to 65 °C<br>Frost protection is at 15 °C, then 40 to 70 °C (max. temperature can be adjusted under D.020)                                                                                                                                                                                                 |                      | Not adjustable |
| D.010 | Heating pump status of the pump group                                                | 0 = Off<br>1 = On                                                                                                                                                                                                                                                                                            |                      | Not adjustable |
| D.011 | Status of external heating pump                                                      | 0 = Off<br>1-100 = On                                                                                                                                                                                                                                                                                        |                      | Not adjustable |
| D.014 | Pump speed target value (high-efficiency pump)                                       | Target heating pump value in %<br>0 = Auto<br>1 = 53<br>2 = 60<br>3 = 70<br>4 = 85<br>5 = 100                                                                                                                                                                                                                | 4 = 85               |                |
| D.016 | 24 V DC room thermostat open/closed                                                  | 0 = Room thermostat open (no heating mode)<br>1 = Room thermostat closed (heating mode)                                                                                                                                                                                                                      |                      | Not adjustable |
| D.017 | Heating flow/return temperature control changeover                                   | Control type:<br>0 = Flow, 1 = Return                                                                                                                                                                                                                                                                        | 0 = Flow             |                |
| D.018 | Pump mode setting                                                                    | 1 = Comfort (continuously operating pump)<br>3 = Eco (intermittently operating pump)                                                                                                                                                                                                                         | 1 = Comfort          |                |
| D.022 | Domestic hot water requirement via C1/C2, internal domestic hot water control system | 0 = Off<br>1 = On                                                                                                                                                                                                                                                                                            |                      | Not adjustable |
| D.023 | Summer/winter mode (heating off/on)                                                  | 0 = Heating off (Summer mode)<br>1 = Heating on                                                                                                                                                                                                                                                              |                      | Not adjustable |
| D.025 | Domestic hot water generation enabled by eBUS control                                | 0 = Off<br>1 = On                                                                                                                                                                                                                                                                                            |                      | Not adjustable |
| D.026 | Additional relay actuation                                                           | 1 = Circulation pump<br>2 = External pump<br>3 = Cylinder charging pump<br>4 = Extraction hood<br>5 = External solenoid valve<br>6 = External fault message<br>7 = Solar pump (not active)<br>8 = eBUS remote control (not active)<br>9 = Anti-legionella pump (not active)<br>10 = Solar valve (not active) | 2 = External pump    |                |
| D.027 | Switching of relay 1 on the VR 40 "2 in 7" multi-functional module                   | 1 = Circulation pump<br>2 = External pump<br>3 = Cylinder charging pump<br>4 = Extraction hood<br>5 = External solenoid valve<br>6 = External fault message<br>7 = Solar pump (not active)<br>8 = eBUS remote control (not active)<br>9 = Anti-legionella pump (not active)<br>10 = Solar valve (not active) | 1 = Circulation pump |                |

| Code  | Parameter                                                          | Values or explanations                                                                                                                                                                                                                                                                                       | Factory setting                 | Own setting    |
|-------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------|
| D.028 | Switching of relay 2 on the VR 40 "2 in 7" multi-functional module | 1 = Circulation pump<br>2 = External pump<br>3 = Cylinder charging pump<br>4 = Extraction hood<br>5 = External solenoid valve<br>6 = External fault message<br>7 = Solar pump (not active)<br>8 = eBUS remote control (not active)<br>9 = Anti-legionella pump (not active)<br>10 = Solar valve (not active) | 2 = External pump               |                |
| D.033 | Fan speed target value                                             | In rpm                                                                                                                                                                                                                                                                                                       |                                 | Not adjustable |
| D.034 | Fan speed actual value                                             | In rpm                                                                                                                                                                                                                                                                                                       |                                 | Not adjustable |
| D.039 | Solar feed temperature                                             | Actual value in °C                                                                                                                                                                                                                                                                                           |                                 | Not adjustable |
| D.040 | Flow temperature                                                   | Actual value in °C                                                                                                                                                                                                                                                                                           |                                 | Not adjustable |
| D.041 | Return temperature                                                 | Actual value in °C                                                                                                                                                                                                                                                                                           |                                 | Not adjustable |
| D.044 | Digitised ionisation value                                         | Display field 0 to 1020<br>> 800 no flame<br>< 400 good flame                                                                                                                                                                                                                                                |                                 | Not adjustable |
| D.046 | Pump type                                                          | 0 = Relay with disable facility<br>1 = PWM with disable facility                                                                                                                                                                                                                                             | 0 = Relay with disable facility |                |
| D.047 | Outdoor temperature (with Vaillant weather-compensated control)    | Actual value in °C                                                                                                                                                                                                                                                                                           |                                 | Not adjustable |
| D.050 | Offset for minimum speed                                           | In rpm, adjustment range: 0 to 3000                                                                                                                                                                                                                                                                          | Nominal value set in factory    |                |
| D.051 | Offset for maximum speed                                           | In rpm, adjustment range: -990 to 0                                                                                                                                                                                                                                                                          | Nominal value set in factory    |                |
| D.060 | Number of temperature cut-out shutdowns                            | Number of shutdowns                                                                                                                                                                                                                                                                                          |                                 | Not adjustable |
| D.061 | Number of flame sequence control faults                            | Number of unsuccessful ignitions in the last attempt                                                                                                                                                                                                                                                         |                                 | Not adjustable |
| D.064 | Average ignition time                                              | In seconds                                                                                                                                                                                                                                                                                                   |                                 | Not adjustable |
| D.065 | Maximum ignition time                                              | In seconds                                                                                                                                                                                                                                                                                                   |                                 | Not adjustable |
| D.067 | Remaining burner anti-cycling time                                 | In minutes                                                                                                                                                                                                                                                                                                   |                                 | Not adjustable |
| D.068 | Unsuccessful ignitions at 1st attempt                              | Number of unsuccessful ignitions                                                                                                                                                                                                                                                                             |                                 | Not adjustable |
| D.069 | Unsuccessful ignitions at 2nd attempt                              | Number of unsuccessful ignitions                                                                                                                                                                                                                                                                             |                                 | Not adjustable |
| D.071 | Target value maximum heating flow temperature                      | 40 to 85 °C                                                                                                                                                                                                                                                                                                  | 75 °C                           |                |
| D.072 | Internal pump overrun time after cylinder charging                 | Adjustable from 0 to 10 mins                                                                                                                                                                                                                                                                                 | 2 min                           |                |
| D.076 | Device Specific Number (DSN)                                       | VU 806 = natural gas: 82, liquefied petroleum gas: 88<br>VU 1006 = natural gas: 81, liquefied petroleum gas: 87<br>VU 1206 = natural gas: 80, liquefied petroleum gas: 86                                                                                                                                    |                                 | Not adjustable |
| D.077 | Limit on cylinder charging output in kW                            | Adjustable cylinder charging output in kW                                                                                                                                                                                                                                                                    |                                 |                |
| D.080 | Operating hours, heating                                           | In hours (h)                                                                                                                                                                                                                                                                                                 |                                 | Not adjustable |
| D.081 | Operating hours, domestic hot water generation                     | In hours (h)                                                                                                                                                                                                                                                                                                 |                                 | Not adjustable |

| Code  | Parameter                                                         | Values or explanations                                                  | Factory setting | Own setting    |
|-------|-------------------------------------------------------------------|-------------------------------------------------------------------------|-----------------|----------------|
| D.082 | Number of burner start-ups in heating mode                        | Number of burner start-ups                                              |                 | Not adjustable |
| D.083 | Number of burner starts in domestic hot water mode                | Number of burner start-ups                                              |                 | Not adjustable |
| D.084 | Maintenance indicator: Number of hours until the next maintenance | Adjustment range: 0 to 3000 hrs and "---" for deactivated               | ,"---           |                |
| D.090 | Status of digital control                                         | Recognised, not recognised                                              |                 | Not adjustable |
| D.091 | Status of DCF with outdoor temperature sensor connected           | No reception<br>Reception<br>Synchronised<br>Valid                      |                 | Not adjustable |
| D.093 | Device Specific Number (DSN) setting                              | Adjustment range: 0 to 99                                               |                 |                |
| D.094 | Delete fault history                                              | Delete fault list<br>0 = No<br>1 = Yes                                  |                 |                |
| D.095 | Software version of the eBUS components                           | 1. PCB (BMU)<br>2. Display (AI)<br>4. HBI/VR34                          |                 | Not adjustable |
| D.096 | Factory setting                                                   | Reset all adjustable parameters to factory setting<br>0 = No<br>1 = Yes |                 |                |

## D Status codes – Overview

| Status code   | Meaning                                                                  |
|---------------|--------------------------------------------------------------------------|
| Heating mode  |                                                                          |
| S.00          | Heating: No heat demand                                                  |
| S.01          | Heating mode: Fan start-up                                               |
| S.02          | Heating mode: Pump prerun                                                |
| S.03          | Heating mode: Ignition                                                   |
| S.04          | Heating mode: Burner on                                                  |
| S.05          | Heating mode: Pump/fan overrun                                           |
| S.06          | Heating mode: Fan overrun                                                |
| S.07          | Heating mode: Pump overrun                                               |
| S.08          | Heating mode: Remaining anti-cycling time                                |
| S.09          | Heating mode: Measuring programme                                        |
| S.20          | Domestic hot water requirement                                           |
| S.21          | DHW mode: Fan start-up                                                   |
| S.22          | DHW mode: Pump prerun                                                    |
| S.23          | DHW mode: Ignition                                                       |
| S.24          | DHW mode: Burner on                                                      |
| S.25          | DHW mode: Pump/fan overrun                                               |
| S.26          | DHW mode: Fan overrun                                                    |
| S.27          | Domestic hot water mode: Pump overrun                                    |
| S.28          | DHW mode: Burner anti-cycling time                                       |
| Special cases |                                                                          |
| S.30          | Room thermostat (RT) is blocking heating mode                            |
| S.31          | Summer mode active or no heat requirement from eBUS control              |
| S.32          | Waiting period because of fan speed deviation                            |
| S.34          | Frost protection mode active                                             |
| S.36          | Target value of the eBUS control is < 20 °C and is blocking heating mode |
| S.37          | Fan waiting period: Fan failure in operation                             |

| Status code | Meaning                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| S.39        | "Burner off contact" has triggered (e.g. surface-mounted thermostat or condensate pump)                                                                   |
| S.40        | Comfort protection mode is active: Product running with limited heating comfort                                                                           |
| S.41        | Water pressure > 0.6 MPa (6 bar)                                                                                                                          |
| S.42        | Flue non-return flap response blocks burner operation (only in conjunction with accessory VR40) or condensate pump defective; heat requirement is blocked |
| S.44        | "Return temperature sensor" comfort protection mode is active; product running with limited heating comfort                                               |
| S.46        | "Flame lost at min. output" comfort protection mode is active; product running with limited heating comfort                                               |
| S.47        | "Flame lost at max. output" comfort protection mode is active; product running with limited heating comfort                                               |
| S.48        | "Deviating fan speed" comfort protection mode is active; product running with limited heating comfort                                                     |
| S.53        | Product is within the waiting period of the modulation block/operating block function as a result of water deficiency (flow/return spread too large)      |
| S.54        | Product is within the waiting period of the operating blocking function as a result of water deficiency (temperature gradient)                            |
| S.96        | Return sensor test running, heating demands are blocked.                                                                                                  |
| S.97        | Water pressure sensor test running, heating demands are blocked.                                                                                          |
| S.98        | Flow/return sensor test running, heating demands are blocked.                                                                                             |


## E Overview of fault codes

| Code | Meaning                                            | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F.00 | Flow temperature sensor interruption               | NTC plug not plugged in or has come loose, multiple plug on the PCB not plugged in correctly, interruption in wiring harness, NTC defective                                                                                                                                                                                                                                                                                                                                                                                            |
| F.01 | Return temperature sensor interruption             | NTC plug not plugged in or has come loose, multiple plug on the PCB not plugged in correctly, interruption in wiring harness, NTC defective                                                                                                                                                                                                                                                                                                                                                                                            |
| F.10 | Flow temperature sensor short circuit              | NTC defective, short circuit in wiring harness, cable/housing                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| F.11 | Return temperature sensor short circuit            | NTC defective, short circuit in wiring harness, cable/housing                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| F.20 | Safety shutdown: Temperature cut-out               | Incorrect earth connection between wiring harness and product, flow or return NTC defective (loose connection), stray spark via ignition cable, ignition plug or ignition electrode, flue gas temperature too high                                                                                                                                                                                                                                                                                                                     |
| F.22 | Safety shutdown: Water deficiency                  | No or insufficient water in the product, water pressure sensor defective, cable to pump or water pressure sensor loose/not connected/defective                                                                                                                                                                                                                                                                                                                                                                                         |
| F.23 | Safety shutdown: Temperature spread too great      | Pump blocked, insufficient pump output, air in product, flow and return NTC connected the wrong way round                                                                                                                                                                                                                                                                                                                                                                                                                              |
| F.24 | Safety shutdown: Temperature rise too fast         | Pump blocked, insufficient pump output, air in product, system pressure too low, non-return valve blocked/incorrectly installed                                                                                                                                                                                                                                                                                                                                                                                                        |
| F.25 | Safety shutdown: Flue gas temperature too high     | Break in plug connection for optional flue gas safety cut-out (SCO), break in wiring harness                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| F.27 | Safety shutdown: Flame simulation                  | Moisture on the electronics, electronics (flame monitor) defective, gas solenoid valve leaking                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| F.28 | Failure during start-up: Ignition unsuccessful     | Gas meter defective or gas pressure switch has triggered, air in gas, gas flow pressure too low, thermal cut-out has triggered, condensate route blocked, incorrect gas injector, incorrect spare gas valve assembly, fault on the gas valve assembly, multiple plug on PCB incorrectly plugged in, break in wiring harness, ignition system (ignition transformer, ignition cable, ignition plug, ignition electrode) defective, ionisation flow interrupted (cable, electrode), incorrect earthing of product, electronics defective |
| F.29 | Failure during operation: Re-ignition unsuccessful | Gas supply temporarily stopped, flue gas recirculation, condensate route blocked, defective earthing of product, ignition transformer has spark failure                                                                                                                                                                                                                                                                                                                                                                                |
| F.32 | Fan fault                                          | Plug on fan not correctly plugged in, multiple plug on PCB not correctly plugged in, break in wiring harness, fan blocked, Hall sensor defective, electronics defective                                                                                                                                                                                                                                                                                                                                                                |
| F.34 | Safety shutdown: Pressure monitoring               | Flue pressure switch: Cable break, blocked flue gas route Water pressure switch: Hydraulic leakage, air in the heating circuit                                                                                                                                                                                                                                                                                                                                                                                                         |
| F.35 | Fault: Air/flue pipe                               | Air/flue pipe blocked                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| F.49 | Fault: eBUS                                        | Short circuit on eBUS, eBUS overload or two power supplies with different polarities on the eBUS                                                                                                                                                                                                                                                                                                                                                                                                                                       |

| Code                | Meaning                                                                  | Cause                                                                                                                                                                                                                                                                                          |
|---------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F.61                | Fault: Gas valve assembly actuation                                      | <ul style="list-style-type: none"> <li>– Short circuit/short to earth in wiring harness for the gas valve assembly</li> <li>– Gas valve assembly defective (coils shorted to earth)</li> <li>– Electronics defective</li> </ul>                                                                |
| F.62                | Fault: Gas valve assembly switch-off delay                               | <ul style="list-style-type: none"> <li>– Delayed shutdown of gas valve assembly</li> <li>– Delayed extinguishing of flame signal</li> <li>– Gas valve assembly leaking</li> <li>– Electronics defective</li> </ul>                                                                             |
| F.63                | Fault: EEPROM                                                            | Electronics defective                                                                                                                                                                                                                                                                          |
| F.64                | Fault: Electronics/NTC                                                   | Flow or return NTC short circuited, electronics defective                                                                                                                                                                                                                                      |
| F.65                | Fault: Electronics temp.                                                 | Electronics overheating due to external influences, electronics defective                                                                                                                                                                                                                      |
| F.67                | Fault: Electronics/flame                                                 | Implausible flame signal, electronics defective                                                                                                                                                                                                                                                |
| F.68                | Fault: Unstable flame signal                                             | Air in gas, gas flow pressure too low, incorrect air ratio, condensate route blocked, incorrect gas injector, ionisation flow interruption (cable, electrode), flue gas recirculation, condensate route                                                                                        |
| F.70                | Invalid device specific number (DSN)                                     | If spare parts were integrated: Display and PCB replaced at the same time and Device Specific Number not reset; incorrect wiring harness; liquefied petroleum gas coding resistor and DSN do not match                                                                                         |
| F.73                | Water pressure sensor signal in the wrong range (too low)                | Interruption/short circuit of water pressure sensor, interruption/short circuit to GND in supply line to water pressure sensor or water pressure sensor defective                                                                                                                              |
| F.74                | Water pressure sensor signal outside correct range (too high)            | Line to water pressure sensor has a short circuit to 5 V/24 V or internal fault in the water pressure sensor                                                                                                                                                                                   |
| F.75                | Fault: No pressure change detection when starting pump                   | Water pressure sensor and/or pump defective, air in the heating installation, insufficient water in the product; check adjustable bypass, connect external expansion vessel to the return                                                                                                      |
| F.76                | Overheating protection on primary heat exchanger has responded           | Cable or cable connections for safety fuse in primary heat exchanger or primary heat exchanger defective                                                                                                                                                                                       |
| F.77                | Fault: Flue non-return flap/condensate pump                              | No response from flue non-return flap or condensate pump defective                                                                                                                                                                                                                             |
| Communication fault | No communication with the PCB                                            | Communication fault between the display and the PCB in the electronics box                                                                                                                                                                                                                     |
| F.83                | Fault: Flow and/or return temperature sensor temperature change          | <p>When the burner starts, the temperature change registered at the flow and/or return temperature sensor is non-existent or too small</p> <ul style="list-style-type: none"> <li>– Insufficient water in product</li> <li>– Flow/return temperature sensor not installed correctly</li> </ul> |
| F.84                | Fault: Flow/return temperature sensor temperature difference implausible | <p>Flow/return temperature sensors returning implausible values</p> <ul style="list-style-type: none"> <li>– Flow/return temperature sensor not installed correctly</li> </ul>                                                                                                                 |

## F Wiring diagram

### F.1 Wiring diagram

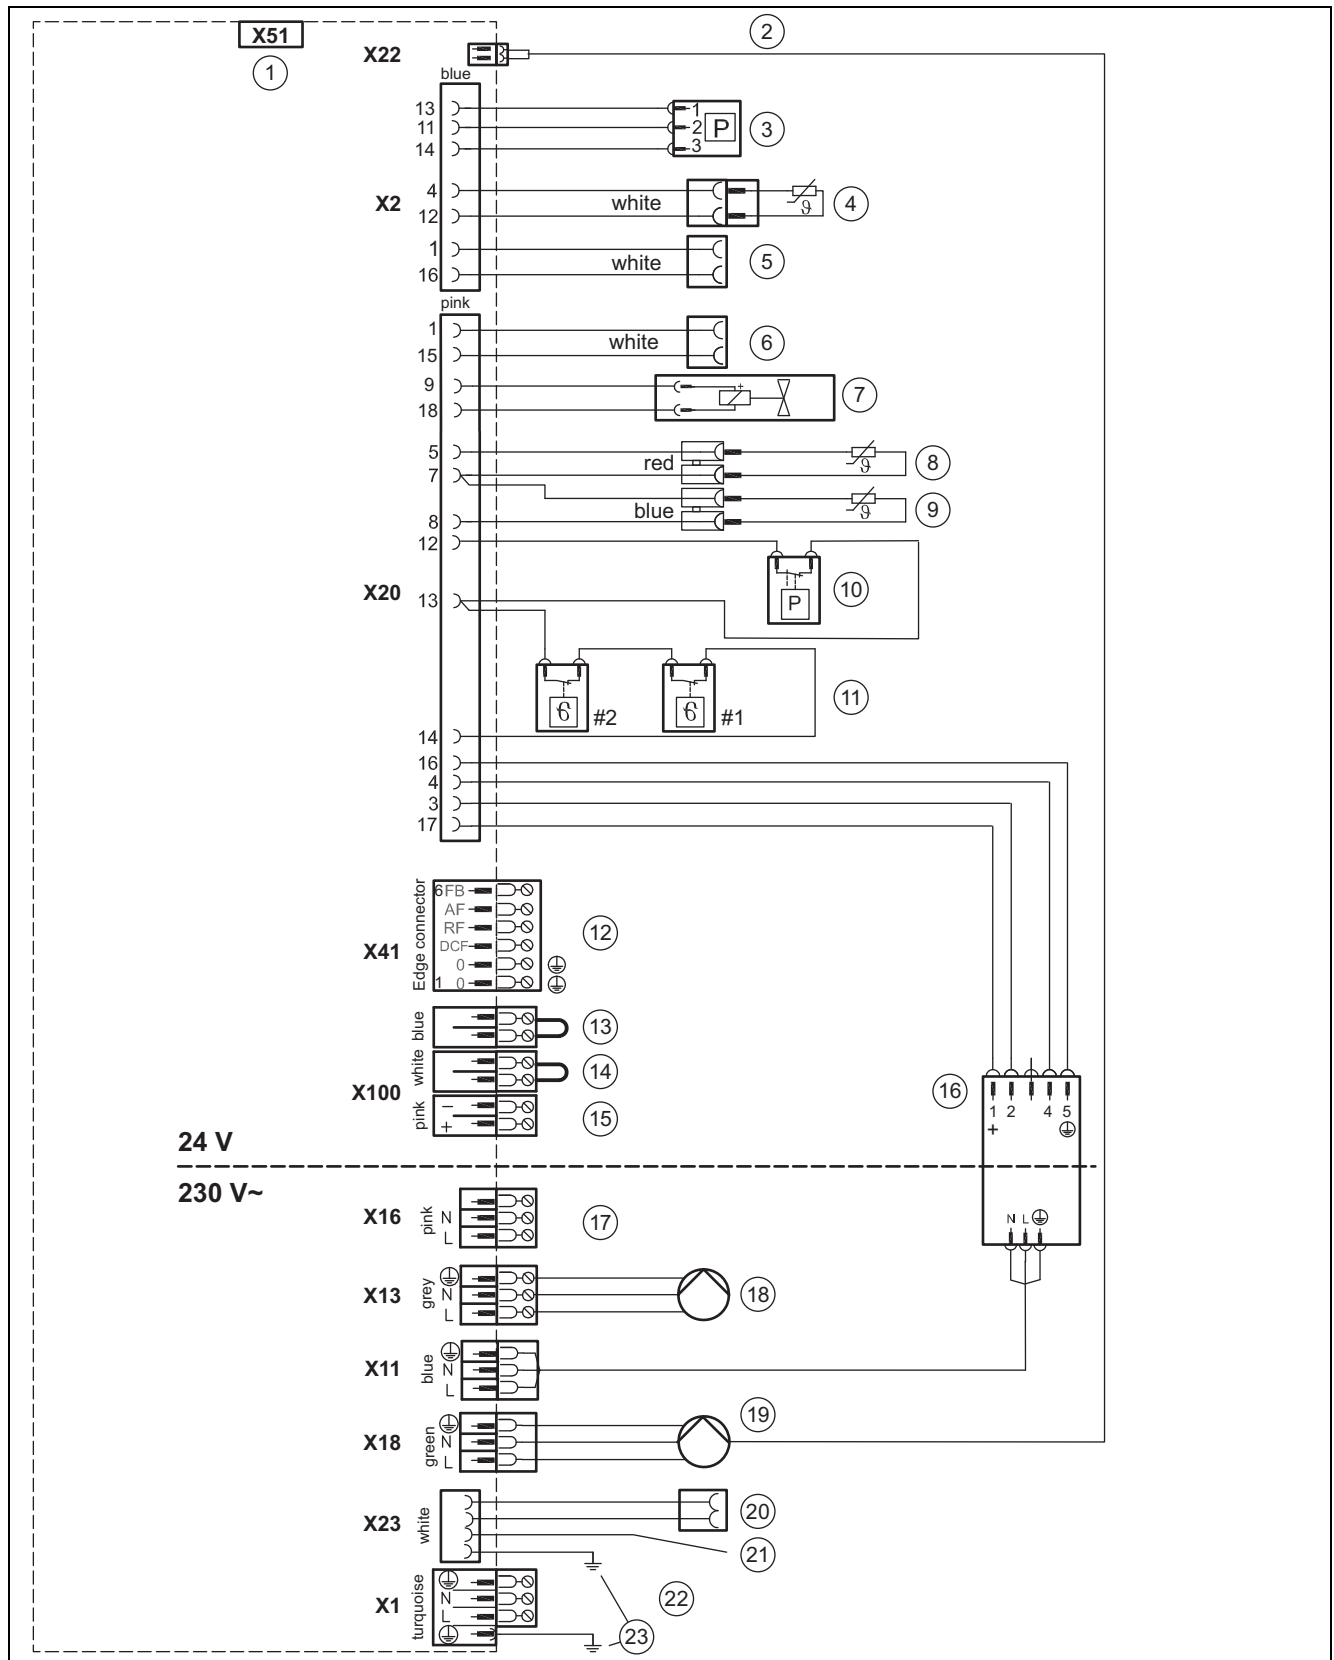

- |   |                                        |    |                            |
|---|----------------------------------------|----|----------------------------|
| 1 | Display connection                     | 6  | Coding resistor (optional) |
| 2 | PWM signal pump                        | 7  | Gas valve                  |
| 3 | Water pressure sensor                  | 8  | Flow temperature sensor    |
| 4 | Cylinder temperature sensor (optional) | 9  | Return temperature sensor  |
| 5 | Cylinder contact C1/C2                 | 10 | Flue pressure switch       |

|    |                                                                                                                                    |    |                                       |
|----|------------------------------------------------------------------------------------------------------------------------------------|----|---------------------------------------|
| 11 | Safety cut-out                                                                                                                     | 17 | Accessory output (selected via D.026) |
| 12 | 1, 2: Earth, 3: DCF port, 4: Flow temperature sensor (optional), 5: Outdoor temperature sensor, 6: Circulation pump remote control | 18 | Cylinder charging pump                |
| 13 | Surface-mounted thermostat/Burner off                                                                                              | 19 | Internal pump                         |
| 14 | Ext. room temperature control 3–4 (contact, 24 V)                                                                                  | 20 | Ext. ignition transformer (supply)    |
| 15 | Bus connection (digital room temperature control/control)                                                                          | 21 | Ionisation signal                     |
| 16 | Fan (1: + 24 V, 2: Hall signal, 4: PWM, 5: Earth)                                                                                  | 22 | Power supply                          |
|    |                                                                                                                                    | 23 | Unit earth                            |



## **Benchmark Commissioning & Warranty Validation Service Record**

It is a requirement that the boiler is installed and commissioned to the manufacturers' instructions and the data fields on the commissioning checklist completed in full.

To instigate the boiler warranty the boiler needs to be registered with the manufacturer within one month of the installation. The warranty rests with the end-user (consumer), and they should be made aware it is ultimately their responsibility to register with the manufacturer, within the allotted time period.

It is essential that the boiler is serviced in line with the manufacturers' recommendations, at least annually. This must be carried out by a competent Gas Safe registered engineer. The service details should be recorded on the Benchmark Service and Interim Boiler Work Record and left with the householder. Failure to comply with the manufacturers' servicing instructions and requirements will invalidate the warranty.



**[www.hhic.co.uk](http://www.hhic.co.uk)**

**This Commissioning Checklist is to be completed in full by the competent person who commissioned the boiler as a means of demonstrating compliance with the appropriate Building Regulations and then handed to the customer to keep for future reference.**

Failure to install and commission according to the manufacturers' instructions and complete this Benchmark Commissioning Checklist will invalidate the warranty. This does not affect the customer's statutory rights.

\* All installations in England and Wales must be notified to Local Authority Building Control (LABC) either directly or through a Competent Persons Scheme. A Building Regulations Compliance Certificate will then be issued to the customer.

© Heating and Hotwater Industry Council (HHIC)



[www.centralheating.co.uk](http://www.centralheating.co.uk)

## GAS BOILER SYSTEM COMMISSIONING CHECKLIST & WARRANTY VALIDATION RECORD

|                                                                                                                                                                                                |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------|--|--------------------|-------------------------------|--------------------------------------------------------|---------------------------------------------------|---------------------|--|---|--|--------------------|--|-------|--|
| Address:                                                                                                                                                                                       |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Boiler make and model:                                                                                                                                                                         |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Boiler serial number:                                                                                                                                                                          |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Commissioned by (PRINT NAME):                                                                                                                                                                  |  |                                          |  |                    | Gas Safe registration number: |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Company name:                                                                                                                                                                                  |  |                                          |  |                    | Telephone number:             |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Company email:                                                                                                                                                                                 |  |                                          |  |                    | Company address:              |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
|                                                                                                                                                                                                |  |                                          |  |                    |                               |                                                        |                                                   | Commissioning date: |  |   |  |                    |  |       |  |
| Heating and hot water system complies with the appropriate Building Regulations? <span style="float: right;">Yes</span>                                                                        |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Optional: Building Regulations Notification Number (if applicable):                                                                                                                            |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Time, temperature control and boiler interlock provided for central heating and hot water <span style="float: right;">Yes</span>                                                               |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Boiler Plus requirements (tick the appropriate box(s))                                                                                                                                         |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Boiler Plus option chosen for combination boiler in ENGLAND                                                                                                                                    |  |                                          |  |                    | Weather compensation          |                                                        | Smart thermostat with automation and optimisation |                     |  |   |  |                    |  |       |  |
|                                                                                                                                                                                                |  |                                          |  |                    | Load compensation             |                                                        | Flue Gas Heat Recovery                            |                     |  |   |  |                    |  |       |  |
| Time and temperature control to hot water                                                                                                                                                      |  | Cylinder thermostat and programmer/timer |  |                    |                               | Combination boiler                                     |                                                   |                     |  |   |  |                    |  |       |  |
| Zone valves                                                                                                                                                                                    |  | pre-existing                             |  | Fitted             |                               | Not required                                           |                                                   |                     |  |   |  |                    |  |       |  |
| Thermostatic radiator valves                                                                                                                                                                   |  | pre-existing                             |  | Fitted             |                               | Not required                                           |                                                   |                     |  |   |  |                    |  |       |  |
| Automatic bypass to system                                                                                                                                                                     |  | pre-existing                             |  | Fitted             |                               | Not required                                           |                                                   |                     |  |   |  |                    |  |       |  |
| Underfloor heating                                                                                                                                                                             |  | pre-existing                             |  | Fitted             |                               | Not required                                           |                                                   |                     |  |   |  |                    |  |       |  |
| Water quality                                                                                                                                                                                  |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| The system has been flushed, cleaned and a suitable inhibitor applied upon final fill, in accordance with BS7593 and boiler manufacturers' instructions <span style="float: right;">Yes</span> |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| What system cleaner was used?                                                                                                                                                                  |  |                                          |  |                    | Brand:                        |                                                        | Product:                                          |                     |  |   |  |                    |  |       |  |
| What inhibitor was used?                                                                                                                                                                       |  |                                          |  |                    | Brand:                        |                                                        | Product:                                          |                     |  |   |  |                    |  |       |  |
| Primary water system filter                                                                                                                                                                    |  | pre-existing                             |  | Fitted             |                               | Not required                                           |                                                   |                     |  |   |  |                    |  |       |  |
| CENTRAL HEATING MODE measure and record (as appropriate)                                                                                                                                       |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Gas rate (for combination boilers complete DHW mode gas rate)                                                                                                                                  |  |                                          |  | m <sup>3</sup> /hr |                               | or                                                     |                                                   | ft <sup>3</sup> /hr |  |   |  |                    |  |       |  |
| Central heating output left at factory settings?                                                                                                                                               |  |                                          |  | Yes                |                               |                                                        |                                                   | No                  |  |   |  |                    |  |       |  |
| If no, what is the maximum central heating output selected?                                                                                                                                    |  |                                          |  |                    |                               |                                                        |                                                   | kW                  |  |   |  |                    |  |       |  |
| Dynamic gas inlet pressure                                                                                                                                                                     |  |                                          |  |                    |                               |                                                        |                                                   | mbar                |  |   |  |                    |  |       |  |
| Central heating flow temperature                                                                                                                                                               |  |                                          |  |                    |                               |                                                        |                                                   | °C                  |  |   |  |                    |  |       |  |
| Central heating return temperature                                                                                                                                                             |  |                                          |  |                    |                               |                                                        |                                                   | °C                  |  |   |  |                    |  |       |  |
| System correctly balanced/rebalanced?                                                                                                                                                          |  |                                          |  | Yes                |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| COMBINATION BOILERS ONLY                                                                                                                                                                       |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Is the installation in a hard water area (above 200ppm)?                                                                                                                                       |  |                                          |  | Yes                |                               |                                                        |                                                   | No                  |  |   |  |                    |  |       |  |
| Water scale reducer/softener                                                                                                                                                                   |  | pre-existing                             |  | Fitted             |                               |                                                        |                                                   | Not required        |  |   |  |                    |  |       |  |
| What type of scale reducer/softener has been fitted?                                                                                                                                           |  |                                          |  | Brand:             |                               | Product:                                               |                                                   |                     |  |   |  |                    |  |       |  |
| Water meter fitted?                                                                                                                                                                            |  |                                          |  | Yes                |                               |                                                        |                                                   | No                  |  |   |  |                    |  |       |  |
| If yes- DHW expansion vessel                                                                                                                                                                   |  | pre-existing                             |  | Fitted             |                               |                                                        |                                                   | Not required        |  |   |  |                    |  |       |  |
| Pressure reducing valve                                                                                                                                                                        |  | pre-existing                             |  | Fitted             |                               |                                                        |                                                   | Not required        |  |   |  |                    |  |       |  |
| DOMESTIC HOT WATER MODE Measure and record                                                                                                                                                     |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Gas rate                                                                                                                                                                                       |  |                                          |  | m <sup>3</sup> /hr |                               | or                                                     |                                                   | ft <sup>3</sup> /hr |  |   |  |                    |  |       |  |
| Dynamic gas inlet pressure at maximum rate                                                                                                                                                     |  |                                          |  |                    |                               |                                                        |                                                   | mbar                |  |   |  |                    |  |       |  |
| Cold water inlet temperature                                                                                                                                                                   |  |                                          |  |                    |                               |                                                        |                                                   | °C                  |  |   |  |                    |  |       |  |
| Hot water has been checked at all outlets                                                                                                                                                      |  |                                          |  | Yes                |                               | Temperature                                            |                                                   | °C                  |  |   |  |                    |  |       |  |
| CONDENSATE DISPOSAL                                                                                                                                                                            |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| The condensate drain has been installed in accordance with the manufacturers' instructions and/or BS5546/BS6798                                                                                |  |                                          |  |                    |                               |                                                        |                                                   | Yes                 |  |   |  |                    |  |       |  |
| Point of termination                                                                                                                                                                           |  |                                          |  | Internal           |                               | External (only where internal termination impractical) |                                                   |                     |  |   |  |                    |  |       |  |
| Method of disposal                                                                                                                                                                             |  |                                          |  | Gravity            |                               | Pumped                                                 |                                                   |                     |  |   |  |                    |  |       |  |
| ALL INSTALLATIONS                                                                                                                                                                              |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Record the following                                                                                                                                                                           |  | At max rate:                             |  | CO                 |                               | ppm                                                    |                                                   | CO <sub>2</sub>     |  | % |  | CO/CO <sub>2</sub> |  | Ratio |  |
|                                                                                                                                                                                                |  | At min rate (where possible)             |  | CO                 |                               | ppm                                                    |                                                   | CO <sub>2</sub>     |  | % |  | CO/CO <sub>2</sub> |  | Ratio |  |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?                                                           |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  | Yes                |  |       |  |
| The operation of the boiler and system controls have been demonstrated to and understood by the customer                                                                                       |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  | Yes                |  |       |  |
| The manufacturers' literature, including Benchmark Checklist and Service Record, has been explained and left with the customer                                                                 |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  | Yes                |  |       |  |
| Commissioning Engineer's signature                                                                                                                                                             |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |
| Customer's signature<br>(To confirm satisfactory demonstration and receipt of manufacturers' literature)                                                                                       |  |                                          |  |                    |                               |                                                        |                                                   |                     |  |   |  |                    |  |       |  |

\* All installations in England and Wales must be notified to Local Authority Building Control (LABC) either directly or through a Competent Persons Scheme. A Building Regulations Compliance Certificate will then be issued to the customer.

© Heating and Hotwater Industry Council (HHIC)



www.centralheating.co.uk

## SERVICE & INTERIM BOILER WORK RECORD

It is recommended that your boiler and heating system are regularly serviced and maintained, in line with manufacturers' instructions, and that the appropriate service / interim work record is completed.

### Service provider

When completing a service record (as below), please ensure you have carried out the service as described in the manufacturers' instructions. Always use the manufacturers' specified spare parts.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> <small>delete as appropriate</small>                                                                         |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? <small>delete as appropriate</small>                                                                                            |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

\* All installations in England and Wales must be notified to Local Authority Building Control (LABC) either directly or through a Competent Persons Scheme. A Building Regulations Compliance Certificate will then be issued to the customer.

© Heating and Hotwater Industry Council (HHIC)



www.centralheating.co.uk

## SERVICE & INTERIM BOILER WORK RECORD

It is recommended that your boiler and heating system are regularly serviced and maintained, in line with manufacturers' instructions, and that the appropriate service / interim work record is completed.

### Service provider

When completing a service record (as below), please ensure you have carried out the service as described in the manufacturers' instructions. Always use the manufacturers' specified spare parts.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

\* All installations in England and Wales must be notified to Local Authority Building Control (LABC) either directly or through a Competent Persons Scheme. A Building Regulations Compliance Certificate will then be issued to the customer.

© Heating and Hotwater Industry Council (HHIC)

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.

|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.


|                                                                                                                                                    |                   |                           |                    |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------|--------------------|----------------------|
| <b>SERVICE/INTERIM WORK ON BOILER</b> delete as appropriate                                                                                        |                   |                           |                    | Date:                |
| Engineer name:                                                                                                                                     |                   | Company name:             |                    |                      |
| Telephone N°:                                                                                                                                      |                   | Gas Safe registration N°: |                    |                      |
| Max rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Min rate                                                                                                                                           | CO                | ppm                       | CO <sub>2</sub>    | % CO/CO <sub>2</sub> |
| Where possible, has a flue integrity check been undertaken in accordance with manufacturers' instructions, and readings are correct?"              |                   |                           |                    | yes                  |
| Gas rate:                                                                                                                                          | m <sup>3</sup> /h | OR                        | ft <sup>3</sup> /h |                      |
| Were parts fitted? delete as appropriate                                                                                                           |                   | Yes                       | No                 |                      |
| Parts fitted:                                                                                                                                      |                   |                           |                    |                      |
| System inhibitor concentration has been checked and appropriate action taken, in accordance with BS 7593 and boiler manufacturers' instructions. * |                   |                           |                    | yes n/a              |
| Comments:                                                                                                                                          |                   |                           |                    |                      |
| Signature:                                                                                                                                         |                   |                           |                    |                      |

\*A System inhibitor efficacy test is required on every annual service in accordance with the manufacturers' instructions and BS 7593. It is only acceptable to not have undertaken this if the service engineers attendance visit was in between annual services to attend a non-water facing component.



www.centralheating.co.uk

## H Commissioning Flow Chart

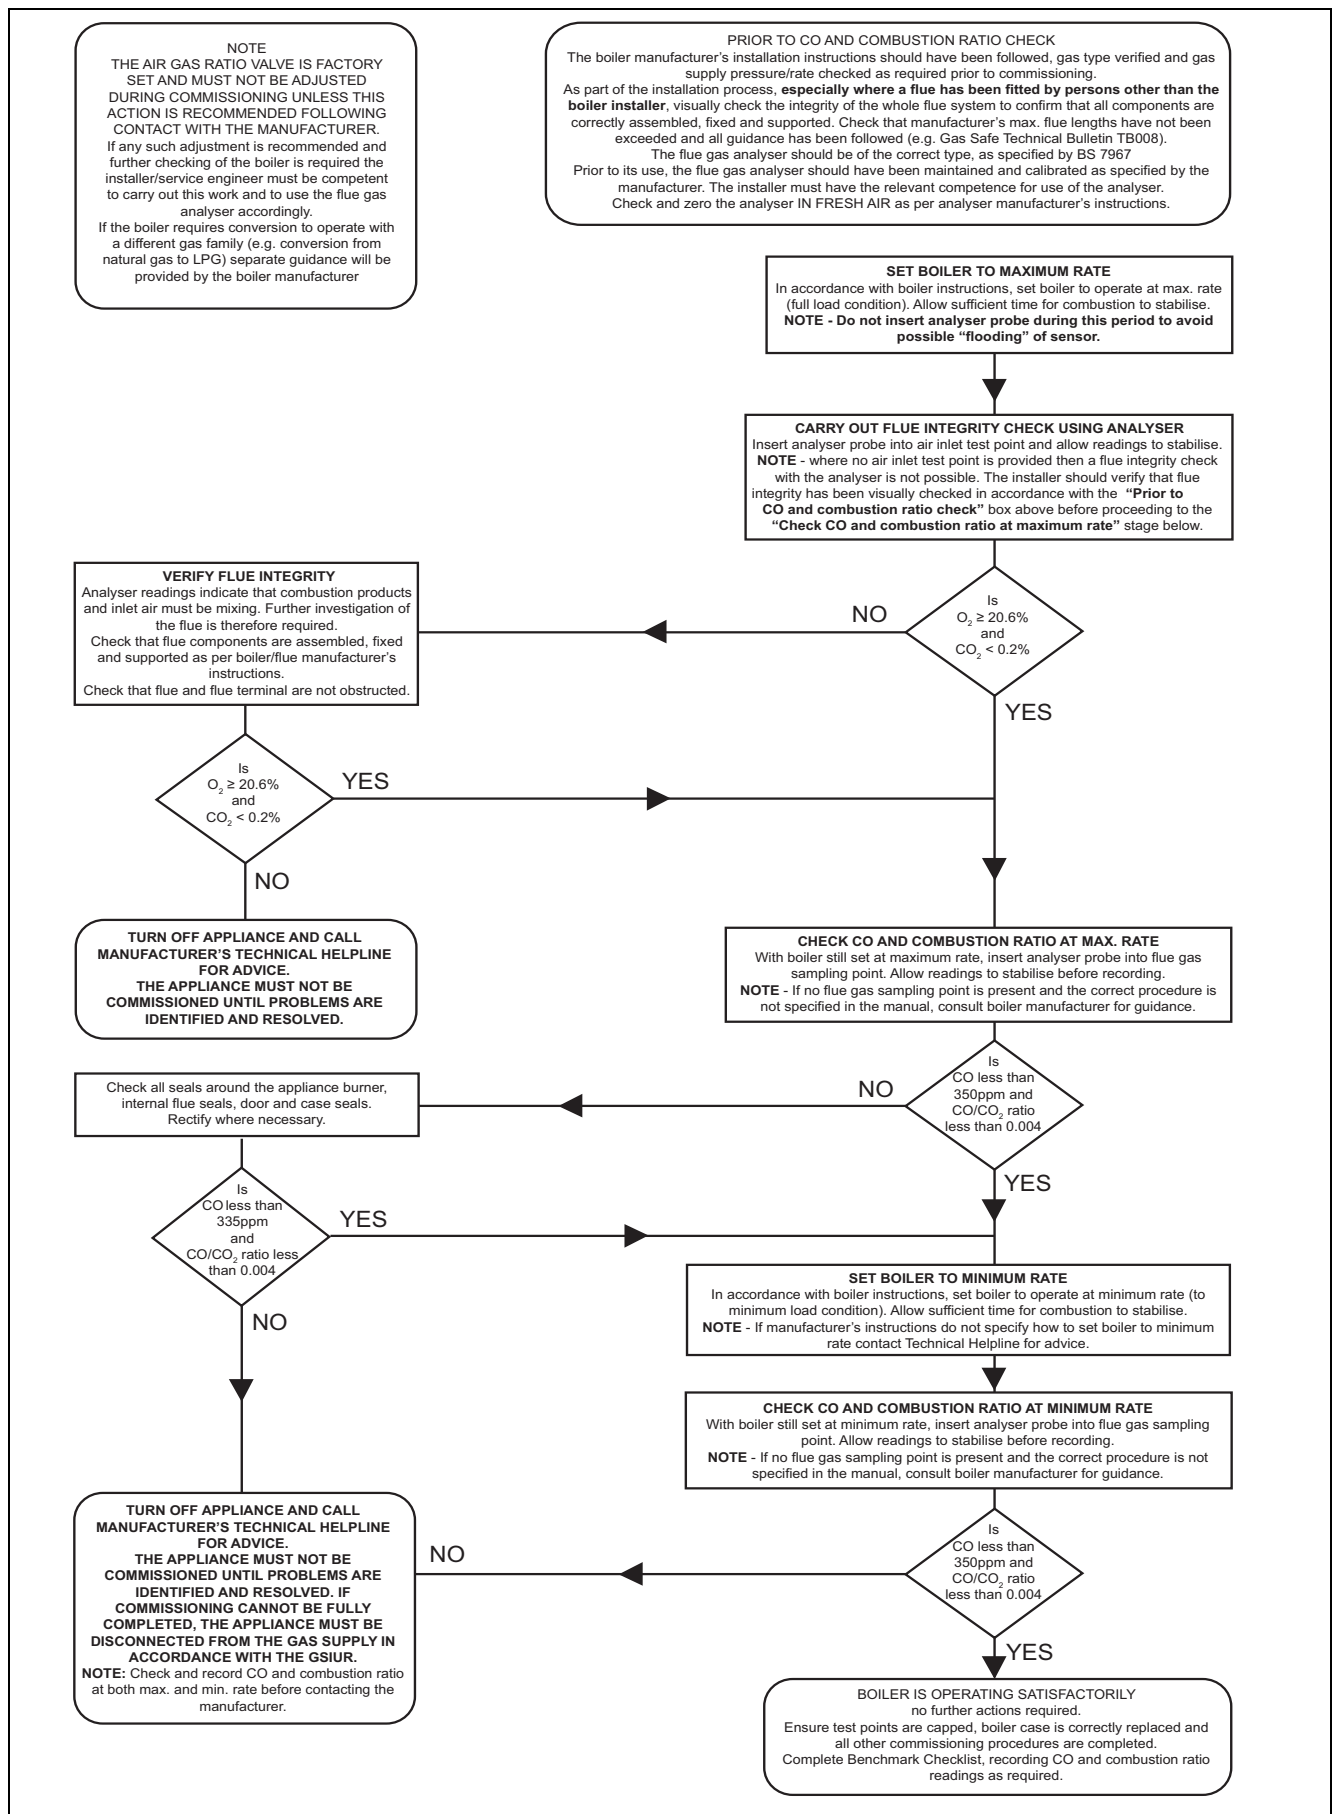

## I Initial start-up checklist

|                         | Location | Competent person | Customer service technician |
|-------------------------|----------|------------------|-----------------------------|
| Name                    |          |                  |                             |
| Street/house number     |          |                  |                             |
| Postcode                |          |                  |                             |
| Town/city               |          |                  |                             |
| Telephone               |          |                  |                             |
| Start-up date           |          |                  |                             |
| Serial number           |          |                  |                             |
| Basic hydraulic diagram |          |                  |                             |

### I.1 Initial start-up checklist

|                                                            | Yes | No | Values | Unit                                         |
|------------------------------------------------------------|-----|----|--------|----------------------------------------------|
| <b>Installation, general</b>                               |     |    |        |                                              |
| Building type (house/apartment building, special building) |     |    |        |                                              |
| Used for commercial purposes?                              |     |    |        |                                              |
| Year of manufacture                                        |     |    |        |                                              |
| Insulation status/renovation                               |     |    |        |                                              |
| System output                                              |     |    |        | kW                                           |
| Previous gas/energy consumption                            |     |    |        | m <sup>3</sup> or kWh/a                      |
| Heated surface                                             |     |    |        | m <sup>2</sup>                               |
| Number of heating circuits                                 |     |    |        |                                              |
| – Underfloor heating circuits                              |     |    |        |                                              |
| – Radiator heating circuits                                |     |    |        |                                              |
| – Fan heating circuits                                     |     |    |        |                                              |
| Water hardness when starting up                            |     |    |        | mol/m <sup>3</sup> or mg/l CaCO <sub>3</sub> |
| Type of cleaning carried out?                              |     |    |        |                                              |
| First flushing (cold) of the heating circuit carried out?  |     |    |        |                                              |
| First flushing (cold) of the boiler carried out?           |     |    |        |                                              |
| Which chemicals used for cleaning?                         |     |    |        |                                              |
| Which treatment of hot flush filling water?                |     |    |        |                                              |
| Second flushing (hot) of the boiler carried out?           |     |    |        |                                              |
| Maintenance schedule for checking levels of inhibitor?     |     |    |        |                                              |
| System volume                                              |     |    |        | l                                            |
| Added additive: Designation, amount                        |     |    |        |                                              |
| <b>Gas supply</b>                                          |     |    |        |                                              |
| Gas type                                                   |     |    |        |                                              |
| Net calorific value                                        |     |    |        | kWh/m <sup>3</sup>                           |
| Gas pressure regulator available?                          |     |    |        |                                              |
| If yes, which type?                                        |     |    |        |                                              |
| <b>Condensate discharge</b>                                |     |    |        |                                              |
| Condensate trap filled?                                    |     |    |        |                                              |
| Condensate discharge pipe routed with a downward gradient? |     |    |        |                                              |
| Neutralisation device available (> 200 kW)?                |     |    |        |                                              |
| If yes, which manufacturer?                                |     |    |        |                                              |
| Condensate pump available (if required)?                   |     |    |        |                                              |
| Condensate pump control line connected?                    |     |    |        |                                              |
| <b>Hydraulics</b>                                          |     |    |        |                                              |
| Heating circuit system pressure                            |     |    |        | MPa (bar)                                    |

|                                                                                                                                                        | Yes | No | Values | Unit      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|--------|-----------|
| Piping at least 1.5" (single unit)                                                                                                                     |     |    |        |           |
| Piping at least DN65 (cascade up to 360 kW)                                                                                                            |     |    |        |           |
| Piping at least DN100 (cascade > 360 kW)                                                                                                               |     |    |        |           |
| Expansion relief valve                                                                                                                                 |     |    |        | MPa (bar) |
| System separation using a plate heat exchanger<br>Which type?                                                                                          |     |    |        |           |
| Number of mixing valves                                                                                                                                |     |    |        |           |
| Cylinder                                                                                                                                               |     |    |        | l         |
| <ul style="list-style-type: none"> <li>– Buffer cylinder (if yes, which type?)</li> <li>– Domestic hot water cylinder (if yes, which type?)</li> </ul> |     |    |        |           |
| Pumps                                                                                                                                                  |     |    |        |           |
| <ul style="list-style-type: none"> <li>– Secondary circuit (if yes, which type?)</li> <li>– Heating circuits (if yes, which type?)</li> </ul>          |     |    |        |           |
| Number of diaphragm expansion vessels                                                                                                                  |     |    |        | l         |
| <ul style="list-style-type: none"> <li>– Primary circuit</li> <li>– Secondary circuit</li> <li>– Heating circuits</li> </ul>                           |     |    |        |           |
| Plate heat exchanger installed correctly?                                                                                                              |     |    |        |           |
| System sensor installed correctly?                                                                                                                     |     |    |        |           |
| Heating circuits sufficiently purged?                                                                                                                  |     |    |        |           |
| <b>When installing a pump without a pump assembly</b>                                                                                                  |     |    |        |           |
| Pressure loss between the pump and the unit < 2 kPa (20 mbar) at 4 m³/h (required)                                                                     |     |    |        |           |
| Distance between the pump and product is less than 0.5 m (required)                                                                                    |     |    |        |           |
| Pump in the return (required)                                                                                                                          |     |    |        |           |
| <b>When using a third-party pump</b>                                                                                                                   |     |    |        |           |
| Pump connected to BMU (signal and voltage) (required)                                                                                                  |     |    |        |           |
| Pump curve at least in accordance with the instructions (required)                                                                                     |     |    |        |           |
| <b>Domestic hot water supply</b>                                                                                                                       |     |    |        |           |
| Energy source (gas or electricity?)                                                                                                                    |     |    |        |           |
| Via unit circuit                                                                                                                                       |     |    |        |           |
| Via heating circuit                                                                                                                                    |     |    |        |           |
| Charging pump available?                                                                                                                               |     |    |        |           |
| If yes, which type?                                                                                                                                    |     |    |        |           |
| At a cylinder size of < 200 l, the cylinder charging output is limited to 30 kW ( <b>D.070</b> )?                                                      |     |    |        |           |
| <b>Flue system</b>                                                                                                                                     |     |    |        |           |
| Installation type (open-flued/room-sealed)                                                                                                             |     |    |        |           |
| For open-flued installation: Large supply air opening                                                                                                  |     |    |        | cm²       |
| Element of the air/flue pipe up to the hearth:                                                                                                         |     |    |        | m or mm   |
| <ul style="list-style-type: none"> <li>– Length</li> <li>– Diameter</li> </ul>                                                                         |     |    |        |           |
| Number of elbows fitted                                                                                                                                |     |    |        |           |
| Hearth                                                                                                                                                 |     |    |        | m or mm   |
| <ul style="list-style-type: none"> <li>– Material</li> <li>– Height</li> <li>– Diameter</li> </ul>                                                     |     |    |        |           |
| <b>Cascade</b>                                                                                                                                         |     |    |        |           |
| Hydr. non-return flaps in the flow line?                                                                                                               |     |    |        |           |
| Motorised flue non-return flaps wired correctly?                                                                                                       |     |    |        |           |
| <b>D.050</b> set to the correct value?                                                                                                                 |     |    |        |           |




|                                                                                    | Yes | No | Values | Unit                                            |
|------------------------------------------------------------------------------------|-----|----|--------|-------------------------------------------------|
| <b>D.027/D.028</b> (switching of relay 2) to 4 (= extraction hood) set?            |     |    |        |                                                 |
| <b>D.090</b> (eBus control) detected?                                              |     |    |        |                                                 |
| Condensate feed pump (if required): Fault message cable connected to each product? |     |    |        |                                                 |
| Other heat generators                                                              |     |    |        |                                                 |
| Solar system, heat pump, solid fuel boiler?<br>If yes, which type?                 |     |    |        |                                                 |
| <b>Control system</b>                                                              |     |    |        |                                                 |
| Vaillant control<br>If yes, which type?                                            |     |    |        |                                                 |
| Third-party control<br>If yes, which type?                                         |     |    |        |                                                 |
| Room control, outdoor temperature control<br>If yes, which type?                   |     |    |        |                                                 |
| Heat demand from which control?                                                    |     |    |        |                                                 |
| Domestic hot water demand from control (internal/external)                         |     |    |        |                                                 |
| Sensor positioned correctly and connected?                                         |     |    |        |                                                 |
| vrnetDIALOG installed correctly, signal available?                                 |     |    |        |                                                 |
| <b>Start-up/default settings</b>                                                   |     |    |        |                                                 |
| CO <sub>2</sub> content at max. via P.1 (before adjustment)                        |     |    |        | Vol. %                                          |
| CO <sub>2</sub> content at max. via P.1 (after adjustment)                         |     |    |        | Vol. %                                          |
| Gas flow pressure at nominal heat loading (max. output for cascades)               |     |    |        | kPa (mbar)                                      |
| CO <sub>2</sub> content at min. via P.2                                            |     |    |        | Vol. %                                          |
| Gas volume flow at P <sub>max</sub> via P.1 (if possible)                          |     |    |        | m <sup>3</sup> /min                             |
| Gas volume flow at P <sub>min</sub> via P.2 (if possible)                          |     |    |        | m <sup>3</sup> /min                             |
| Primary circuit water sample                                                       |     |    |        | mol/m <sup>3</sup> or mg/l<br>CaCO <sub>3</sub> |
| Secondary circuit water sample                                                     |     |    |        | mol/m <sup>3</sup> or mg/l<br>CaCO <sub>3</sub> |
| Heating circuit system pressure                                                    |     |    |        | MPa (bar)                                       |
| Default settings                                                                   |     |    |        |                                                 |
| Partial heat load via <b>D.000</b>                                                 |     |    |        | kW                                              |
| Pump overrun via <b>D.001</b>                                                      |     |    |        | min                                             |
| Max. burner anti-cycling time via <b>D.002</b>                                     |     |    |        | min                                             |
| Max. cylinder charging output via <b>D.077</b>                                     |     |    |        | kW                                              |

## J Treating the heating water

The information in the table below provides a general rule for classifying water hardness.

| Hardness description | Total Hardness                              |                       |                     |                      |
|----------------------|---------------------------------------------|-----------------------|---------------------|----------------------|
|                      | mg/l Calcium carbonate (CaCO <sub>3</sub> ) | UK Degrees Clark (°C) | French Degrees (°f) | German Degrees (°dH) |
| Soft                 | < 150                                       | < 11                  | < 15                | < 9                  |
| Hard                 | 150 - 300                                   | 11 - 21               | 15 - 30             | 9 - 18               |
| Very Hard            | > 300                                       | > 21                  | > 30                | > 18                 |

mg/l = milligrammes per litre = parts per million = ppm

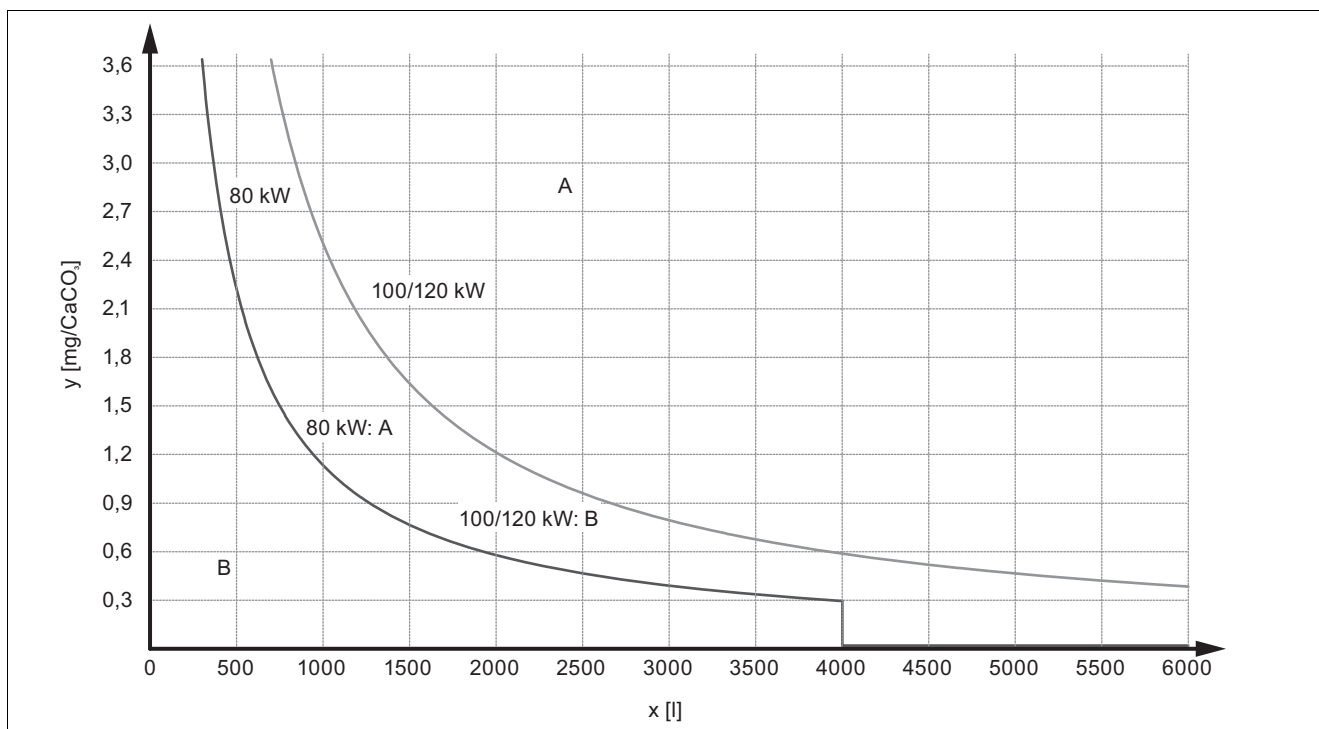

|   |                                          |   |                                                         |
|---|------------------------------------------|---|---------------------------------------------------------|
| x | System volume                            | A | Water treatment required (water softener and inhibitor) |
| y | Water hardness [mg/l CaCO <sub>3</sub> ] | B | Water treatment not required                            |

## Index

|                                                              |            |  |
|--------------------------------------------------------------|------------|--|
| <b>A</b>                                                     |            |  |
| Additional relay .....                                       | 29         |  |
| Air/flue pipe .....                                          | 25         |  |
| Article number .....                                         | 10         |  |
| Automatic air vent .....                                     | 32         |  |
| <b>B</b>                                                     |            |  |
| Burner .....                                                 | 42, 46     |  |
| Burner anti-cycling time .....                               | 36         |  |
| <b>C</b>                                                     |            |  |
| Casing, upper .....                                          | 18         |  |
| CE marking .....                                             | 10         |  |
| Check programme .....                                        | 29         |  |
| Check programmes .....                                       | 30, 45     |  |
| Checking the CO/CO <sub>2</sub> ratio .....                  | 34         |  |
| Checking the O <sub>2</sub> or CO <sub>2</sub> content ..... | 34         |  |
| Circulation pump .....                                       | 27         |  |
| Comfort mode .....                                           | 29         |  |
| Comfort protection mode .....                                | 44         |  |
| Competent person telephone number .....                      | 29         |  |
| Component test .....                                         | 40         |  |
| Condensate discharge pipe .....                              | 22         |  |
| Condensate trap .....                                        | 31, 43     |  |
| Connection dimensions .....                                  | 13         |  |
| Control, connecting .....                                    | 27         |  |
| <b>D</b>                                                     |            |  |
| Data plate .....                                             | 10         |  |
| Decommissioning .....                                        | 48         |  |
| Decommissioning, temporarily .....                           | 48         |  |
| Deleting, fault list .....                                   | 45         |  |
| Diagnostics .....                                            | 45         |  |
| Diagnostics codes .....                                      | 35, 53     |  |
| Display .....                                                | 48         |  |
| Disposal, packaging .....                                    | 48         |  |
| Disposing of the packaging .....                             | 48         |  |
| Documents .....                                              | 10         |  |
| Draining .....                                               | 44         |  |
| <b>E</b>                                                     |            |  |
| Electronics self-test .....                                  | 40         |  |
| Expansion relief valve .....                                 | 22         |  |
| <b>F</b>                                                     |            |  |
| Fan .....                                                    | 47         |  |
| Fault codes .....                                            | 45, 56     |  |
| Fault list .....                                             | 45         |  |
| Fault memory .....                                           | 45         |  |
| Fault symbol .....                                           | 30         |  |
| Filling .....                                                | 32         |  |
| Filling mode .....                                           | 29         |  |
| Filling pressure .....                                       | 31         |  |
| Flow temperature, maximum .....                              | 36         |  |
| Front casing .....                                           | 18         |  |
| Frost protection .....                                       | 11         |  |
| Function menu .....                                          | 40         |  |
| <b>G</b>                                                     |            |  |
| Gas connection .....                                         | 20         |  |
| Gas conversion .....                                         | 32         |  |
| Gas Council Number .....                                     | 10         |  |
| Gas group .....                                              | 20         |  |
| Gas setting .....                                            | 32         |  |
| Gas valve assembly .....                                     | 45         |  |
| Gas-air mixture unit .....                                   | 40, 43     |  |
| Guarantee and Customer Service .....                         | 7          |  |
| <b>H</b>                                                     |            |  |
| Handing over to the end user .....                           | 38         |  |
| Heat exchanger .....                                         | 42, 47     |  |
| Heating flow .....                                           | 21         |  |
| Heating return .....                                         | 21         |  |
| Heating system .....                                         | 32         |  |
| Hot water temperature .....                                  | 29         |  |
| <b>I</b>                                                     |            |  |
| Inspection work, carrying out .....                          | 39         |  |
| Inspection work, completing .....                            | 44         |  |
| Installation assistant .....                                 | 29–30      |  |
| Installation clearances .....                                | 14         |  |
| Installer level, calling up .....                            | 28         |  |
| Insulating mat .....                                         | 47         |  |
| Intended use .....                                           | 4          |  |
| Isolators .....                                              | 48         |  |
| <b>K</b>                                                     |            |  |
| Kammerbelüftung .....                                        | 14         |  |
| <b>L</b>                                                     |            |  |
| Language .....                                               | 29         |  |
| Leak detection spray .....                                   | 6          |  |
| Leak-tightness .....                                         | 35, 44, 48 |  |
| Liquid gas .....                                             | 6, 20      |  |
| Live Monitor .....                                           | 28         |  |
| <b>M</b>                                                     |            |  |
| Maintenance interval .....                                   | 36         |  |
| Maintenance work, carrying out .....                         | 39         |  |
| Maintenance work, completing .....                           | 44         |  |
| Minimum clearances .....                                     | 14         |  |
| Multi-functional module .....                                | 29         |  |
| <b>O</b>                                                     |            |  |
| Operating concept .....                                      | 28         |  |
| Overheating protection .....                                 | 11         |  |
| <b>P</b>                                                     |            |  |
| Parameters .....                                             | 45         |  |
| Partial heat load .....                                      | 29, 35     |  |
| PCB .....                                                    | 48         |  |
| Power supply .....                                           | 26         |  |
| Preparing, maintenance work .....                            | 40         |  |
| Preparing, repair work .....                                 | 45         |  |
| Pressure .....                                               | 31         |  |
| Product dimensions .....                                     | 13         |  |
| Product, switching off .....                                 | 48         |  |
| Pump mode .....                                              | 36         |  |
| Pump output .....                                            | 36         |  |
| Pump overrun .....                                           | 36         |  |
| Purging .....                                                | 32         |  |
| <b>R</b>                                                     |            |  |
| Regulations .....                                            | 6          |  |
| Repair .....                                                 | 45         |  |
| Repair work, completing .....                                | 48         |  |
| Repair work, preparing .....                                 | 40         |  |
| Replacing the burner .....                                   | 46         |  |
| Replacing, display .....                                     | 48         |  |
| Replacing, fan .....                                         | 47         |  |
| Replacing, gas valve assembly .....                          | 45         |  |
| Replacing, heat exchanger .....                              | 47         |  |
| Replacing, PCB .....                                         | 48         |  |
| Resetting the remaining burner anti-cycling time .....       | 36         |  |
| Resetting, fault memory .....                                | 45         |  |
| Resetting, parameters .....                                  | 45         |  |
| Return temperature control .....                             | 36         |  |
| <b>S</b>                                                     |            |  |
| Safety devices .....                                         | 11         |  |

|                                    |        |
|------------------------------------|--------|
| Scale .....                        | 20     |
| Scale deposition .....             | 20     |
| Scope of delivery .....            | 13     |
| Self-test .....                    | 40     |
| Service message .....              | 44     |
| Service partner .....              | 44     |
| Side section .....                 | 19     |
| Spare parts .....                  | 39, 45 |
| Status codes .....                 | 28, 55 |
| Switching on .....                 | 29     |
| <b>T</b>                           |        |
| Target feed temperature .....      | 29     |
| Technical data .....               | 8      |
| Test programmes .....              | 30     |
| Treating the heating water .....   | 30     |
| <b>U</b>                           |        |
| Unit configuration .....           | 29     |
| <b>V</b>                           |        |
| Validity of the instructions ..... | 10     |
| <b>W</b>                           |        |
| Weight .....                       | 18     |



**Supplier****Vaillant Group UK Ltd.**

Nottingham Road ■ Belper ■ Derbyshire ■ DE56 1JT ■ Great Britain

Telephone 0330 100 3143

info@vaillant.co.uk ■ www.vaillant.co.uk



0020134823\_10

**Publisher/manufacture****Vaillant GmbH**

Berghauser Str. 40 ■ 42859 Remscheid ■ Deutschland

Tel. +49 (0)2191 18 0 ■ Fax +49 (0)2191 18 2810

info@vaillant.de ■ www.vaillant.de

© These instructions, or parts thereof, are protected by copyright and may be reproduced or distributed only with the manufacturer's written consent.

Subject to technical modifications.